
STATUTORY RULES OF NORTHERN IRELAND

1996 No. 614

ROAD TRAFFIC AND VEHICLES

**Traffic Signs (Amendment No. 4)
Regulations (Northern Ireland) 1996**

Made - - - - - *30th December 1996*
Coming into operation *10th February 1997*

The Department of the Environment, in exercise of the powers conferred on it by Article 27 of the Road Traffic (Northern Ireland) Order 1981(1) and of every other power enabling it in that behalf, makes the following regulations:

Citation and commencement


1. These regulations may be cited as the Traffic Signs (Amendment No. 4) Regulations (Northern Ireland) 1996 and shall come into operation on 10th February 1997.

Amendment

2. Part III (markings on the road) of Schedule 1 to the Traffic Signs Regulations (Northern Ireland) 1979(2) shall be amended as follows—

- (a) for diagrams 1060, 1060.1, 1061 and 1061.1 and the words under them substitute the following diagrams and words specified in or under them—

(1) S.I.1981/154 (N.I. 1); see Article 2(2) for the definition of “Department”
(2) S.R. 1979 No. 386; relevant amending rules are S.R. 1985 No. 24 and S.R. 1992 No. 133

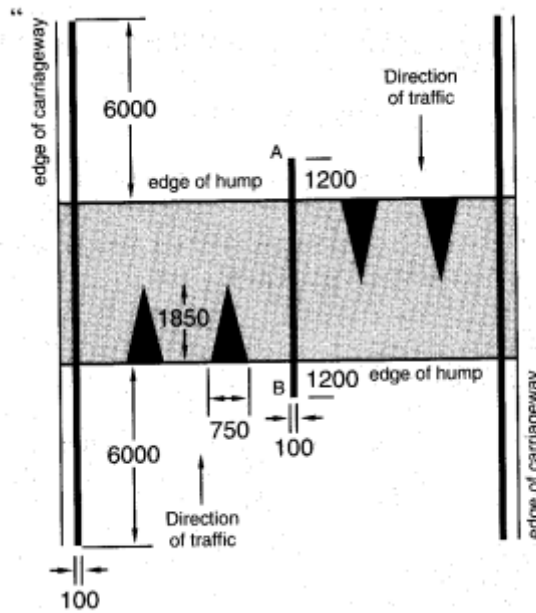

“To indicate to vehicular traffic the presence of a round top road hump extending across the whole width of the carriageway.

Permitted variants:

- (a) The longitudinal line adjacent to the edge of the carriageway may be omitted when the longitudinal line in diagram 1016.1, 1017 or 1018 is placed in the position of that line.
- (b) Where more than one traffic lane is available to traffic proceeding in the same direction, the longitudinal white line marked AB shall be placed between each traffic lane and the two triangular white markings placed on each traffic lane.
- (c) Where traffic is permitted to proceed in one direction only across a hump, the triangular white markings shall be placed only on the side of the road hump facing approaching traffic.
- (d) Where traffic is permitted to proceed in two directions in a single traffic lane across a hump, the two triangular white markings shall be placed on both sides of the hump.
- (e) Where the carriageway width is less than 6,000 millimetres the longitudinal line marked AB shall be omitted.

1060

- (b) Where more than one traffic lane is available to traffic proceeding in the same direction, the longitudinal white line marked AB shall be placed between each traffic lane and the triangular white marking shall be placed on each traffic lane.
- (c) Where traffic is permitted to proceed in one direction only across a cushion type hump, the triangular white marking shall be placed only on the side of the hump facing approaching traffic.
- (d) Where traffic is permitted to proceed in two directions across a single cushion type hump, the triangular white marking shall be placed on both sides of the cushion type hump.
- (e) Where the carriageway width is less than 6,000 millimetres the longitudinal line marked AB shall be omitted.

1062”

Sealed with the Official Seal of the Department of the Environment on 30th December 1996.

J. Carlisle
Assistant Secretary

Status: *This is the original version (as it was originally made). Northern Ireland Statutory Rules are not carried in their revised form on this site.*

EXPLANATORY NOTE

(This note is not part of the Regulations.)

These regulations amend the Traffic Signs Regulations (Northern Ireland) 1979 by—

- (a) substituting new diagrams and permitted variants for diagram numbers 1060 (round top road hump), 1060.1 (round top road hump with tapered ends), 1061 (flat top road hump) and 1061.1 (flat top road hump with tapered ends); and
- (b) prescribing a new road marking (diagram 1062) to indicate to vehicular traffic the presence of cushion type humps.