

SCHEDULE 5

INFORMATION TO BE DISPLAYED ON VEHICLES AND CONTAINERS

PART I


REQUIREMENTS

1. At all times when explosives are being carried in a vehicle—
 - (a) two blank rectangular orange-coloured panels conforming to the requirements of paragraph 4 or 5 shall be affixed to the vehicle, one at the front and the other at the rear;
 - (b) three of each of any danger sign and subsidiary hazard sign required to be displayed under this Schedule shall be affixed to the vehicle, one of each to each side, and one of each to the rear of the vehicle; and
 - (c) where the explosives are carried in a container, one of each of any danger sign and subsidiary hazard sign required to be displayed under this Schedule shall be affixed to the container.

2. Where explosives are being carried in a container in or on a vehicle, it shall be sufficient compliance with paragraph 1(b) if any danger sign or subsidiary hazard sign which is required to be affixed to the vehicle under that sub-paragraph is affixed to the container, provided any such sign is visible from the outside of the vehicle, and positioned as if it had been affixed to the vehicle in accordance with that sub-paragraph.

3. Nothing in this Schedule shall require a danger sign or subsidiary hazard sign of the same specification to be displayed more than once at the rear or on either side of a vehicle.

4. Each panel referred to in paragraph 1(a) shall—
 - (a) be in the form of the following diagram and comply with the measurements in the diagram; and

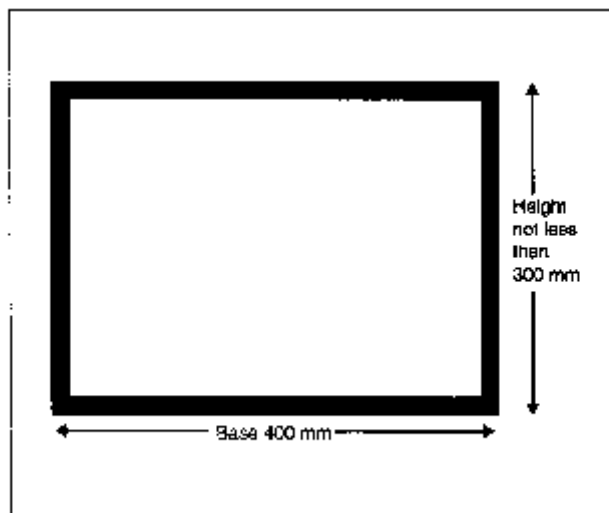

- (b) have a black border not more than 15 millimetres wide.

5. Where the size and construction of the vehicle is such that the available surface area is insufficient to affix a panel of the measurements specified in paragraph 4, that paragraph shall apply

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

as if the specified measurements for the base were 300 millimetres, for the height, 120 millimetres and for the border, 10 millimetres.

6. Each danger sign and subsidiary hazard sign required to be displayed under this Schedule shall—

- (a) be in the form of a square set with its side at an angle of 45° to the vertical; and
- (b) have an orange-coloured background with a black border and any figure, letter or pictograph required by the provisions of this Schedule shall be in black.

7. Each orange-coloured panel, danger sign and subsidiary hazard sign required to be affixed to or displayed under this Schedule shall—


- (a) be clearly visible; and
- (b) so far as is reasonably practicable, be kept clean and free from obstruction at all times when explosives are being carried.

8. Any orange-coloured panel, danger or subsidiary hazard sign, other than one which is displayed under the Carriage of Dangerous Goods Regulations 1996 which does not relate to the explosives being carried, or any residue thereof—

- (a) shall be covered or removed; and
- (b) in the case where an orange-coloured panel is covered, any material used to cover it shall remain effective after 15 minutes engulfment in fire.

9. Where explosives in Division 1.1, 1.2 or 1.3 are carried in a vehicle or container, there shall be displayed in accordance with paragraph 1, danger signs which—

- (a) are in the form of the following diagram (the Division number “1.2” and the Compatibility Group letter “E” are only examples);

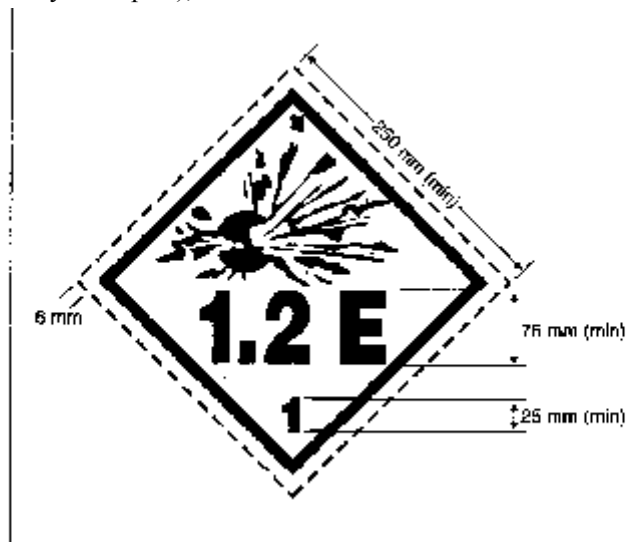


- (b) comply with the measurements in the diagram except that larger measurements may be used in which case the measurements shall be increased proportionally;
- (c) have a pictograph of a bomb blast filling most of the upper half;
- (d) have the Division number and Compatibility Group letter appropriate to the explosives being carried written in the lower half; and
- (e) have the class number “1” written in the bottom corner below the Division number and Compatibility Group letter.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

10. Where explosives in Division 1.4, 1.5 or 1.6 are carried in a vehicle or container, there shall be displayed, in accordance with paragraph 1, danger signs which—

- (a) are in the form of the following diagram (the Division number “1.4” and the Compatibility Group letter “E” are only examples);

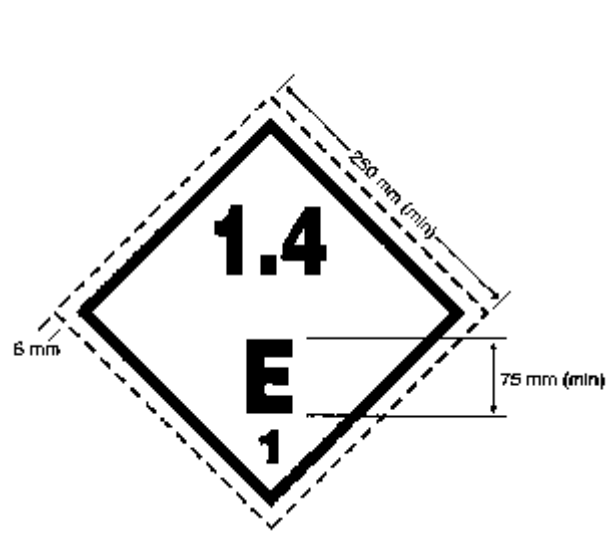


- (b) comply with the measurements in the diagram except that larger measurements may be used in which case the measurements shall be increased proportionally;
- (c) have the Division number appropriate to the explosives being carried written on the upper half;
- (d) have the Compatibility Group letter appropriate to the explosives being carried written on the lower half; and
- (e) have the class number “1” written in the bottom corner below the Compatibility Group letter.

11. In the case of explosives which are carried in a vehicle or container solely in connection with an application for their classification, there shall be displayed, in accordance with paragraph 1, danger signs which—

- (a) are in the form of the following diagram; and

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

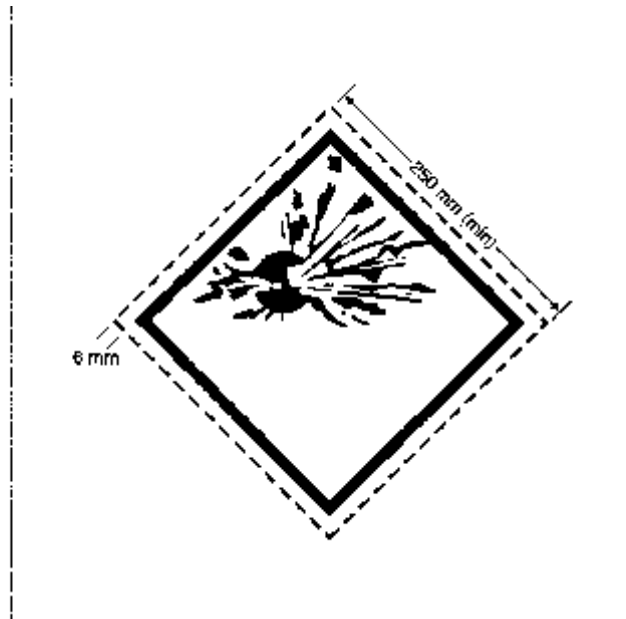

(b) comply with the measurements in the diagram, except that larger measurements may be used in which case the measurements shall be increased proportionally.

12. Where explosives allocated on classification the UN Number 0018, 0019, 0020, 0021, 0076, 0077, 0143, 0224 or 0301 are carried in a vehicle or container, there shall be displayed, in accordance with paragraph 1, subsidiary hazard signs which—

(a) are in the form of the following diagram; and




(b) comply with the measurements in the diagram except that larger measurements may be used in which case the measurements shall be increased proportionally.

13. Where explosives allocated on classification the UN Number 0015, 0016, 0018, 0019, 0301 or 0303 are carried in a vehicle or container, there shall be displayed in accordance with paragraph 1, subsidiary hazard signs which—

(a) are in the form of the following diagram; and

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

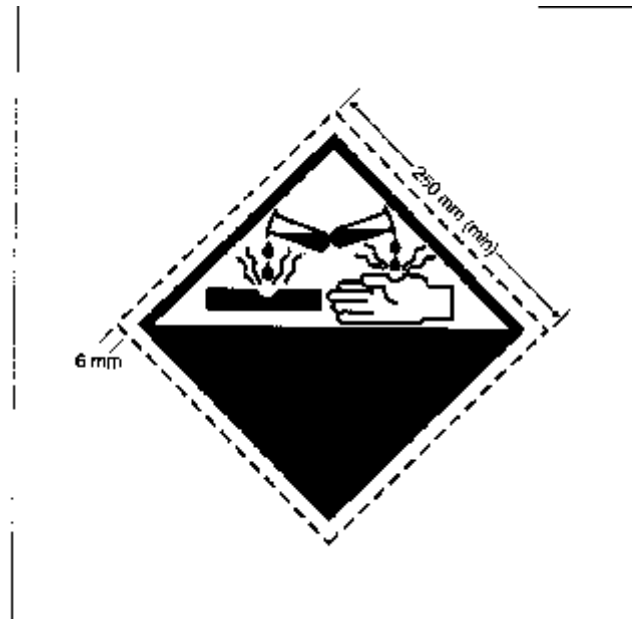

(b) comply with the measurements in the diagram except that larger measurements may be used in which case the measurements shall be increased proportionally.

14. In the case of a vehicle or container carrying explosives of different Compatibility Groups, no Compatibility Group letter shall be written on any danger or subsidiary hazard sign required to be displayed under this Schedule.