

---

STATUTORY INSTRUMENTS

---

**2011 No. 3041**

**ROAD TRAFFIC**

**The Traffic Signs (Amendment) (No. 2)  
Regulations and General Directions 2011**

<i>Made</i>	- - - -	<i>20th December 2011</i>
<i>Laid before Parliament</i>		<i>20th December 2011</i>
<i>Coming into force</i>	- -	<i>30th January 2012</i>

The Secretary of State—

- (a) in exercise of powers conferred by section 64(1), (2), (3) and (5) of the Road Traffic Regulation Act 1984(1) (“the 1984 Act”), makes the regulations contained in Part 1 of this instrument; and
- (b) in exercise of powers conferred by sections 65(1) and 85(2) of the 1984 Act(2), gives the general directions contained in Part 2 of this instrument.

In accordance with article 4 of, and Schedule 3 to, the Scotland Act 1998 (Transfer of Functions to the Scottish Ministers etc) Order 1999(3), the Secretary of State has consulted with the Scottish Ministers.

In relation to the regulations contained in Part 1 of this instrument, the Secretary of State has, in accordance with section 134(2) of the 1984 Act, consulted with such representative organisations as the Secretary of State thought fit.

- 
- (1) [1984 c.27](#). Powers conferred by section 64 on “the Ministers acting jointly” were, by [S.I. 1999/3143](#), transferred to the Secretary of State (see primarily article 2(1)). Functions of a Minister of the Crown under the Road Traffic Regulation Act 1984 are (with exceptions), so far as exercisable in relation to Wales, transferred by [S.I. 1999/672](#) to the National Assembly for Wales. The exceptions include the power in section 64 to prescribe a sign. See primarily article 2 of that instrument, and sub-paragraph (e) of the paragraph commencing with “Road Traffic Regulation Act 1984” in Schedule 1 to that instrument. By virtue of [S.I. 1999/1750](#), functions conferred on a Minister of the Crown by the Road Traffic Regulation Act 1984 shall (with exceptions), so far as the functions are exercisable in or as regards Scotland, be exercisable by the Scottish Ministers instead. The exceptions include the power in section 64 to prescribe a sign. See primarily article 2 of that instrument, and sub-paragraph (d) of the paragraph commencing with “The Road Traffic Regulation Act 1984” in Schedule 1 to that instrument.
  - (2) Section 65(1) was substituted by section 168(1) of, and paragraph 48(2) of Schedule 8 to, the New Roads and Street Works Act 1991 ([c.22](#)). Section 65(1A) was inserted by section 48 of, and paragraph 29 of Schedule 4 to, the Road Traffic Act 1991 ([c.40](#)). Section 65(1A) informs the power in section 65(1), and is relevant to the amendment by this instrument of direction 56 of [S.I. 2002/3113](#). Powers conferred by section 65 on “the Ministers acting jointly” were, by [S.I. 1999/3143](#), transferred to the Secretary of State. Functions of a Minister of the Crown under the Road Traffic Regulation Act 1984 are (with exceptions), so far as exercisable in relation to Wales, transferred by [S.I. 1999/672](#) to the National Assembly for Wales. The exceptions include the power in section 65 to give general directions. See primarily article 2 of that instrument, and sub-paragraph (e) of the paragraph commencing with “Road Traffic Regulation Act 1984” in Schedule 1 to that instrument.
  - (3) [S.I. 1999/1750](#), to which there are amendments not relevant to these regulations.

## PART 1

### The Traffic Signs (Amendment) (No. 2) Regulations 2011

#### Citation, commencement and interpretation

- 1.—(1) These regulations—
  - (a) may be cited as the Traffic Signs (Amendment) (No. 2) Regulations 2011;
  - (b) together with the general directions contained in Part 2 of this instrument, may be cited as the Traffic Signs (Amendment) (No. 2) Regulations and General Directions 2011; and
  - (c) come into force on 30th January 2012.
- (2) In these regulations, “the 2002 regulations” means the Traffic Signs Regulations 2002<sup>(4)</sup>.

#### Preliminary

2. The 2002 regulations are amended as follows.

#### Amendment of regulation 4

- 3.—(1) Regulation 4 (interpretation—general) is amended as follows.
  - (2) After the definition of “cycle track”, insert—

““designated lane” means a traffic lane reserved, by an order under section 1 or 6 of the 1984 Act (traffic regulation orders and orders similar to traffic regulation orders), for use by such class of vehicular traffic as is, by the order, specified for the purpose of that reservation;”.
  - (3) After the definition of “enactment”, insert—

““enforcement agency”, in relation to a sign, means a successor (whether immediate or not) of the Vehicle and Operator Services Agency where that successor is responsible for any enforcement to which the sign relates;”.
  - (4) In the definition of “equestrian crossing”, in paragraph (b)(ii), after “diagram 4003.4” insert “(whether or not placed with the signal shown in diagram 4003.4A)”.
  - (5) In the definition of “maximum laden weight”, for “section 41(8)” substitute “section 41(7)”.
  - (6) In the definition of “signal-controlled pedestrian facility”, in paragraph (c)(ii), after “diagram 4003.1” insert “(whether or not placed with the signal shown in diagram 4003.1A)”.
  - (7) In the definition of “Toucan crossing”, in paragraph (b)(ii), after “diagram 4003.7” insert “(whether or not placed with the signal shown in diagram 4003.7A)”.
  - (8) After the definition of “traffic lane”, insert—

““traffic officer” has the meaning given in section 100(5) of the 1984 Act;”.

#### Amendment of regulation 6

4. In regulation 6 (interpretation of references), in paragraph (f), for “prohibition or speed limit” in both places where it occurs, substitute “prohibition, speed limit or advised maximum speed”.

---

<sup>(4)</sup> Part I of S.I. 2002/3113. Relevant amending instruments are S.I. 2003/2155, 2004/3168, 2005/1670, 2005/2929 (W.214), 2005/3225 (W.237), 2006/594, 2006/2083, 2008/2177, 2011/935 and 2011/1040 and S.S.I. 2005/344 and 2006/129.

#### **Amendment of regulation 10**

5. In regulation 10 (application of section 36 of the Road Traffic Act 1988 to signs and disqualification for offences), in paragraph (1)(f), for “1043, 1044 and” substitute “1043, 1044, 1044.1, 1044.2 and”.

#### **Amendment of regulation 12**

6. In regulation 12 (variations of dimensions), in paragraph (4), after “1001.2,” insert “1001.2A,”.

#### **Amendment of regulation 13**

7. In regulation 13 (proportions and form of letters, numerals, symbols and other characters)—
- (a) in paragraph (2)(c), for “2511, 2512” substitute “2511.1, 2512.1”;
  - (b) in paragraph (2)(e) and (f), for “2919.1” substitute “2919.2”;
  - (c) in paragraph (4)(d), for “2919.1” substitute “2919.2”;
  - (d) in paragraph (7)(c), for “2511, 2512” substitute “2511.1, 2512.1”; and
  - (e) in paragraph (7)(e) and (f), for “2919.1” substitute “2919.2”.

#### **Amendment of regulation 17**

8. In regulation 17 (permitted variants of upright signs), omit paragraph (10).

#### **Amendment of regulation 19**

9. In regulation 19 (illumination of signs—further provisions), in paragraph (4)(c), for “2511, 2512,” substitute “2511.1, 2512.1”.

#### **Amendment of regulation 22**

10. In regulation 22 (buses)—
- (a) in paragraph (1), for “In the signs shown in” substitute “In Part I of Schedule 19 and in the signs shown in”; and
  - (b) in paragraph (2), for “in the signs referred to in paragraph (1)” substitute “in Part I of Schedule 19 and in the signs referred to in paragraph (1)”.

#### **Amendment of regulation 23**

11. In regulation 23 (bus lanes), in paragraph (2)—
- (a) after sub-paragraph (b), omit “and”;
  - (b) in sub-paragraph (c), for “diagram 958 or 959” substitute “diagram 958, 958A, 959 or 959A”; and
  - (c) after sub-paragraph (c), insert—  
“and  
(d) solo motor cycles where indicated on the sign shown in diagram 958A or 959A.”.

#### **Amendment of regulation 24**

12. In regulation 24 (bus symbols), in paragraph (2), for “diagrams 958 and 959” substitute “diagrams 958, 958A, 959 and 959A”.

### **Amendment of regulation 26**

**13.**—(1) Regulation 26 (road markings shown in diagrams 1013.1, 1013.3 and 1013.4: double white lines) is amended as follows.

(2) In paragraph (5)—

(a) in sub-paragraph (b), for the words beginning with “or, in England” and ending with “purposes”, substitute “or, in England and Wales, fire and rescue authority, ambulance, special forces, police or traffic officer purposes”; and

(b) in sub-paragraph (e), after “a constable in uniform or” insert “traffic officer in uniform or”.

(3) In paragraph (6)(h), after “a constable in uniform” insert “, a traffic officer in uniform”.

### **Amendment of regulation 27**

**14.** In regulation 27 (road marking shown in diagram 1001.3: zig-zag lines—no stopping), in paragraph (3)—

(a) in sub-paragraph (a), after “a constable in uniform” insert “, a traffic officer in uniform”;

(b) after sub-paragraph (b), omit “or”;

(c) in sub-paragraph (c), for the words beginning with “or, in England” and ending with “purposes”, substitute “or, in England and Wales, fire and rescue authority, ambulance, special forces or traffic officer purposes”; and

(d) after sub-paragraph (c), omit “or”.

### **Amendment of regulation 29**

**15.** In regulation 29 (the heading to which becomes “Road markings shown in diagrams 1025.1, 1025.3, 1025.4, 1043, 1044, 1044.1 and 1044.2: bus stop and bus stand clearways and box junctions”), in paragraph (2), for “diagrams 1043 and 1044” substitute “diagrams 1043, 1044, 1044.1 and 1044.2”.

### **Amendment of regulation 31**

**16.** In regulation 31 (illumination of road markings), in paragraph (1), after “1001.2,” insert “1001.2A,”.

### **Amendment of regulation 36**

**17.** In regulation 36 (significance of light signals prescribed by regulations 33 to 35), in paragraph (2), after “a constable in uniform” insert “, a traffic officer in uniform”.

### **Substitution of regulation 38**

**18.** For regulation 38 (significance of light signals prescribed by regulation 37(1)), substitute—

“**38.**—(1) The significance of the light signals prescribed by regulation 37(1) shall be as follows.

(2) Subject to paragraph (5), the signals shown in diagram 6032.1 shall convey the prohibition that vehicular traffic on the carriageway beside which the signals are mounted shall not proceed beyond the signals.

(3) Subject to paragraph (5), when displayed over the carriageway of a road, the signals shown in diagram 6031.1 shall convey the prohibition that vehicular traffic proceeding in the traffic lane immediately below the signals shall not proceed beyond them in that lane.

(4) Subject to paragraph (5), when displayed over an actively managed hard shoulder, the signals shown in diagram 6031.1 shall convey the prohibition that vehicular traffic shall not enter the hard shoulder beyond the signals for any purpose.

(5) The prohibition mentioned in paragraph (2), (3) or (4), as the case may be, shall not apply—

(a) to a vehicle being used—

(i) for any of the purposes mentioned in regulation 36(1)(b); or

(ii) for traffic officer purposes,

when the observance of that prohibition would be likely to hinder the use of that vehicle for the purpose for which it is being used; or

(b) to a vehicle being used for special forces purposes.”.

### **Amendment of regulation 43**

**19.**—(1) Regulation 43 (meaning of stop line and references to light signals) is amended as follows.

(2) In paragraph (2)—

(a) after “Where the road marking shown in diagram 1001.2” insert “or 1001.2A”; and

(b) in sub-paragraphs (a) and (b), after “a pedal cycle proceeding in the cycle lane” in each place where it occurs, insert “or through the cycle entry”.

(3) In paragraph (5)(c)—

(a) in sub-paragraph (i), after “the road markings shown in” insert “diagram 1001.2A or in”;

(b) in sub-paragraph (ii), for “in either version of that diagram” substitute “in diagram 1001.2A or in either version of diagram 1001.2”;

(c) after sub-paragraph (ii), omit “and”; and

(d) after sub-paragraph (iii), insert—

“and

(iv) “the cycle entry” means the diagonal broken line shown in diagram 1001.2A.

### **Amendment of regulation 46**

**20.** In regulation 46 (matrix signs for motorways and all-purpose dual carriageway roads), in paragraphs (1), (3) and (5), for “speed limit” in each place where it occurs, substitute “advised maximum speed”.

### **Amendment of regulation 47**

**21.**—(1) Regulation 47 (light signals at signal-controlled pedestrian facilities) is amended as follows.

(2) After paragraph (2), insert—

“(2A) Where a sign consisting of either a single unit of the size, colour and type shown in diagram 4003.1 or of two units, one comprising the upper and the other the lower part of that unit placed close together, is placed in relation to a crossing—

(a) any additional device for causing the green signal in that sign to become illuminated shall—

(i) be of the size, colour and type of only the part of that sign which includes the push button and the legend above it; and

- (ii) comply with the requirements of paragraph (3)(e) so far as relevant to it; and
- (b) any additional sign for conveying to pedestrian traffic the warning and information specified in paragraph (4) shall—
  - (i) be of the size, colour and type shown in diagram 4003.1A; and
  - (ii) comply with the requirements of paragraph (3).”.
- (3) Omit paragraph (5).

#### **Amendment of regulation 48**

- 22.**—(1) Regulation 48 (light signals at equestrian crossings) is amended as follows.
- (2) After paragraph (2), insert—
- “(2A) Where a sign consisting of either a single unit of the size, colour and type shown in diagram 4003.4 or of two units, one comprising the upper and the other the lower part of that unit placed close together, is placed in relation to a crossing—
- (a) any additional device for causing the green signal in that sign to become illuminated shall—
    - (i) be of the size, colour and type of only the part of that sign which includes the push button and the legend above it; and
    - (ii) comply with the requirements of paragraph (3)(e) so far as relevant to it; and
  - (b) any additional sign for conveying to equestrian traffic the warning and information specified in paragraph (4) shall—
    - (i) be of the size, colour and type shown in diagram 4003.4A; and
    - (ii) comply with the requirements of paragraph (3).”.
- (3) Omit paragraph (5).

#### **Amendment of regulation 49**

- 23.**—(1) Regulation 49 (light signals at Toucan crossings) is amended as follows.
- (2) After paragraph (2), insert—
- “(2A) Where a sign consisting of either a single unit of the size, colour and type shown in diagram 4003.7 or of two units, one comprising the upper and the other the lower part of that unit placed close together, is placed in relation to a crossing—
- (a) any additional device for causing the green signal in that sign to become illuminated shall—
    - (i) be of the size, colour and type of only the part of that sign which includes the push button and the legend above it; and
    - (ii) comply with the requirements of paragraph (3)(e) so far as relevant to it; and
  - (b) any additional sign for conveying to pedestrians and pedal cyclists the warning and information specified in paragraph (4) shall—
    - (i) be of the size, colour and type shown in diagram 4003.7A; and
    - (ii) comply with the requirements of paragraph (3).”.
- (3) For paragraph (3)(a), substitute—
- “(a) the—
- (i) red figures (“the red signal”) in the signs shown in diagrams 4003.5, 4003.7 and 4003.7A; and

(ii) red cycle symbol (“the red signal”) in diagrams 4003.7 and 4003.7A, can be internally illuminated by a steady light;”.

(4) Omit paragraph (5).

#### **Amendment of regulation 51**

**24.** In regulation 51 (cattle crossing signs and warning lights), in paragraph (1), after “A sign of the size, colour and type shown in diagram 4005” insert “, and which has ES compliant signal heads,”.

#### **Amendment of regulation 53**

**25.**—(1) Regulation 53 (temporary signs) is amended as follows.

(2) In paragraph (1)—

(a) after sub-paragraph (e)(iv), omit “or”; and

(b) after sub-paragraph (f), insert—

“or

(g) warnings, or information, about—

(i) a civil emergency; or

(ii) the prospect of a civil emergency.”.

(3) After paragraph (6), insert—

“(7) In this regulation, “a civil emergency” means—

(a) an emergency within the meaning of section 1 of the Civil Contingencies Act 2004<sup>(5)</sup>; or

(b) terrorism within the meaning of section 1 of the Terrorism Act 2000<sup>(6)</sup>.”.

#### **Amendment of regulation 54**

**26.** In regulation 54 (flashing beacons), in paragraph (2)(c), for “450” substitute “150”.

#### **Substitution of regulation 55**

**27.** For regulation 55 (road danger lamps) and the heading to it, substitute—

##### **“Warning lights**

**55.**—(1) A lamp for indicating to traffic the limits of a temporary obstruction of the road (a “warning light”) shall comply with the requirements in paragraphs (2), (3), (4), (5) and (6).

(2) The height of the centre of each lens of the warning light from the surface of the road in the immediate vicinity of the lamp shall not exceed 1500 millimetres where the speed limit on the road is 40 mph or less, or 1200 millimetres where the speed limit on the road is more than 40 mph.

(3) The warning light—

(a) shall be powered separately from any other object or device; and

---

<sup>(5)</sup> 2004 c.36.

<sup>(6)</sup> 2000 c.11. Section 1(1)(b) was amended by section 34(a) of the Terrorism Act 2006 (c.11). Section 1(1)(c) was amended by section 75(1) and (2)(a) of the Counter-Terrorism Act 2008 (c.28).

- (b) shall show a steady or intermittent amber light.
- (4) Subject to paragraphs (5) and (6), the whole of the warning light shall conform—
- (a) to British Standard BS EN 12352:2006 incorporating corrigenda July 2008 and July 2009; or
- (b) to a corresponding EEA Standard.
- (5) In relation to each aspect of performance specified in column (2) of an item in the Table, the warning light shall comply with—
- (a) the requirement or test specification of British Standard BS EN 12352:2006 incorporating corrigenda July 2008 and July 2009 specified in column (3) of the item; or
- (b) an equivalent requirement or test specification specified in a corresponding EEA Standard.

**Table**

(1) Item	(2) Aspect of performance	(3) Requirement or test specification and class
1.	Area, angle and luminous intensity	Class L1 or L3 in Table 1
2.	Light emitting surface	For class L1 lights: paragraph 4.1.2.1 For class L3 lights: class P1
3.	Colorimetric performance of light emitted	Class C yellow 1 in Table 2
4.	Retro-reflective device	Class R2
5.	Automatic photosensitive switching	Class A1
6.	Continuity of emitted light	Class F1 (steady) or class F2 (but see NOTE 1 and NOTE 2)
7.	On-time (flashing lights)	Class O2
8.	Mechanical strength	Class M4

NOTE 1: A light flashing at a rate of 900 flashes per minute or more shall be deemed to comply with class F1.

NOTE 2: A light manufactured before 1st January 2011 and having a flash rate of not less than 75 nor more than 150 flashes per minute shall be deemed to comply with the requirements of item 6 until and including 31st December 2015.

- (6) The external surface of the parts of the warning light which are not the lenses and are visible to road users shall be of a colour having the colorimetric values—
- (a) of reference 355 Lemon, or reference 356 Golden yellow, in Table 1 (standard colours) of British Standard BS 381C : 1996; or
- (b) of an equivalent reference specified in a corresponding EEA Standard.”.

#### **Amendment of regulation 56**

- 28.**—(1) Regulation 56 (cones, delineators and cylinders) is amended as follows.
- (2) For paragraph (2), substitute—



- “(2) A cone shall consist of a conically shaped device—
- (a) the base of which—
    - (i) is of any single colour; and
    - (ii) is a polygon, having not more than eight sides, which would be contained wholly within a circle with a diameter of three quarters of the height of the cone; and
  - (b) which, subject to paragraph (15), conforms to British Standard BS EN 13422:2004+A1:2009 or to a corresponding EEA Standard.”.

(3) In paragraph (5), for “British Standard Specification BS873: Part 8: 1985” substitute “British Standard BS EN 13422:2004+A1:2009”.

(4) In paragraph (7), for sub-paragraph (b), substitute—

“(b) which conforms to British Standard BS 8442:2006 or to a corresponding EEA Standard;”.

(5) In paragraph (10), for “British Standard Specification BS 873: Part 8: 1985” substitute “British Standard BS EN 13422:2004+A1:2009”.

(6) In paragraph (11), for “made of rubber or flexible plastic material” substitute “which, subject to paragraph (15), conforms to British Standard BS EN 13422:2004+A1:2009 or to a corresponding EEA Standard”.

(7) In paragraph (14), for “British Standard Specification BS873: Part 8: 1985” substitute “British Standard BS EN 13422:2004+A1:2009”.

(8) After paragraph (14), insert—

“(15) In relation to each aspect of performance specified in column (2) of an item in the Table, a cone or cylinder shall comply with—

- (a) the requirement or test specification of British Standard BS EN 13422:2004+A1:2009 specified in column (3) of the item; or
- (b) an equivalent requirement or test specification specified in a corresponding EEA Standard.

**Table**

(1) Item	(2) Aspect of performance	(3) Requirement or test specification and class
1.	Daylight chromaticity co-ordinates and luminance factors	Retroreflective material: Class LB in Table 2
		Non-retroreflective exterior surfaces: Table 3.A
		Non-retroreflective interior surfaces: Table 3.B
2.	Coefficient of retroreflection	Dry conditions: Class R1B or R2B in Table 4.B

(1) Item	(2) Aspect of performance	(3) Requirement or test specification and class
		Wet conditions: Class WT 1 in Table 6
3.	Height and minimum weight (cones)	Class W3 in Table 1”

### Amendment of regulation 58

**29.**—(1) Regulation 58 (variable message signs) is amended as follows.

(2) After paragraph (2), insert—

“(2A) When a variable message sign displays—

- (a) a sign shown in a diagram in Schedule 11 (except diagram 6031.1); or
- (b) a legend of the type shown in Schedule 15,

any symbol or legend may be displayed in white, off-white or yellow on a dark background.”.

(3) After paragraph (9) insert—

“(10) When a variable message sign displays any of the following messages—

- (a) a sign referred to in paragraph (1)(a) or (c);
- (b) a legend referred to in paragraph (1)(b); or
- (c) a sign referred to in sub-paragraph (a) or (b) of paragraph (7) accompanied, in accordance with that paragraph, by the legend “SLOW DOWN”,

the variable message sign shall display the whole of that message at the same time.”.

### Amendment of Schedule 16

**30.**—(1) Schedule 16 (permitted variants) is amended as follows.

(2) In column (2) of item 1—

- (a) after “530,” insert “530A,”;
- (b) for “532.2, 532.3,” substitute “532.2, 532.2A, 532.3, 532.3A,”;
- (c) after “818.3 (other than in respect of distance),” insert “818.5,”; and
- (d) after “6001,” insert “7014.1,”.

(3) Omit—

“2.	629.1	Metric units to one decimal place of a metre may be substituted for imperial units when the sign is placed in combination with another sign shown in diagram 629.1 which has not been so varied.”
-----	-------	---

(4) In column (2) of item 3—

- (a) omit “2601.1,”; and

- (b) for “2511, 2512,” substitute “2511.1, 2512.1.”
- (5) In column (2) of item 5, after “2602.1,” insert “2602.1A.”
- (6) In item 6—
  - (a) in column (2)—
    - (i) after “and 818.3 (in respect of distance),” insert “818.4, 818.5.”;
    - (ii) for “2511, 2512,” substitute “2511.1, 2512.1.”; and
    - (iii) after “2701.1,” insert “2711.1.”; and
  - (b) in column (3)—
    - (i) in paragraph (1), for “Numerals indicating distance” substitute “Subject to paragraph (4), numerals indicating distance”;
    - (ii) in paragraph (2), for “diagram 2316” substitute “diagram 818.3”; and
    - (iii) after paragraph (3), insert—
      - “(4) Where emergency exits are more than 880 yards apart, distances shown on the sign shown in diagram 2711.1 shall be expressed in miles to the nearest  $\frac{1}{4}$  mile with the fractions  $\frac{3}{4}$ ,  $\frac{1}{2}$  and  $\frac{1}{4}$  being used.”.
- (7) In column (2) of item 8—
  - (a) for “2310.1” substitute “2310.2”; and
  - (b) for “2919.1\*” substitute “2919.2\*”.
- (8) In column (2) of item 9—
  - (a) after “2508,” insert “2601.1.”; and
  - (b) after “2602.1,” insert “2602.1A.”.
- (9) In column (2) of item 11—
  - (a) after “660.6,” insert “660.8, 660.9.”;
  - (b) omit “818.3, 818.4.”; and
  - (c) after “820,” insert “820A.”.
- (10) In column (2) of item 12—
  - (a) for “2511” substitute “2511.1.”; and
  - (b) after “2601.1,” insert “2601.1A, 2602.1A, 2602.1C.”.
- (11) In column (2) of item 13, after “2711\*,” insert “2711.1\*.”.
- (12) In column (2) of item 15—
  - (a) for “2512” substitute “2512.1.”; and
  - (b) after “2602.1,” insert “2602.1B.”.
- (13) In column (2) of item 16, after “2513,” insert “2601.1, 2601.1A.”.
- (14) In column (2) of item 19—
  - (a) after “818.4,” insert “818.5.”;
  - (b) after “2601.1,” insert “2601.1A.”; and
  - (c) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C.”.
- (15) In column (2) of item 20—
  - (a) after “818.4\*\*,” insert “818.5\*\*.”;
  - (b) after “2601.1,” insert “2601.1A.”; and

- (c) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C.”
- (16) In column (2) of item 28—
- (a) after “818.4,” insert “820A,”;
  - (b) after “2329,” insert “2502,”;
  - (c) for “2511, 2512,” substitute “2511.1, 2512.1,”;
  - (d) omit “2602.1,”;
  - (e) after “2711,” insert “2711.1,”;
  - (f) after “4003.1,” insert “4003.1A,”; and
  - (g) after “4003.4,” insert “4003.4A.”
- (17) In column (2) of item 29, omit “2602.1.”
- (18) In item 31—
- (a) in column (2), for “2511\*, 2512\*,” substitute “2511.1\*, 2512.1\*,”; and
  - (b) in column (3), after “530,” insert “530A.”
- (19) In item 34—
- (a) in column (2)—
    - (i) for “2511, 2512,” substitute “2511.1, 2512.1,”;
    - (ii) after “2601.1,” insert “2601.1A,”; and
    - (iii) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C,”; and
  - (b) in paragraph (7) of column (3), for “2310.1” substitute “814.2”.
- (20) In column (2) of item 38—
- (a) after “637.2\*,” insert “637.2A\*,”;
  - (b) after “660.7,” insert “660.9,”;
  - (c) after “663.1,” insert “663.2, 663.3,”;
  - (d) omit “962.2,”; and
  - (e) for “2511, 2512,” substitute “2511.1, 2512.1.”
- (21) In column (2) of item 39—
- (a) after “660.7,” insert “660.9,”; and
  - (b) after “663.1” insert “, 663.2, 663.3”.
- (22) After item 46, insert—

“47.	3000	Where the character or layout of the road restricts the visibility of the signals shown in the diagram, the maximum height of 4000 millimetres may be increased as appropriate to a maximum of 6100 millimetres.”
------	------	---

### **Amendment of Schedule 17**

**31.**—(1) Schedule 17 (illumination of signs) is amended as follows.

- (2) In item 1—
- (a) in column (2)—
    - (i) after “530,” insert “530A,”;

- (ii) for—

“532.2 (in respect of the triangle symbols), 532.3 (in respect of the triangle symbols),”  
substitute—  
“532.2 (in respect of the triangle symbols), 532.2A (in respect of the triangle symbols), 532.3 (in respect of the triangle symbols), 532.3A (in respect of the triangle symbols),”;
- (iii) for “7004, 7005, 7006,” substitute “7004\*\*, 7005\*\*, 7006\*\*,”; and
- (iv) for—

“7201, 7201.1, 7202, 7203, 7203.1, 7204, 7205, 7206, 7207, 7208, 7210, 7211.1, 7212, 7213, 7214, 7215, 7216, 7217, 7218, 7220, 7221, 7230, 7231, 7232, 7233, 7234, 7235, 7236, 7237, 7238, 7239, 7240, 7241, 7242, 7250, 7251, 7252, 7253, 7254, 7255, 7256, 7260, 7261, 7262, 7263, 7264, 7270, 7271, 7272, 7274, 7275, 7290, 7291, 7292, 7293, 7294”  
substitute—  
“7201\*\*, 7201.1\*\*, 7202\*\*, 7203\*\*, 7203.1\*\*, 7204\*\*, 7205\*\*, 7206\*\*, 7207\*\*, 7208\*\*, 7210\*\*, 7211.1\*\*, 7212\*\*, 7213\*\*, 7214\*\*, 7215\*\*, 7216\*\*, 7217\*\*, 7218\*\*, 7220\*\*, 7221\*\*, 7230\*\*, 7231\*\*, 7232\*\*, 7233\*\*, 7234\*\*, 7235\*\*, 7236\*\*, 7237\*\*, 7238\*\*, 7239\*\*, 7240\*\*, 7241\*\*, 7242\*\*, 7250\*\*, 7251\*\*, 7252\*\*, 7253\*\*, 7254\*\*, 7255\*\*, 7256\*\*, 7260\*\*, 7261\*\*, 7262\*\*, 7263\*\*, 7264\*\*, 7270\*\*, 7271\*\*, 7272\*\*, 7274\*\*, 7275\*\*, 7290\*\*, 7291\*\*, 7292\*\*, 7293\*\*, 7294\*\*,”; and
- (b) in column (3), after paragraph (4) insert—

“(5) In addition to such of the requirements in paragraphs (1) to (4) as apply to a sign, where a sign is shown in a diagram whose number is marked with two asterisks in column (2), the part of that sign coloured yellow may be fluorescent.”.
- (3) In column (2) of item 2, after “2711” insert “, 2711.1”.
- (4) In item 4—
  - (a) in column (2)—
    - (i) after “528.1,” insert “543.1 (when mounted on a post or support pursuant to direction 44A(5)),”;
    - (ii) for “663.1, 664,” substitute “663.1, 663.2, 663.3, 664, 664.1,”;
    - (iii) for “820,” substitute “818.5, 820, 820A,”;
    - (iv) for “832.1A, 832.2A,” substitute “832.1B, 832.2B,”;
    - (v) for “958.1, 959, 959.1, 960, 960.1,” substitute “958A, 958.1, 959, 959A, 959.1, 960, 960.1, 960.2,”;
    - (vi) for “2310.1” substitute “2310.2”;
    - (vii) for “2511, 2512,” substitute “2511.1, 2512.1,”;
    - (viii) for “2702”, “2703”, “2704”, “2705”, “2706”, “2707” and “2716” substitute respectively “2702\*”, “2703\*”, “2704\*”, “2705\*”, “2706\*”, “2707\*” and “2716\*”;
    - (ix) for “2919.1” substitute “2919.2”; and
    - (x) for “7002A”, “7002B”, “7002.1”, “7003.1”, “7006.1”, “7402” and “7403” substitute respectively “7002A\*”, “7002B\*”, “7002.1\*”, “7003.1\*”, “7006.1\*”, “7402\*” and “7403\*”; and

(b) in column (3), for—

“The sign may be illuminated by a means of internal or external lighting but, if not so illuminated throughout the hours of darkness, it shall be reflectorised in accordance with regulation 19.”

substitute —

“(1) The sign may be illuminated by a means of internal or external lighting but, if not so illuminated throughout the hours of darkness, it shall be reflectorised in accordance with regulation 19(3) and (4).

(2) In addition to the requirement in paragraph (1), where a sign is shown in a diagram whose number is marked with an asterisk in column (2), the part of that sign coloured yellow may be fluorescent.”

(5) In column (2) of item 6, after “614,” insert “616,”.

(6) In column (2) of item 8, after “7001.2,” insert “7009.1,”.

(7) In column (2) of item 9—

- (a) for “532.2 and 532.3” substitute “532.2, 532.2A, 532.3 and 532.3A”;
- (b) after “637.2,” insert “637.2A,”;
- (c) after “660.7,” insert “660.8, 660.9,”;
- (d) after “2601.1,” insert “2601.1A,”; and
- (e) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C,”.

(8) In column (2) of item 12—

- (a) after “1001.2,” insert “1001.2A,”; and
- (b) after “1043, 1044,” insert “1044.1, 1044.2,”.

(9) After item 16, insert—

“17.	7014.1	<p>(1) Where the sign is placed pursuant to direction 37 in connection with works involving a temporary reduction in height, it—</p> <ul style="list-style-type: none"> <li>(a) shall be reflectorised in accordance with regulation 19(3) and (4); and</li> <li>(b) may also be illuminated by a means of internal or external lighting.</li> </ul> <p>(2) Where the sign—</p> <ul style="list-style-type: none"> <li>(a) is placed pursuant to direction 37 in connection with works involving a permanent reduction in height; and</li> <li>(b) is erected on a road within 50 metres of any lamp lit by electricity which forms part of a system of street-lighting for that road furnished by means of at least three such lamps placed not more than 183 metres (in Scotland 185 metres) apart,</li> </ul> <p>it shall be illuminated by a means of internal or external lighting either for so long as that</p>
------	--------	--

	system is illuminated, or throughout the hours of darkness, and may also be reflectorised.”
--	---

**Amendment of Part I of Schedule 19**

**32.**—(1) Part I of Schedule 19 (significance of bus stop and bus stand clearway markings) is amended as follows.

(2) For paragraph 3, substitute—

“**3.**—(1) Where the sign shown in diagram 974 or 975 is placed and is not varied to “except local buses”, nothing in paragraph 2 applies to the driver of a bus who causes the bus to stop within the clearway for so long as may be necessary—

- (a) to maintain a published timetable for the service (provided, in the case of a bus stop clearway, that the bus is not stopped within the clearway for a period exceeding two minutes);
- (b) to enable passengers to board or alight from the bus; or
- (c) to enable the crew of the bus to be changed.

(2) Where the sign shown in diagram 974 or 975 is placed and is varied to “except local buses”, nothing in paragraph 2 applies to the driver of a bus being used in the provision of a local service who causes the bus to stop within the clearway for so long as may be necessary—

- (a) to maintain a published timetable for the service (provided, in the case of a bus stop clearway, that the bus is not stopped within the clearway for a period exceeding two minutes);
- (b) to enable passengers to board or alight from the bus; or
- (c) to enable the crew of the bus to be changed.”.

(3) In paragraph 4(1) (other exceptions)—

- (a) in sub-paragraph (a), for “or police purposes” substitute “, police or traffic officer purposes”; and
- (b) in sub-paragraph (b)—
  - (i) after sub-paragraph (ii), omit “or”; and
  - (ii) after sub-paragraph (iii), insert—
    - “or
    - (iv) a traffic officer in uniform;”.

**Amendment of Part II of Schedule 19**

**33.**—(1) Part II of Schedule 19 (significance of box junction markings) is amended as follows.

(2) In paragraph 6, for—

“(a) “box junction” means the area of carriageway marked with yellow cross-hatching at a junction between two or more roads on which there has been placed the road marking shown in diagram 1043 or 1044; and”

substitute—

- “(a) “box junction” means the area of carriageway marked with yellow cross-hatching—
  - (i) at a junction between two or more roads;
  - (ii) at a gyratory system or roundabout;

(iii) where that area of carriageway is not greater than 4.5 metres wide at its narrowest point; or

(iv) on the length of road adjacent to the vehicular entrance to the premises of a fire, police or ambulance station,

on which there has been placed the road marking shown in diagram 1043, 1044, 1044.1 or 1044.2; and”.

(3) In paragraph 7—

(a) in sub-paragraph (1), for—

“Except when placed in the circumstances described in paragraph 8, the road markings shown in diagrams 1043 and 1044”

substitute—

“Subject to paragraph 9, the road markings shown in diagrams 1043, 1044 and 1044.1”; and

(b) for sub-paragraph (2), substitute—

“(2) The prohibition in sub-paragraph (1) does not apply to any person where the box junction is at a junction between two or more roads (but not at a gyratory system or roundabout) and the person—

(a) causes a vehicle to enter the box junction for the purpose of turning right; and

(b) stops the vehicle within the box junction for so long as the vehicle is prevented from completing the right turn—

(i) by oncoming vehicles; or

(ii) by vehicles which are stationary whilst waiting to complete a right turn.”.

(4) In paragraph 8, for—

“When the road marking shown in diagram 1043 or 1044 is placed in conjunction with the signs shown in diagrams 615 and 811 on an area of carriageway which is less than 4.5 metres wide at its narrowest point, the road marking”

substitute—

“Subject to paragraph 9, the road marking shown in diagram 1044.2”.

(5) After paragraph 8, insert—

“9. When a vehicle is being used for relevant authority (as defined in section 6 of the Fire (Scotland) Act 2005 ([asp 5](#))) or, in England and Wales, fire and rescue authority, ambulance, bomb or explosive disposal, national blood service or police purposes and the observance of the prohibition in paragraph 7(1) or 8 would be likely to hinder the use of that vehicle for the purpose for which it is being used, then that prohibition shall not apply to the driver of the vehicle.”.

### **New and replacement diagrams**

**34.**—(1) In this regulation, a reference to a diagram is a reference to the diagram, the diagram’s accompanying text and the diagram’s accompanying untitled table or tables.

(2) In Schedule 1 (warning signs)—

(a) for diagrams 530.1 and 530.2, substitute diagrams 530A, 530.1 and 530.2 shown in Part 1 of the schedule to these regulations;

(b) after diagram 532.2, insert diagram 532.2A shown in Part 1 of the schedule to these regulations;



- (c) after diagram 532.3, insert diagram 532.3A shown in Part 1 of the schedule to these regulations; and
  - (d) for diagrams 543.1, 563.1, 572 and 573, substitute respectively diagrams 543.1, 563.1, 572 and 573 shown in Part 1 of the schedule to these regulations.
- (3) In Schedule 2 (regulatory signs)—
- (a) for diagrams 606, 610, 611, 612, 613, 614, 615, 616, 620, 622.1A, 626.2A and 629.1, substitute respectively diagrams 606, 610, 611, 612, 613, 614, 615, 616, 620, 622.1A, 626.2A and 629.1 shown in Part 2 of the schedule to these regulations;
  - (b) after diagram 637.2, insert diagram 637.2A shown in Part 2 of the schedule to these regulations;
  - (c) for diagrams 639.1B, 640.2A, 660, 660.3 and 660.7, substitute respectively diagrams 639.1B, 640.2A, 660, 660.3 and 660.7 shown in Part 2 of the schedule to these regulations;
  - (d) after diagram 660.7, insert diagrams 660.8 and 660.9 shown in Part 2 of the schedule to these regulations;
  - (e) for diagram 661.2A, substitute diagram 661.2A shown in Part 2 of the schedule to these regulations;
  - (f) after diagram 663.1, insert diagrams 663.2 and 663.3 shown in Part 2 of the schedule to these regulations;
  - (g) for diagram 664, substitute diagrams 664 and 664.1 shown in Part 2 of the schedule to these regulations; and
  - (h) for diagrams 665, 666, 671 and 673, substitute respectively diagrams 665, 666, 671 and 673 shown in Part 2 of the schedule to these regulations.
- (4) In Schedule 3 (signs for railway and tramway level crossings), for diagrams 784.1, 786, 787 and 788, substitute respectively diagrams 784.1, 786, 787 and 788 shown in Part 3 of the schedule to these regulations.
- (5) In Schedule 4 (miscellaneous informatory signs)—
- (a) for diagrams 811 and 816.1, substitute respectively diagrams 811 and 816.1 shown in Part 4 of the schedule to these regulations;
  - (b) for diagram 818.3, substitute diagram 818.3 shown in Part 4 of the schedule to these regulations;
  - (c) for diagram 818.4, substitute diagrams 818.4 and 818.5 shown in Part 4 of the schedule to these regulations;
  - (d) after diagram 820, insert diagram 820A shown in Part 4 of the schedule to these regulations;
  - (e) for diagram 829.6, substitute diagram 829.6 shown in Part 4 of the schedule to these regulations;
  - (f) for diagrams 832.1A and 832.2A, substitute respectively diagrams 832.1B and 832.2B shown in Part 4 of the schedule to these regulations; and
  - (g) for diagram 878, substitute diagram 878 shown in Part 4 of the schedule to these regulations.
- (6) In Schedule 5 (signs for bus, tram and pedal cycle facilities)—
- (a) for diagrams 951, 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7, 955, 956 and 957, substitute respectively diagrams 951, 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7, 955, 956 and 957 shown in Part 5 of the schedule to these regulations;

- (b) after diagram 958, insert diagram 958A shown in Part 5 of the schedule to these regulations;
  - (c) for diagram 959.1, substitute diagrams 959A and 959.1 shown in Part 5 of the schedule to these regulations;
  - (d) for diagram 960.1, substitute diagrams 960.1 and 960.2 shown in Part 5 of the schedule to these regulations; and
  - (e) for diagrams 961, 962.2, 964, 966, 974 and 975 substitute respectively diagrams 961, 962.2, 964, 966, 974 and 975 shown in Part 5 of the schedule to these regulations.
- (7) In Schedule 6 (road markings)—
- (a) after diagram 1001.2, insert diagram 1001.2A shown in Part 6 of the schedule to these regulations;
  - (b) for diagrams 1004, 1004.1, 1005, 1005.1, 1008, 1008.1, 1010, 1012.2, 1017, 1018.1, 1019, 1020.1, 1028.3, 1028.4, 1032 and 1033, substitute respectively diagrams 1004, 1004.1, 1005, 1005.1, 1008, 1008.1, 1010, 1012.2, 1017, 1018.1, 1019, 1020.1, 1028.3, 1028.4, 1032 and 1033 shown in Part 6 of the schedule to these regulations;
  - (c) for diagrams 1043 and 1044, substitute diagrams 1043, 1044, 1044.1 and 1044.2 shown in Part 6 of the schedule to these regulations; and
  - (d) for diagrams 1048, 1049, 1050 and 1057, substitute respectively diagrams 1048, 1049, 1050 and 1057 shown in Part 6 of the schedule to these regulations.
- (8) In Schedule 7—
- (a) in Part II (non-primary route directional signs), for diagram 2108, substitute diagram 2108 shown in Part 7 of the schedule to these regulations;
  - (b) in Part IV (signs for services and tourist facilities (other than on motorways)), for diagrams 2310.1, 2313.1, 2313.2, 2313.3, 2313.4, 2313.5 and 2313.6, substitute diagrams 2310.2, 2313.1, 2313.2, 2313.3, 2313.4, 2313.5 and 2313.6 shown in Part 7 of the schedule to these regulations;
  - (c) in Part V (boundary signs (other than on motorways)), for diagram 2402.1, substitute diagram 2402.1 shown in Part 7 of the schedule to these regulations;
  - (d) in Part VI (directional signs to parking places), for diagrams 2502, 2505, 2509.1, 2511 and 2512, substitute respectively diagrams 2502, 2505, 2509.1, 2511.1 and 2512.1 shown in Part 7 of the schedule to these regulations;
  - (e) in Part VII (directional signs for cyclists and pedestrians)—
    - (i) for diagram 2601.1, substitute diagrams 2601.1 and 2601.1A shown in Part 7 of the schedule to these regulations;
    - (ii) for diagram 2602.1, substitute diagrams 2602.1, 2602.1A, 2602.1B and 2602.1C shown in Part 7 of the schedule to these regulations; and
    - (iii) for diagrams 2608 and 2609, substitute diagrams 2608 and 2609 shown in Part 7 of the schedule to these regulations;
  - (f) in Part VIII (temporary and emergency directional signs)—
    - (i) for diagrams 2703, 2704, 2705, 2706 and 2707, substitute respectively diagrams 2703, 2704, 2705, 2706 and 2707 shown in Part 7 of the schedule to these regulations;
    - (ii) for diagram 2711, substitute diagrams 2711 and 2711.1 shown in Part 7 of the schedule to these regulations; and
    - (iii) for diagram 2716, substitute diagram 2716 shown in Part 7 of the schedule to these regulations; and

- (g) in Part X (motorway signs), for diagrams 2901 and 2919.1, substitute respectively diagrams 2901 and 2919.2 shown in Part 7 of the schedule to these regulations.
- (9) In Schedule 8 (light signals for the control of vehicular traffic), for diagrams 3000, 3000.2, 3000.7, 3000.8, 3000.9 and 3000.10, substitute respectively diagrams 3000, 3000.2, 3000.7, 3000.8, 3000.9 and 3000.10 shown in Part 8 of the schedule to these regulations.
- (10) In Schedule 9 (light signals for pedestrians and animal crossings), for diagrams 4002.1, 4003, 4003.1, 4003.2, 4003.3, 4003.4, 4003.5, 4003.6 and 4003.7, substitute diagrams 4002.1, 4003, 4003.1, 4003.1A, 4003.2, 4003.3, 4003.4, 4003.4A, 4003.5, 4003.6, 4003.7 and 4003.7A shown in Part 9 of the schedule to these regulations.
- (11) In Schedule 12—
  - (a) in Part I (miscellaneous warning, informatory and regulatory signs for road works etc)—
    - (i) for diagram 7005, substitute diagram 7005 shown in Part 10 of the schedule to these regulations;
    - (ii) for diagram 7009, substitute diagrams 7009 and 7009.1 shown in Part 10 of the schedule to these regulations;
    - (iii) after diagram 7014, insert diagram 7014.1 shown in Part 10 of the schedule to these regulations; and
    - (iv) for diagrams 7016 and 7019, substitute respectively diagrams 7016 and 7019 shown in Part 10 of the schedule to these regulations;
  - (b) in Part II (road works delineators and barriers), for diagrams 7101.1 and 7102, substitute respectively diagrams 7101.1 and 7102 shown in Part 10 of the schedule to these regulations;
  - (c) in Part III (signs for lane closures and contra-flow working at road works), for diagrams 7202 and 7282, substitute respectively diagrams 7202 and 7282 shown in Part 10 of the schedule to these regulations; and
  - (d) in Part IV (signs for road works entrances and exits), for diagrams 7301 and 7306, substitute respectively diagrams 7301 and 7306 shown in Part 10 of the schedule to these regulations.

## Savings

- 35.**—(1) Subject to paragraph (2), any traffic sign—
- (a) which, immediately before the coming into force of these regulations, was—
    - (i) prescribed by the 2002 regulations; and
    - (ii) placed in compliance with the Traffic Signs General Directions 2002(7); and
  - (b) which ceases to be so prescribed on the coming into force of these regulations,
- is to be treated as prescribed by the 2002 regulations for so long as it continues to comply with those regulations as in force immediately before the coming into force of these regulations.
- (2) Paragraph (1) ceases to have effect—
- (a) in relation to the signs shown in diagrams 832.1A, 832.2A, 2310.1, 2511 and 2512, on the expiry of the period of two years beginning with the date on which these regulations come into force; and
  - (b) in relation to the sign shown in diagram 2919.1, on the expiry of the period of ten years beginning with the date on which these regulations come into force.

**36.**—(1) For the purposes of regulation 35, a sign mentioned in paragraph (2) of this regulation that does not otherwise satisfy the requirement set out in regulation 35(1)(a)(ii) because it had not been placed on or near a road before the coming into force of these regulations is to be deemed to satisfy that requirement if—

- (a) it is so placed within the 12 weeks beginning with the day these regulations come into force; and
- (b) its placing complies with the Traffic Signs General Directions 2002.

(2) Those signs are—

- (a) the signs shown in diagrams 622.1A, 626.2A, 640.2A, 665, 666, 818.4, 2108 and 7282 in the 2002 regulations as in force immediately before the coming into force of these regulations;
- (b) the sign shown in diagram 818.3 in the 2002 regulations as in force immediately before the coming into force of these regulations to the extent that the diagram 629.2A symbol in it may be varied to—

- (i) diagram 622.1A (with the symbol reversed as appropriate) in the 2002 regulations as in force immediately before the coming into force of these regulations; or
- (ii) diagram 626.2A (prohibitory roundel only) in the 2002 regulations as in force immediately before the coming into force of these regulations; and

(c) the signs shown in the diagrams listed in item 31 of Schedule 16 to the 2002 regulations as in force immediately before the coming into force of these regulations, to the extent that they may be varied to display—

- (i) the symbol in diagram 622.1A (with the symbol reversed as appropriate) in the 2002 regulations as in force immediately before the coming into force of these regulations; or
- (ii) the symbol in diagram 626.2A (prohibitory roundel only) in the 2002 regulations as in force immediately before the coming into force of these regulations.

(3) The reference in paragraph (1) to the Traffic Signs General Directions 2002 is to those directions as in force immediately before the coming into force of Part 2 of this instrument.

Signed by authority of the Secretary of State for Transport

20th December 2011


*Norman Baker*  
Parliamentary Under Secretary of State  
Department for Transport

SCHEDULE

New diagrams for insertion into the schedules to the 2002 regulations  
Regulation 34(2)

PART 1

New diagrams for Schedule 1 to the 2002 regulations

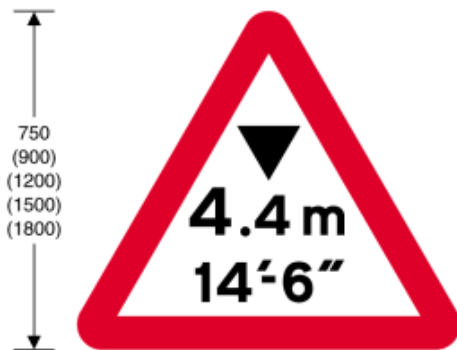

**530A**  
Maximum headroom available at hazard, with height indicated in both metric and imperial units

Item	
1	Regulations: 17
2	Directions: 21
3	Diagrams: 530.1, 530.2, 572, 573
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, item 1




**530.1**  
Reduced headroom over part of road due to overhanging building ahead

Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 530, 530A
4	Permitted variants: Schedule 16, items 3, 6, 11 "building" may be varied to "buildings" or "structure"
5	Illumination requirements: Schedule 17, item 8

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

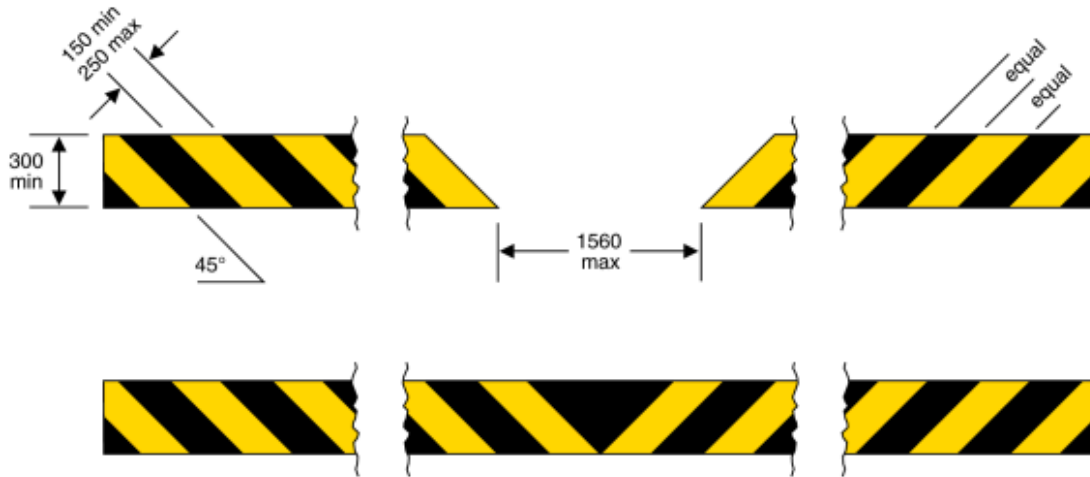


530.2  
Reduced headroom at a hazard  
(Alternative types)

Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 530, 530A, 629.2, 629.2A
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9 Where those parts of the sign coloured yellow are retroreflective they may also be fluorescent

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

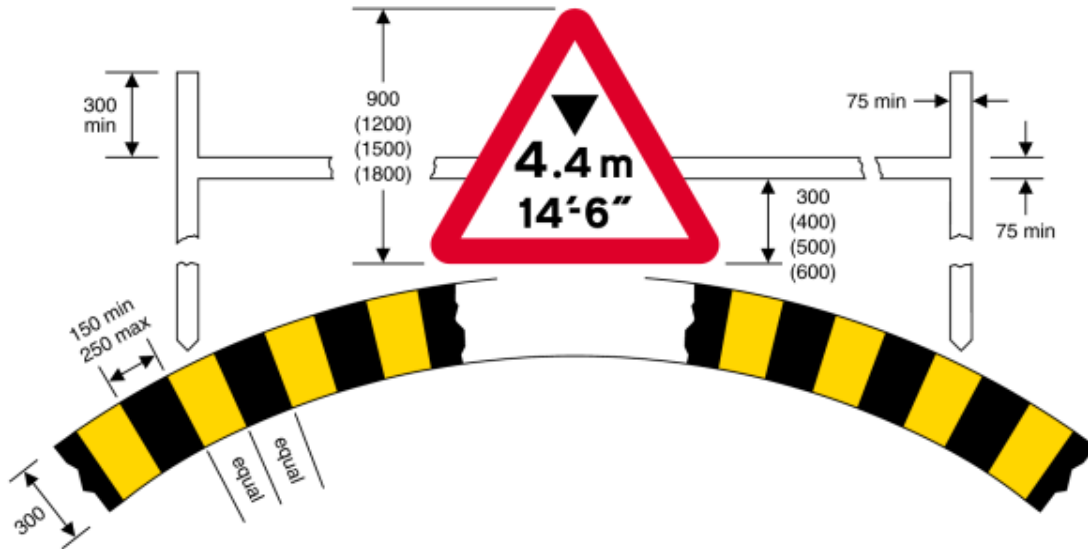


532.2A  
Same as diagram 532.2

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1 Black and yellow markings may be omitted
5	Illumination requirements: Schedule 17, items 1, 9 Same as diagram 530.2

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

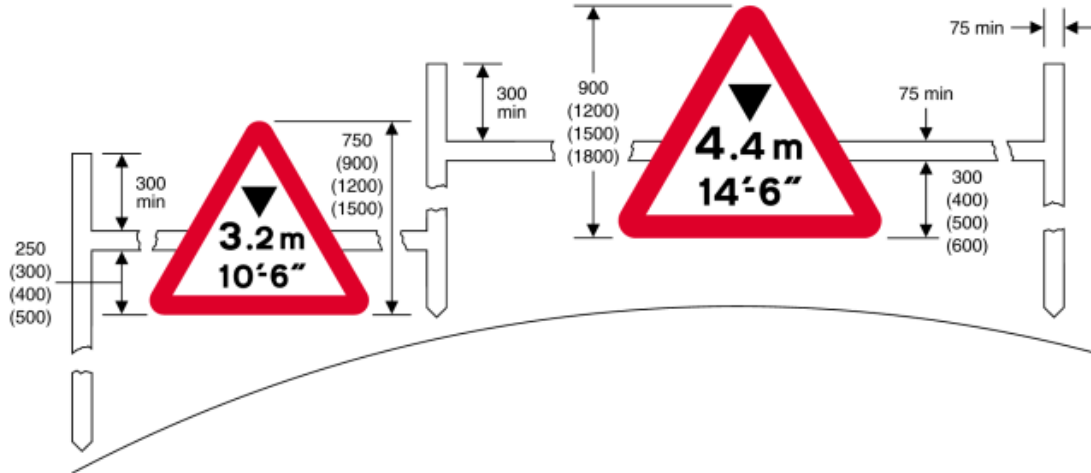

532.3A  
Same as diagram 532.3


Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1 Black and yellow markings shown in diagram 532.2A may be added
5	Illumination requirements: Schedule 17, items 1, 9



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

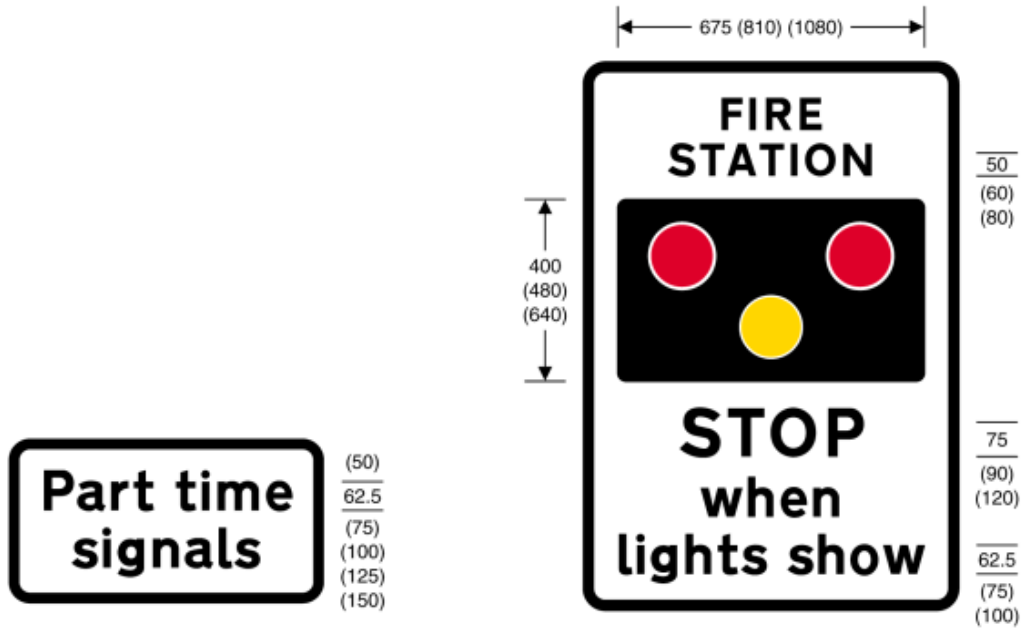

543.1  
Traffic signals which only operate at certain times

563.1  
Warning of light signals as shown in diagram 3014 ahead

Item	
1	Regulations: None
2	Directions: 21, 44A
3	Diagrams: 543, 3000, 3000.7, 3000.8, 3000.9, 3000.10
4	Permitted variants: Schedule 16, items 3, 6, 11 "Part time" may be varied to "Peak hour"
5	Illumination requirements: Schedule 17, items 4, 8

Item	
1	Regulations: None
2	Directions: 20, 21
3	Diagrams: 562
4	Permitted variants: Schedule 16, items 3, 6, 11 "FIRE" may be varied to: 1. "AMBULANCE" 2. "POLICE" 3. "FIRE AND AMBULANCE" 4. "FIRE AND POLICE" 5. "POLICE AND AMBULANCE" 6. "FIRE, POLICE AND AMBULANCE"
5	Illumination requirements: Schedule 17, item 8

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)



(50)  
62.5  
(75)  
(100)  
(125)  
(150)  
(200)

572  
Distance ahead to hazard

Item	
1	Regulations: 17
2	Directions: 21
3	Diagrams: 504.1, 505.1, 506.1, 507.1, 508.1, 509.1, 510, 516, 517, 520, 521, 522, 523.1, 524.1, 528, 529, 529.1, 530, 530A, 531.1, 543, 544, 544.1, 544.2, 550.1, 552, 554, 555, 770, 771, 772, 782, 950, 7001, 7009
4	Permitted variants: Schedule 16, item 6
5	Illumination requirements: Schedule 17, item 8



(50)  
62.5  
(75)  
(100)  
(125)  
(150)  
(200)

573  
Distance and direction to hazard


Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 523.1, 524.1, 528, 529, 529.1, 530, 530A, 531.1, 543, 544, 544.1, 544.2, 550.1, 552, 554, 555, 770, 771, 772, 782, 950, 7001, 7009
4	Permitted variants: Schedule 16, items 6, 9, 13
5	Illumination requirements: Schedule 17, item 8

Regulation 34(3)

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 2


### New diagrams for Schedule 2 to the 2002 regulations

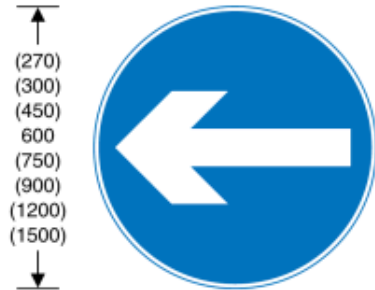

606

Vehicular traffic must proceed in the direction indicated by the arrow


Item	
1	Regulations: 10, 12, 47, 48, 49, 54
2	Directions: 7, 20, 21, 41, 44A
3	Diagrams: 515, 515.1A, 515.2, 607, 608, 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schedule 17, items 1, 6, 7

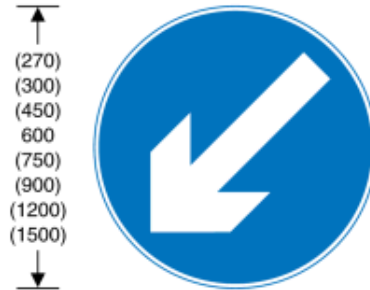

610

Vehicular traffic must comply with the requirements prescribed in regulation 15

Item	
1	Regulations: 10, 12, 14, 15, 26, 27, 54
2	Directions: 21, 41
3	Diagrams: 608
4	Permitted variants: Arrow may point downwards to the right
5	Illumination requirements: Schedule 17, items 1, 7



611


Vehicular traffic may reach the same destination by proceeding either side of the sign

Item	
1	Regulations: 12, 27
2	Directions: 41
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 7

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



612  
No right turn for vehicular traffic

Item	
1	Regulations: 12, 17, 27, 47, 48, 49
2	Directions: 7, 21, 44A
3	Diagrams: 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6

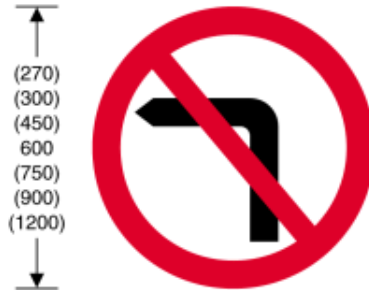


613  
No left turn for vehicular traffic

Item	
1	Regulations: 12, 17, 27, 47, 48, 49
2	Directions: 7, 21, 44A
3	Diagrams: 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6



614  
No U-turns for vehicular traffic

Item	
1	Regulations: 12
2	Directions: 7, 11, 21, 44A
3	Diagrams: 570, 645
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6

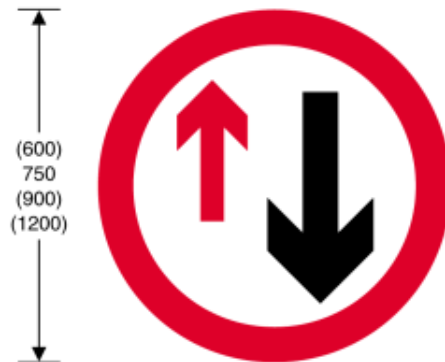


615  
Priority must be given to vehicles from the opposite direction

Item	
1	Regulations: 10
2	Directions: 18, 19, 20, 21
3	Diagrams: 615.1, 645, 811, 1003, 1023, 1044.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

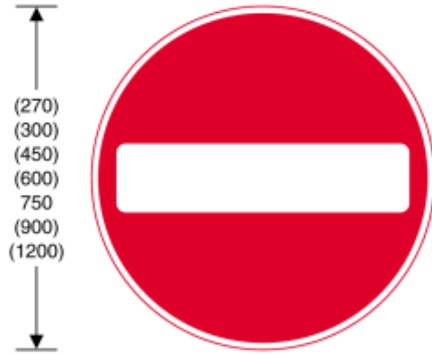

616  
No entry for vehicular traffic

Item	
1	Regulations: 10, 12, 17, 27, 47, 48, 49, 54
2	Directions: 7, 8, 18, 21, 41, 44A
3	Diagrams: 954, 954.2, 1046, 1048.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6, 7

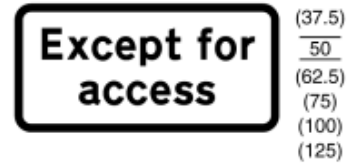


620  
Vehicles requiring access to premises or land adjacent to the road are exempted from the prohibition conveyed by the associated sign

Item	
1	Regulations: 22
2	Directions: 7, 8, 21
3	Diagrams: 619, 619.1, 619.2, 622.1A, 622.5, 622.6, 622.7, 622.8, 629, 629A, 629.1, 952
4	Permitted variants: Schedule 16, item 38 "Except for access" may be omitted when a time period is added. "Except" shall be varied to "except" when preceded by a time period. "for access" may be varied to: <ol style="list-style-type: none"> <li>1. "for loading"</li> <li>2. "for loading by" with the goods vehicle symbol shown in diagram 620.1</li> <li>3. "permit holders" and an identification symbol where appropriate</li> <li>4. The blue badge symbol shown in diagram 661A</li> <li>5. "buses"</li> <li>6. "local buses"</li> <li>7. "taxis"</li> <li>8. "for access to off-street premises"</li> </ol> These variants may be used in any combination with each other and with "for access", except that 1 and 2 shall not be used together or with "for access", 8 shall not be used with "for access", and 5 and 6 shall not be used together. The word "and" shall be inserted before the last variant where more than one is used
5	Illumination requirements: Schedule 17, item 8

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)

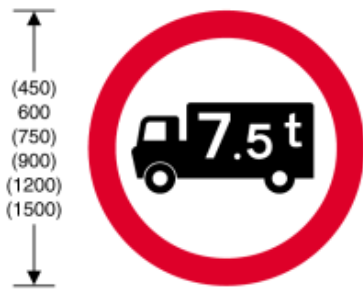

622.1A

Goods vehicles exceeding the maximum gross weight indicated on the goods vehicle symbol prohibited

Item	
1	Regulations: 17
2	Directions: 7, 8, 21
3	Diagrams: 554.3, 620
4	Permitted variants: "7.5t" may be varied to "18t"
5	Illumination requirements: Schedule 17, item 1

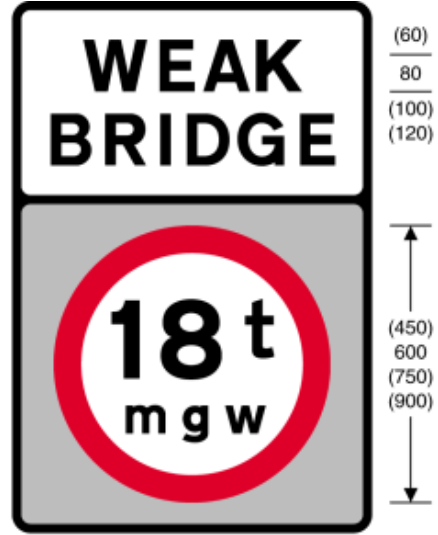

626.2A


Vehicles exceeding the maximum gross weight indicated prohibited from crossing the bridge or other structure

Item	
1	Regulations: 10, 17
2	Directions: 7, 8, 21
3	Diagrams: 627.1
4	Permitted variants: "18t" may be varied to "3t", "7.5t", "10t", "13t", "26t" or "33t". "BRIDGE" may be varied to "ROAD"
5	Illumination requirements: Schedule 17, item 1

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

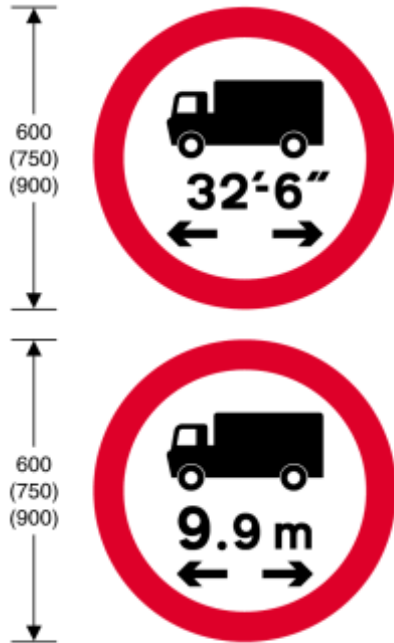

629.1


Vehicles or combinations of vehicles exceeding length indicated prohibited

Item	
1	Regulations: 17
2	Directions: 7, 8, 21
3	Diagrams: 554.3, 620, 954, 954.2
4	Permitted variants: Schedule 16, item 1 Metric sign may be omitted or placed to the right of the imperial sign
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

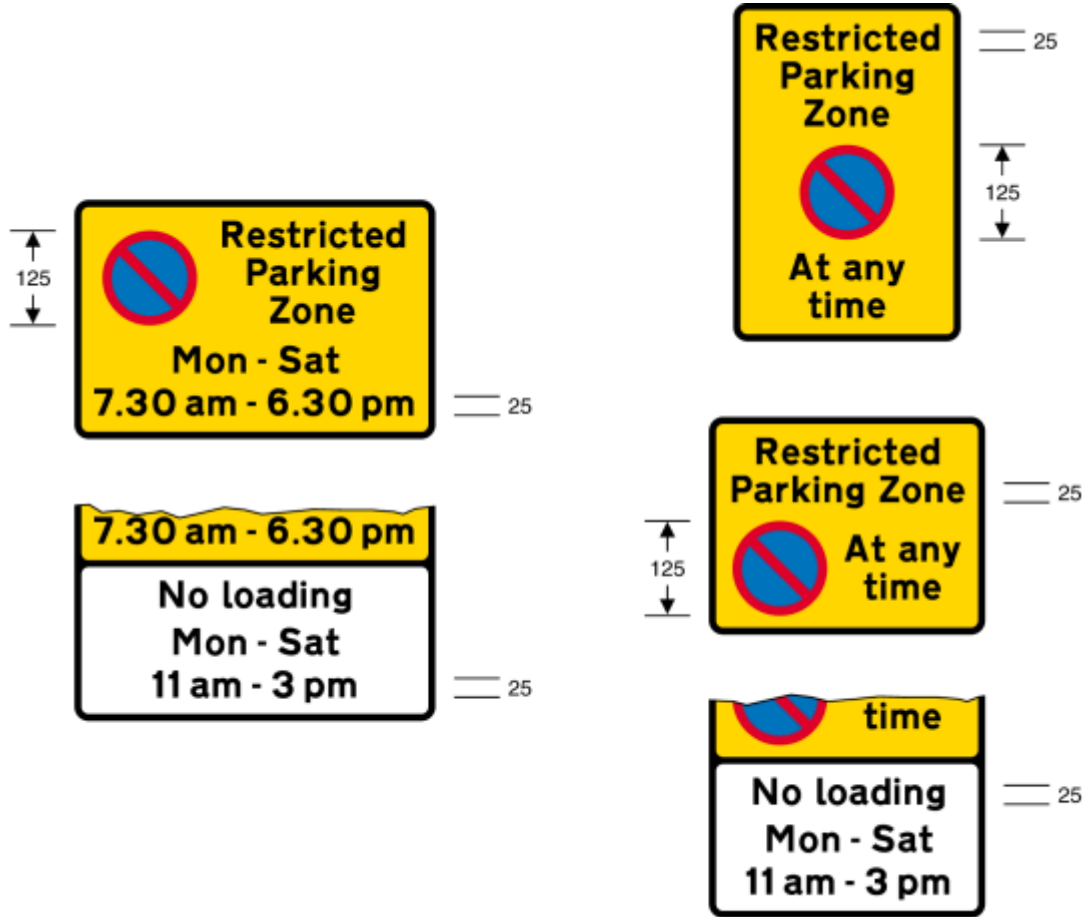

637.2A

Prohibition on waiting (and loading and unloading) in a restricted parking zone (Alternative types)

Item	
1	Regulations: None
2	Directions: 7, 11, 26A
3	Diagrams: 663.2
4	Permitted variants: Schedule 16, item 38 The panels indicating the prohibition of loading and unloading may be varied to diagram 638
5	Illumination requirements: Schedule 17, item 9



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)



639.1B

Waiting prohibited during the periods indicated on the upper panel and restrictions on waiting during the period indicated on the lower panel

Item	
1	Regulations: 24
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 857.1, 1017, 1019, 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 The relative positions of the "no waiting" symbol and other legend in the upper panel may be as shown in diagram 639 or in the upper panel of diagram 640. The upper panel may be varied to diagram 650.2 or 650.3. The lower panel may be varied in a similar manner to diagram 661.1 or varied to diagram 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.9, 661A, 661.2A, 661.3A or 662. The sign shown in diagram 638.1 may be added as a middle panel with the size of the legend as shown for diagram 639.1B
5	Illumination requirements: Schedule 17, item 9

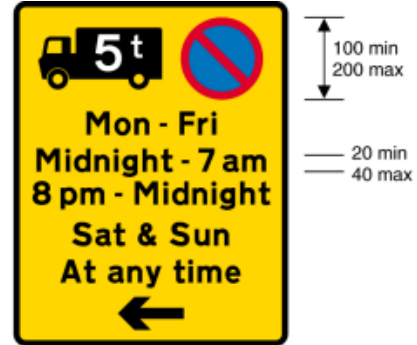

640.2A

Waiting by goods vehicles over maximum gross weight shown prohibited during the periods and in the direction indicated

Item	
1	Regulations: 4, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 14, 38 "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol. When the arrow points to the right the relative positions of the lorry or bus symbol and the no waiting roundel shall be reversed and the lorry or bus symbol (with a window substituted for the door) shall face to the right
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



660  
Parking place reserved for permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 663.3, 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 "Permit holders only" may be varied to: 1. "Card holders only" 2. "Doctor permit holders only" 3. "Large or slow vehicles only" 4. "Business permit holders only" 5. "Resident permit holders only"
5	Illumination requirements: Schedule 17, item 9




660.3  
Parking place reserved for holders of residents' permits

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 663.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 "Resident permit holders only" may be varied to: 1. "Permit holders only" 2. "Doctor permit holders only" 3. "Business permit holders only"
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

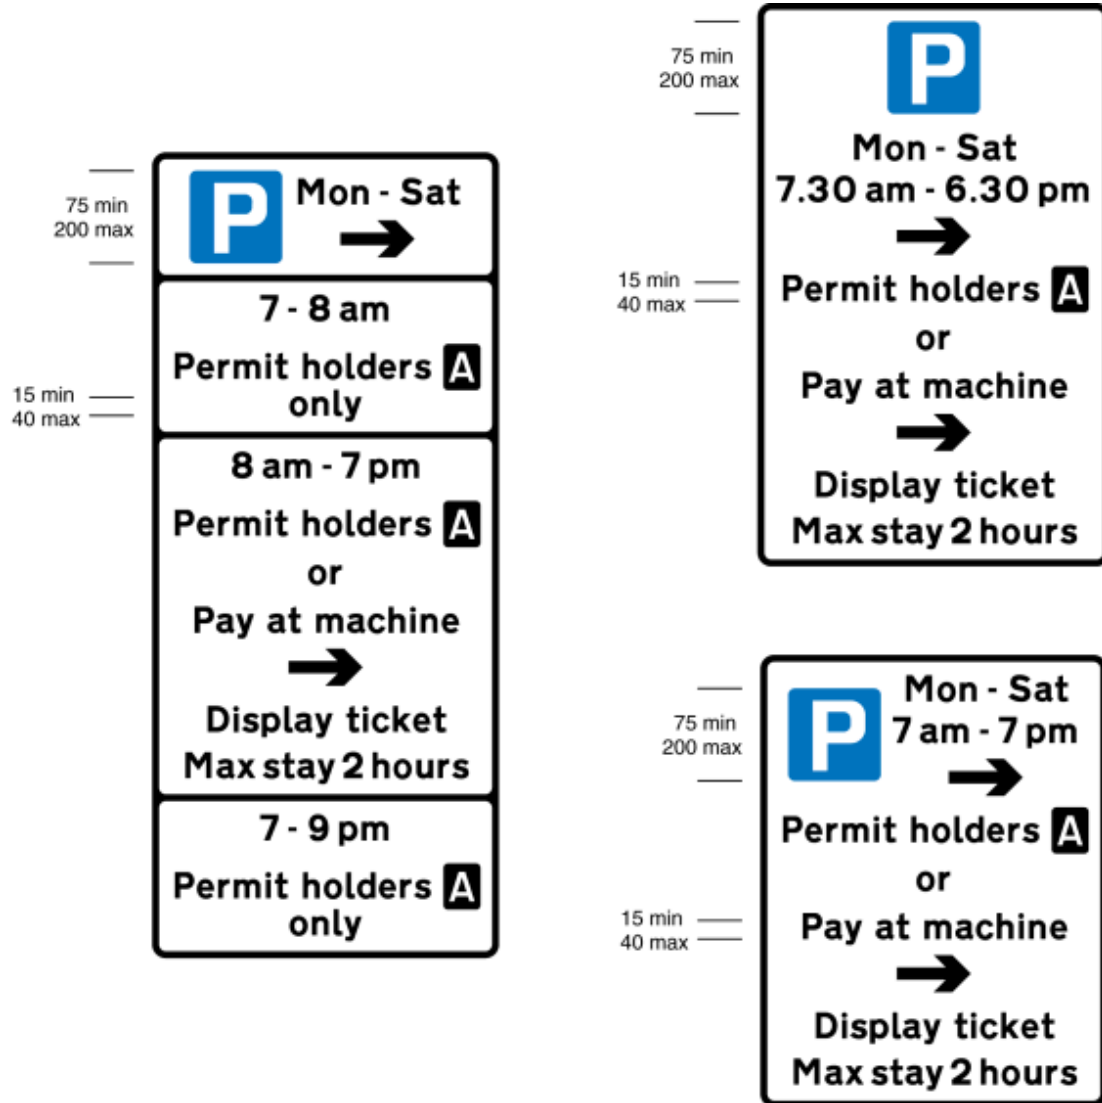

660.7

Parking place for permit holders with paid limited waiting permitted by others at specified times (Alternative types)

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 13, 14, 38, 39 Same as diagram 660.6. The arrow below the legend "Pay at machine" may be replaced by the legend "across road" or "opposite", or, when the arrow at the top of the sign is omitted, replaced by two horizontal arrows pointing in opposite directions
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



660.8

Parking place reserved for car club permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, item 11 The code letters and code numerals identifying the parking place may be varied as appropriate. The size of the code letters and code numerals and associated patch may be varied and may be in any contrasting colours. The name of the traffic authority may be added
5	Illumination requirements: Schedule 17, item 9



660.9

Parking place with facilities for charging electric vehicles reserved for permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, item 11, 38, 39 The legend may be varied to "Electric vehicle recharging point only"
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



661.2A


'Pay and Display' ticket-regulated parking place

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 13, 38, 39 The arrow may be replaced by the legend "across road" or "opposite". A second arrow pointing in the opposite direction may be added
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

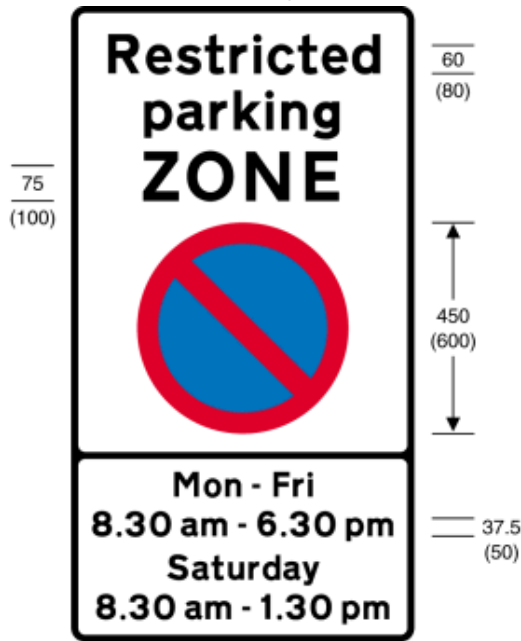

663.2  
Entrance to a restricted parking zone

Item	
1	Regulations: None
2	Directions: 3, 7, 8, 26A
3	Diagrams: 637.2A
4	Permitted variants: Schedule 16, items 38, 39 The legend "No loading" may be added beneath the no waiting roundel. The lower panel shall be omitted where the restrictions apply at all times. The legend "except in signed bays" may be added beneath the time period shown in the lower panel. The legend in the lower panel may be varied to "Except in signed bays"
5	Illumination requirements: Schedule 17, item 4

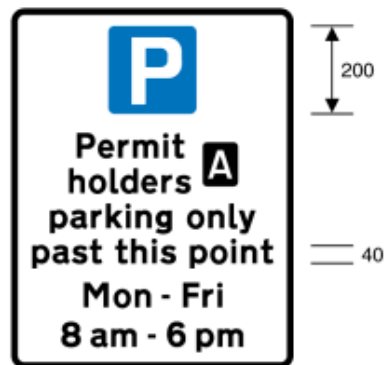


663.3  
Entrance to a road or area where parking is reserved for permit holders during the period indicated and where parking bays have not been provided

Item	
1	Regulations: None
2	Directions: 3, 7, 8, 26A
3	Diagrams: 660, 660.3
4	Permitted variants: Schedule 16, items 38, 39 "Permit holders" may be varied to "Resident permit holders". The permit identifier may be placed to the right of the "P" symbol. The legend "past this point" may be varied to "in" and a street name
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

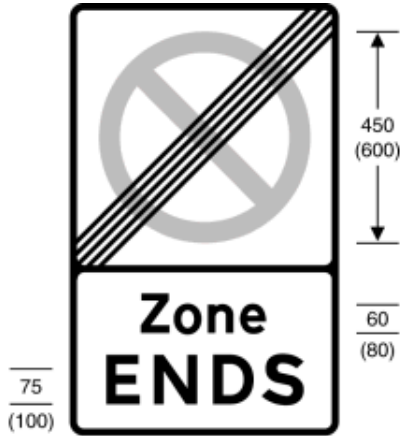

664

End of controlled, voucher or restricted parking zone

Item	
1	Regulations: None
2	Directions: 7, 10, 26A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



664.1


End of permit parking area

Item	
1	Regulations: None
2	Directions: 7, 10, 26A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)

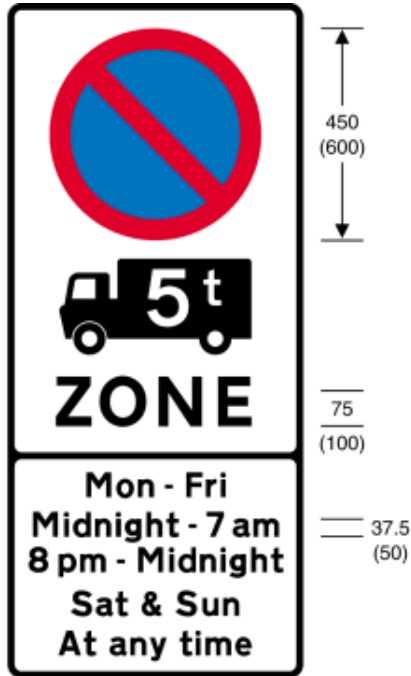

665

Entrance to a controlled parking zone applying to goods vehicles over maximum gross weight shown

Item	
1	Regulations: 4, 24
2	Directions: 7, 8, 26
3	Diagrams: None
4	Permitted variants: Schedule 16, item 38 "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	Illumination requirements: Schedule 17, item 4

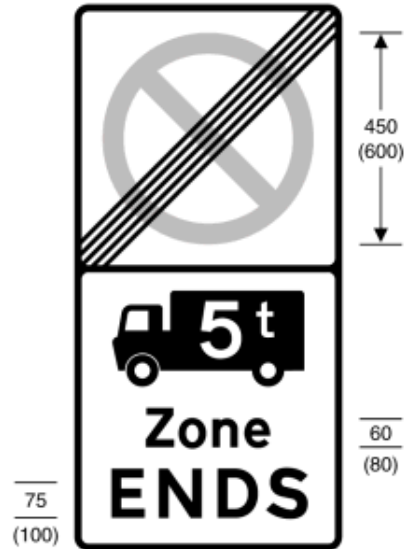

666

End of a controlled parking zone applying to goods vehicles over maximum gross weight shown


Item	
1	Regulations: 24
2	Directions: 7, 10, 26
3	Diagrams: None
4	Permitted variants: "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	Illumination requirements: Schedule 17, item 4



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

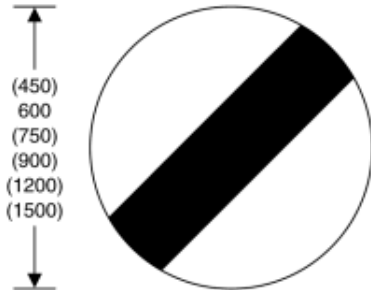

671  
National speed limits apply

Item	
1	Regulations: None
2	Directions: 7, 10, 11, 55A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 10, 11

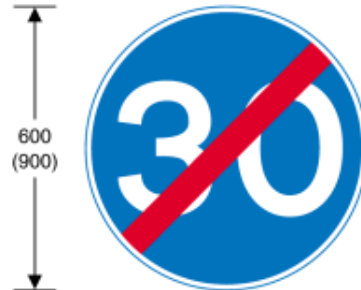

673  
End of a minimum speed limit


Item	
1	Regulations: None
2	Directions: 7, 10
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, items 10, 11

Regulation 34(4)

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

### SCHEDULE —PART 3

#### New diagrams for Schedule 3 to the 2002 regulations

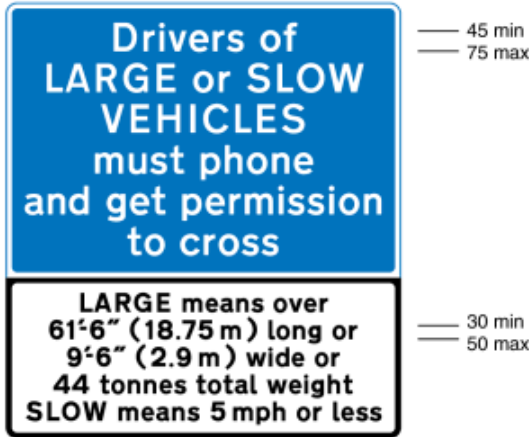

Item	
1	Regulations: 10, 16
2	Directions: None
3	Diagrams: 786, 787, 788
4	Permitted variants: "must phone" may be varied to "must use SOS phone"
5	Illumination requirements: Schedule 17, item 1


784.1

Drivers of large or slow vehicles must stop and telephone before using a railway or tramway level crossing



786

Place where large or slow, or long low vehicles should wait near a railway or tramway level crossing while the driver obtains permission by telephone to cross or confirms he has crossed

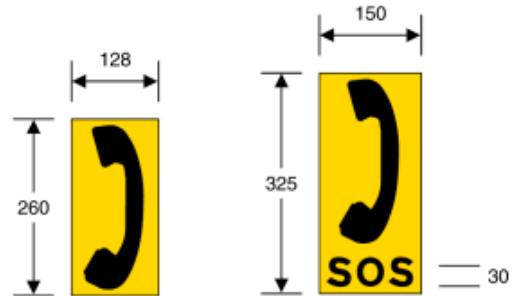

787

Site of emergency telephone or telephone at or near a railway or tramway level crossing (Alternative types)


Item	
1	Regulations: None
2	Directions: 7, 25
3	Diagrams: 782, 783, 784.1, 787, 788, 1028.3
4	Permitted variants: "AND USE PHONE" may be varied to "AND USE SOS PHONE" or "& USE SOS PHONE". "AT CROSSING" may be omitted
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: 783, 784.1, 786, 788
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 3

New diagrams for Schedule 3 to the 2002 regulations (continued)

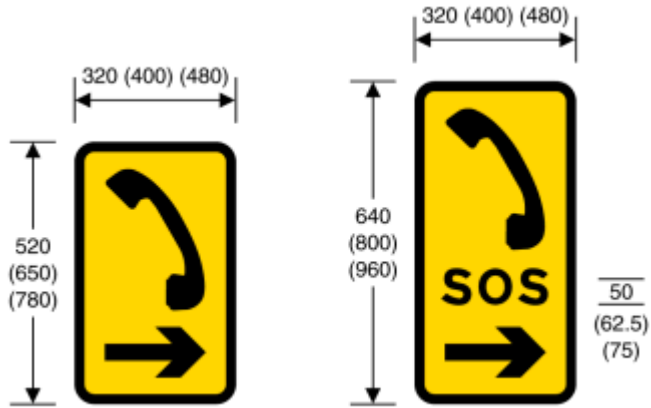

788

Direction to emergency telephone or telephone at or near a railway or tramway level crossing  
(Alternative types)


Item	
1	Regulations: None
2	Directions: None
3	Diagrams: 783, 784.1, 786, 787
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schedule 17, item 4

Regulation 34(5)

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


## SCHEDULE—PART 4

### New diagrams for Schedule 4 to the 2002 regulations

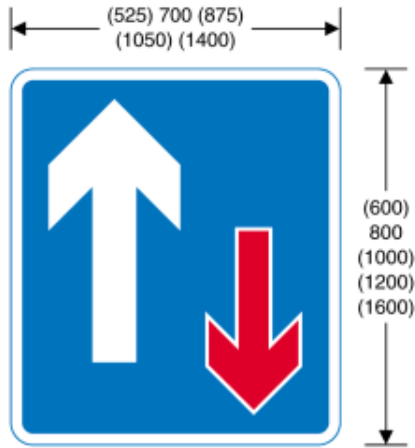

**811**  
Traffic has priority over vehicles  
from the opposite direction

Item	
1	Regulations: None
2	Directions: 18, 19, 20, 21
3	Diagrams: 615, 645, 811.1, 1044.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




**816.1**  
Alternative to the sign shown in diagram 816  
with a street name plate

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The blue panel need not extend to the edge of the name plate. The black border may be omitted
5	Illumination requirements: Schedule 17, item 9


**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

### SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)

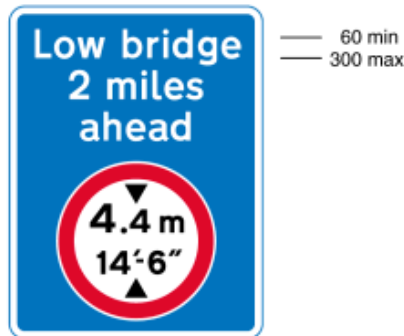

818.3  
Same as diagram 818.2

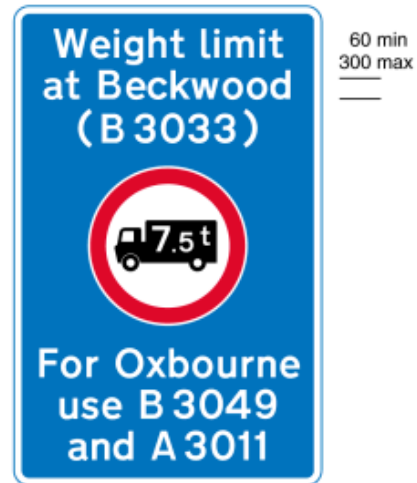

818.4  
Nature and location of a prohibition, restriction or requirement with indication of alternative route

Item	
1	Regulations: 17
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 1, 6, 10 "ahead" may be varied to an arrow pointing horizontally to the left or to the right. "ahead" must be omitted when an arrow is included under item 10 of Schedule 16. "Low bridge" may be varied to "Height limit", "Weight limit", "Weak road", "Weak bridge", "Width limit", "Length limit" or omitted. The distance and any arrow shall be shown below the diagram 629.2A symbol when "Low bridge" is omitted. The diagram 629.2A symbol may be varied to diagram 622.1A (with the lorry symbol reversed as appropriate), 626.2A (prohibitory roundel only), 629, 629A, 629.1 (with the lorry symbol reversed as appropriate) or 629.2 as appropriate to accord with the prohibition
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 19, 20, 28 Same as diagram 622.1A. An arrow pointing horizontally to the left or to the right may be added above the diagram 622.1A symbol. "Weight limit" may be varied to "Weak road", "Weak bridge", "Width limit", "Length limit", "Height limit", "Low bridge" or omitted. The legend "at Beckwood (B 3033)" may be varied to an appropriate description or to a distance. "ahead" may be added after the distance when no arrow is shown. The legend "at Beckwood (B 3033)" may be omitted when an arrow is added. The diagram 622.1A symbol may be varied to diagram 626.2A (prohibitory roundel only), 629, 629A, 629.1 (with the lorry symbol reversed as appropriate), 629.2 or 629.2A as appropriate to accord with the prohibition. The legend below the diagram 622.1A symbol may be varied to "Alternative route follow" and either a symbol shown in Part VII of Schedule 13 or a description of the route, or varied to "Alternative route via" and a description of the route. The legend "For Oxbourne" may be varied to "Alternative route". The legend "B 3049 and A 3011" may be varied to a description of the route. When the sign is placed on a motorway, "use" and the route numbers may be varied to "leave at Junction" and the junction number, or "at Junction" and the junction number may be added after "use" and a route number; "Junction" may be varied to "J"
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)



60 min  
300 max  
—  
—



(50)  
62.5  
(75)  
(100)  
(125)

818.5

Location of low bridge indicated by the sign shown in diagram 530, 530A, 532.2, 532.2A, 532.3 or 532.3A with indication of alternative route

820A

Road unsuitable for heavy goods vehicles

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 1, 6, 19, 20 An arrow pointing horizontally to the left or to the right may be added above the diagram 530A symbol. The legend "south of Maplebeck" may be varied to an appropriate description or to a distance. "ahead" may be added after the distance when no arrow is shown. The legend "south of Maplebeck" may be omitted when an arrow is added. The diagram 530A symbol may be varied to diagram 530. The legend below the diagram 530A symbol may be varied to "For" and a place name and an appropriate description of the route. "via" may be varied to "follow" or "use". "via A 123" may be varied to "follow" and a symbol shown in Part VII of Schedule 13. "A 123" may be varied to a description of the route. When the sign is placed on a motorway, the legend below the diagram 530A symbol may be varied to "For" and a place name and "leave at Junction" and the junction number, or varied to "For" and a place name and "use" and a route number "at Junction" and the junction number; "Junction" may be varied to "J"
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 11, 28 "heavy goods vehicles" may be varied to "HGVs". The legend may be omitted when an arrow is added to the sign
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 4


New diagrams for Schedule 4 to the 2002 regulations (continued)



829.6

Waiting place at a lay-by or observation platform for police or other authorised vehicles only

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "patrol" may be omitted. "Police patrol" may be varied to "Authorised"
5	Illumination requirements: Schedule 17, item 4

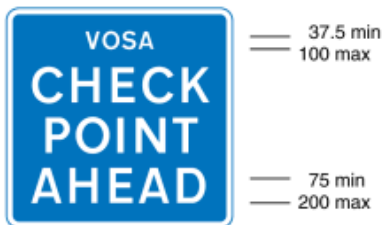

832.1B  
Vehicle check point ahead

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "VOSA" may be varied to "GOODS VEHICLE" or to the name of, or acronym for the name of, the enforcement agency existing at the time of placing of the sign
5	Illumination requirements: Schedule 17, item 4



832.2B  
Vehicle condition check point ahead

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "VOSA" may be varied to the name of, or acronym for the name of, the enforcement agency existing at the time of placing of the sign
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)



878  
Area in which cameras are used  
to enforce traffic regulations  
(Alternative types)

Item	
1	Regulations: 23
2	Directions: 32
3	Diagrams: 879
4	Permitted variants: "Traffic signal" may be varied to "Speed", "Traffic signal and speed", "Traffic enforcement", "Police", "Police enforcement" or "Bus lane". The legend may be varied to "Average speed check"
5	Illumination requirements: Schedule 17, item 4


Regulation 34(6)



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 5

### New diagrams for Schedule 5 to the 2002 regulations

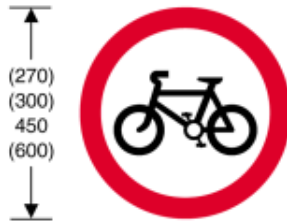


951  
Riding of pedal cycles prohibited

Item	
1	Regulations: None
2	Directions: 7, 8, 41
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 4, 7



954  
Buses excluded from restriction or prohibition conveyed by associated sign

Item	
1	Regulations: 22
2	Directions: 7, 18, 21, 44A
3	Diagrams: 606, 609, 612, 613, 616, 629, 629A, 629.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8

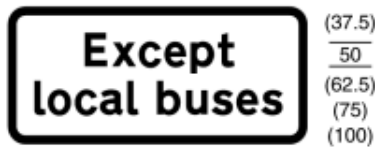

954.2  
As diagram 954 applying to local buses

Item	
1	Regulations: 22
2	Directions: 7, 18, 21, 44A
3	Diagrams: 606, 609, 612, 613, 616, 629, 629A, 629.1, 952
4	Permitted variants: The legend may be on three lines
5	Illumination requirements: Schedule 17, item 8



954.3  
Same as diagram 954 applying to buses and pedal cycles

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 609, 612, 613
4	Permitted variants: The word "local" may be added before "buses". "buses and cycles" may be varied to "buses, taxis and cycles", "buses, taxis & cycles" or "buses and taxis"
5	Illumination requirements: Schedule 17, item 8

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



954.4  
Same as diagram 954 applying to pedal cycles

Item	
1	Regulations: None
2	Directions: 7, 21, 44A
3	Diagrams: 606, 609, 612, 613, 816
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



954.5  
As diagram 954 where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses" may be varied to "cycles"
5	Illumination requirements: Schedule 17, item 6



954.6  
As diagram 954 applying to buses and pedal cycles where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses & cycles" may be varied to "local buses" or "buses & taxis"
5	Illumination requirements: Schedule 17, item 6




954.7  
As diagram 954 applying to buses, taxis and pedal cycles where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses, taxis & cycles" may be varied to "local buses & cycles" or "local buses & taxis"
5	Illumination requirements: Schedule 17, item 6

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 5


### New diagrams for Schedule 5 to the 2002 regulations (continued)



955

Route for use by pedal cycles only


Item	
1	Regulations: None
2	Directions: 7, 8, 18, 21, 41
3	Diagrams: 1003, 1023, 1049, 1057, 2602.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 3, 7



956

Route for use by pedal cycles  
and pedestrians only

Item	
1	Regulations: None
2	Directions: 7, 8, 11, 18, 21, 41
3	Diagrams: 1003, 1023, 1049, 1057, 2602.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 3, 7



957


Route comprising two ways, separated by the marking shown in diagram 1049 or 1049.1 or by physical means, for use by pedal cycles only and by pedestrians only

Item	
1	Regulations: None
2	Directions: 7, 8, 11, 17, 18, 21, 33, 41
3	Diagrams: 1003, 1023, 1049, 1049.1, 1057, 2602.3
4	Permitted variants: The sign may be reversed in a mirror image
5	Illumination requirements: Schedule 17, items 3, 7

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 5


New diagrams for Schedule 5 to the 2002 regulations (continued)

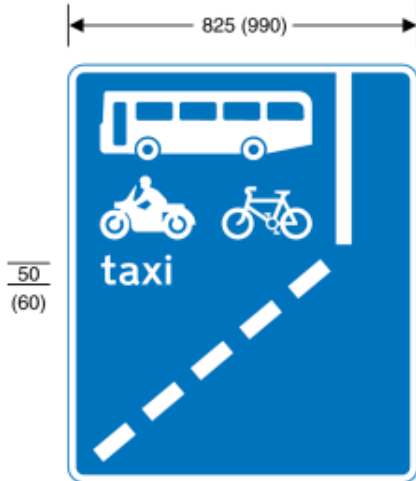

958A

With-flow bus lane which solo motor cycles, pedal cycles and taxis may also use ahead

Item	
1	Regulations: 23, 24
2	Directions: 7, 17, 21
3	Diagrams: 961, 1010
4	Permitted variants: The word "taxi" may be omitted. The bus symbol may be varied to the local bus symbol shown in diagram 958
5	Illumination requirements: Schedule 17, item 4

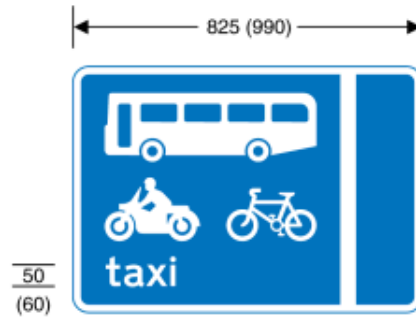

959A


With-flow bus lane which solo motor cycles, pedal cycles and taxis may also use  
Note: Any vehicle may enter the bus lane to stop, load or unload where this is not prohibited

Item	
1	Regulations: 23, 24
2	Directions: 7, 11, 17, 18, 21
3	Diagrams: 961, 1048, 1049
4	Permitted variants: The word "taxi" may be omitted. The bus symbol may be varied to the local bus symbol shown in diagram 959
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


## SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)

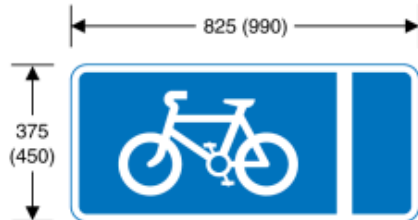


959.1  
With-flow cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18, 21
3	Diagrams: 961, 1049, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

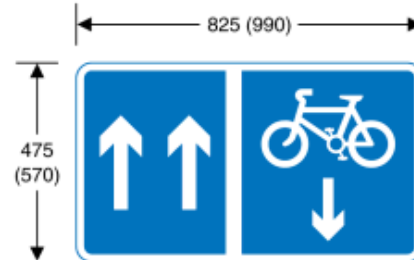


960.1  
One-way traffic with contra-flow cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18
3	Diagrams: 1003, 1023, 1049, 1057
4	Permitted variants: Schedule 16, item 16
5	Illumination requirements: Schedule 17, item 4

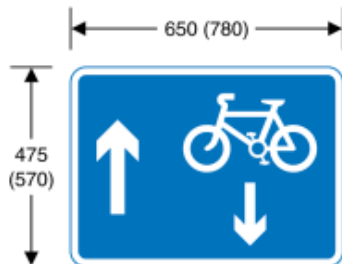

960.2  
One-way traffic with contra-flow pedal cycles

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18
3	Diagrams: 1004, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

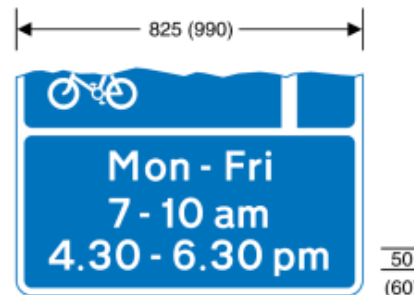

961  
Times of operation of a bus lane or cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 21
3	Diagrams: 958, 958A, 958.1, 959, 959A, 959.1
4	Permitted variants: Schedule 16, item 38
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



962.2

Contra-flow bus lane which pedal cycles may also use on road at junction ahead

Item	
1	Regulations: 23, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 14, 28 Where the arrow is omitted the word "lane" shall be varied to "lanes" and the symbols reversed to face the other way
5	Illumination requirements: Schedule 17, item 4



964

End of bus lane

Item	
1	Regulations: 23
2	Directions: 7, 10
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



966

Pedal cyclists to rejoin main carriageway at the end of, or at a break in, a cycle track or route

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The legend may be on three lines. "REJOIN CARRIAGEWAY" may be varied to "DISMOUNT"
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



974  
Stopping by vehicles other than buses prohibited during the period indicated

Item	
1	Regulations: 22, 29
2	Directions: 24, 25
3	Diagrams: 1025.1, 1025.3, 1025.4
4	Permitted variants: Schedule 16, item 38 "except buses" may be varied to "except local buses"
5	Illumination requirements: Schedule 17, item 4



975  
Place where buses may stand and the stopping of other vehicles is prohibited during the period indicated


Item	
1	Regulations: 22, 29
2	Directions: 24, 25
3	Diagrams: 1025.1, 1025.3, 1025.4
4	Permitted variants: Schedule 16, item 38 Same as diagram 974
5	Illumination requirements: Schedule 17, item 4

Regulation 34(7)

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 6

### New diagrams for Schedule 6 to the 2002 regulations

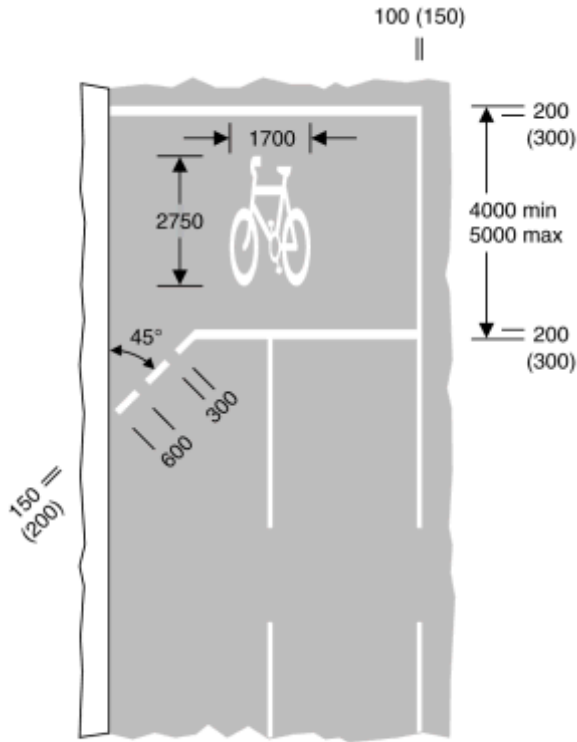

1001.2A

Alternative to the stop line shown in diagram 1001 showing a separate stop line at a junction for pedal cycles proceeding through the cycle entry


Item	
1	Regulations: 12, 31, 43
2	Directions: 18, 47
3	Diagrams: 3000, 3000.7, 3000.8, 3000.9, 3000.10
4	Permitted variants: The number of traffic lanes may be varied. The right hand longitudinal line may be omitted where that part of the carriageway is delineated by a raised kerb. The number of marks in the diagonal line may be varied
5	Illumination requirements: Schedule 17, item 12



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

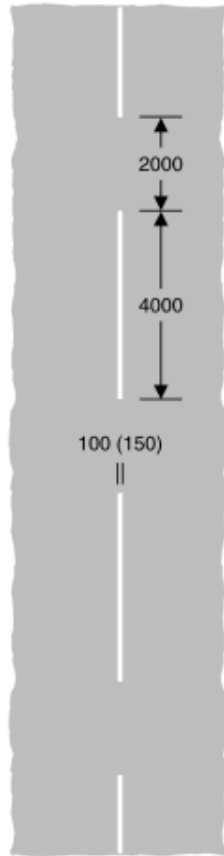

1004

Vehicular traffic should not cross or straddle the line unless it is safe to do so, and when the line is used in conjunction with a sign shown in diagram 960.2 or 967 motor vehicles should not enter a cycle lane unless that lane is clear of pedal cycles

Item	
1	Regulations: 4, 31
2	Directions: 18
3	Diagrams: 960.2, 967, 1001.2, 1057, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

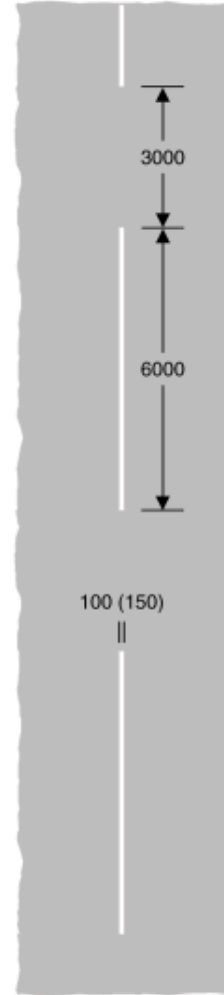

1004.1


Vehicular traffic should not cross or straddle the line unless it is safe to do so, and when the line is used in conjunction with the sign shown in diagram 967 motor vehicles should not enter a cycle lane unless that lane is clear of pedal cycles

Item	
1	Regulations: 4, 31
2	Directions: 18
3	Diagrams: 967, 1001.2, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

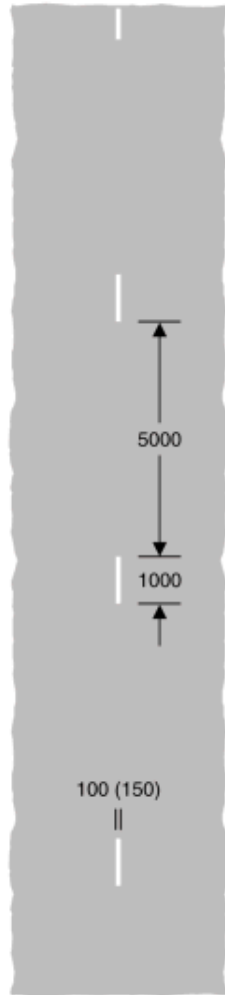

1005

Division of carriageway into traffic lanes on the part of the carriageway where vehicles normally proceed in the same direction other than at places where the marking shown in diagram 1004 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

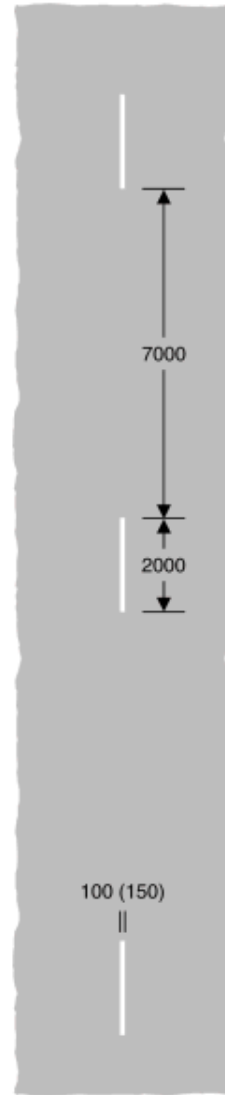

1005.1


As diagram 1005 other than at places where the marking shown in diagram 1004.1 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

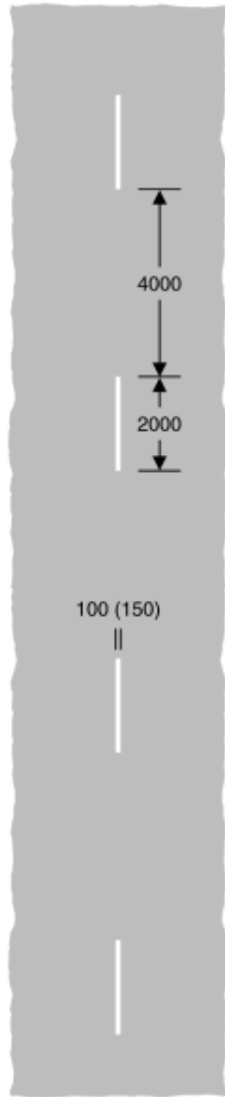

1008

Division between opposing flows of traffic on a carriageway other than at places where the marking shown in diagram 1004 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

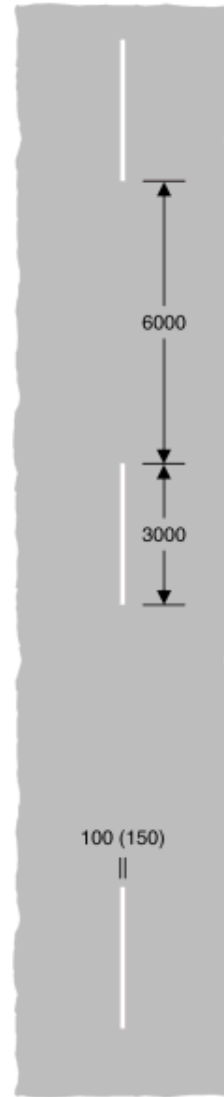

1008.1


As diagram 1008 other than at places where the marking shown in diagram 1004.1 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

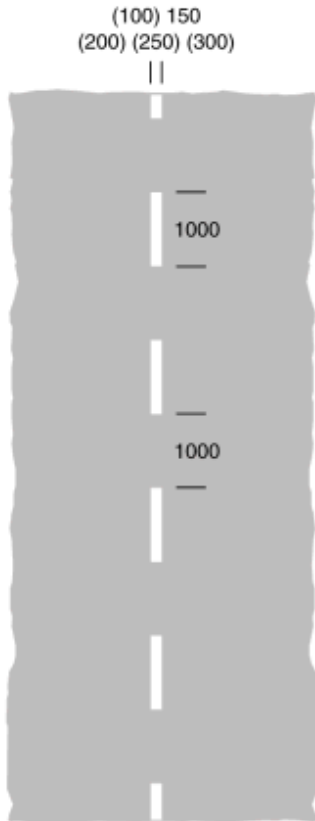

1010


- (a) Edge of the carriageway at a lay-by or at an exit from a private drive onto a public road; or
- (b) where laid diagonally across part of the carriageway, the start of a traffic lane, the boundary of which is indicated by diagram 1049; or
- (c) when used in conjunction with diagrams 1014 and 1024.1, the most suitable path to be taken by high vehicles under a low bridge or to avoid an overhanging structure; or
- (d) when laid alongside rails used by tramcars, the edge of the part of the carriageway used by the tramcars; or
- (e) the division between the main carriageway and a traffic lane which leaves the main carriageway at a junction ahead; or
- (f) the boundary between the main carriageway and either a diverging or merging traffic lane at a road junction; or
- (g) the boundary between an emergency refuge area and an actively managed hard shoulder

Item	
1	Regulations: 4, 31
2	Directions: 17, 18
3	Diagrams: 508.1, 509.1, 958, 958A, 1014, 1024.1, 1049
4	Permitted variants: An audible or tactile warning in the form of a raised rib may be incorporated in the manner shown in diagram 1012.2 into the white parts of the marking when it is used to delineate the boundary between an emergency refuge area and an actively managed hard shoulder. The ribs on an individual white mark shall be 250 millimetres apart
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

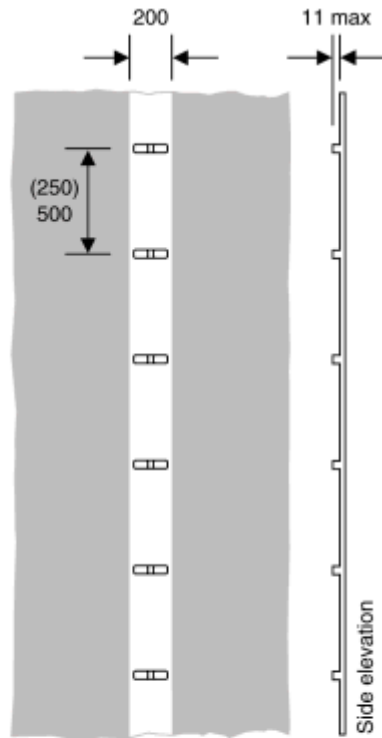

1012.2

- (a) Edge of the carriageway of a motorway other than at a junction with a slip road; or
- (b) the back edge of an actively managed hard shoulder;


and, in both cases, incorporating an audible and tactile warning

Item	
1	Regulations: 11, 31, 32
2	Directions: 14
3	Diagrams: None
4	Permitted variants: The notch may be omitted from the raised rib. The width of the line shall be 150 millimetres when it is used to delineate the back edge of an actively managed hard shoulder
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

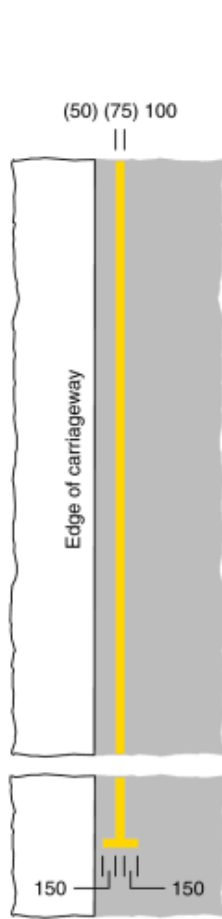

1017

Waiting of vehicles on a side of a length of road prohibited for a time less than that specified in caption (a) to diagram 1018.1

Item	
1	Regulations: 4
2	Directions: 3, 7, 18, 22, 24, 25
3	Diagrams: 637.2, 639, 639.1B, 640, 650.3, 663, 663.1, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

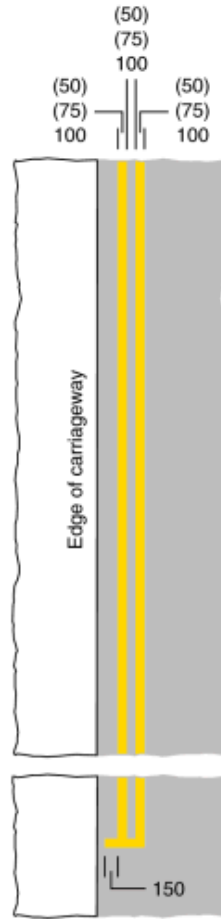

1018.1

(a) Waiting of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months; or


(b) Stopping of vehicles in a lay-by prohibited except in emergency

Item	
1	Regulations: 4
2	Directions: 3, 7, 18, 22, 24, 25
3	Diagrams: 637.2, 637.3, 640, 642.3, 650.3, 663, 663.1, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


## SCHEDULE—PART 6

### New diagrams for Schedule 6 to the 2002 regulations (continued)

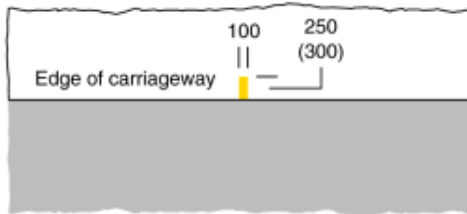

**1019**  
Loading and unloading of vehicles on a side of a length of road prohibited for a time less than that specified in the caption to diagram 1020.1

Item	
1	Regulations: 4
2	Directions: 3, 7, 23, 24, 25
3	Diagrams: 637.2, 638.1, 639.1B, 640, 663, 663.1
4	Permitted variants: The marking may be continued down the vertical face of a kerb at the edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

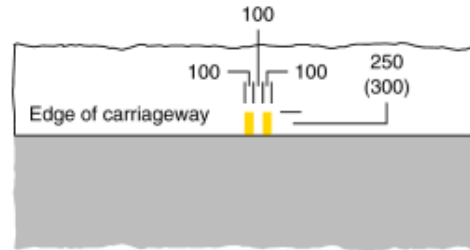


**1020.1**  
Loading and unloading of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months

Item	
1	Regulations: 4
2	Directions: 3, 7, 23, 24, 25
3	Diagrams: 637.2, 638, 640, 663, 663.1
4	Permitted variants: Same as diagram 1019
5	Illumination requirements: Schedule 17, item 12

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

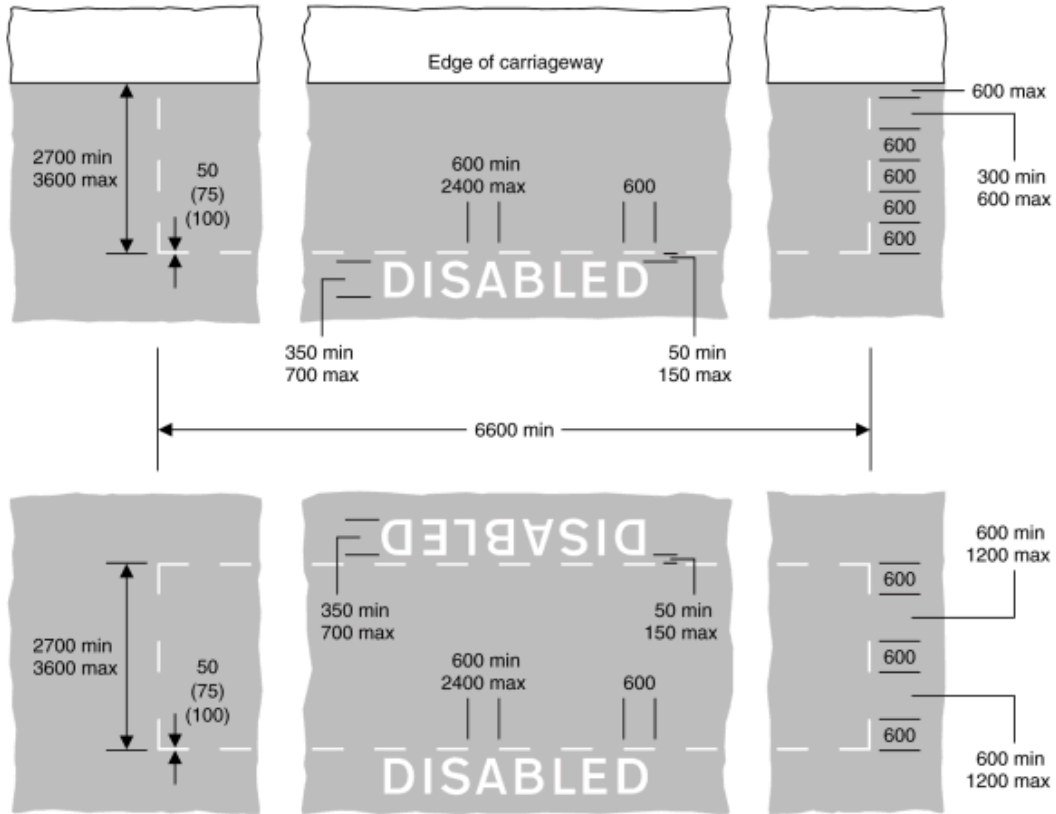

1028.3

Alternative types of parking bays reserved for disabled badge holders either at the edge or in the centre of the carriageway (Longitudinal marking)


Item	
1	Regulations: 12, 22
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.4, 660.8, 660.9, 661A, 661.1, 786, 801 (when used with 804.1), 969
4	<p>Permitted variants: The number of times the word "DISABLED" is shown may be varied according to the length of the marking. "DISABLED" may be omitted or varied to:</p> <ol style="list-style-type: none"> <li>1. "BUSES"</li> <li>2. "LARGE OR SLOW VEHICLES ONLY"</li> <li>3. "LOADING ONLY"</li> <li>4. "CAR CLUB ONLY"</li> <li>5. "CAR CLUB"</li> <li>6. "ELECTRIC VEHICLES ONLY"</li> <li>7. "ELECTRIC VEHICLES"</li> <li>8. "ELECTRIC VEHS ONLY"</li> <li>9. "ELECTRIC VEHS"</li> </ol> <p>The minimum width of a bay reserved for disabled badge holders at the edge of the carriageway shall be 1800 millimetres in a case where, on account of the nature of the traffic using the road, the overall width of the carriageway is insufficient to accommodate a wider bay. In such a case, or where the width of the bay is 2700 millimetres, the transverse marking shall be the same as the transverse marking in the edge of carriageway version of diagram 1028.4. The transverse line may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb</p>
5	Illumination requirements: Schedule 17, item 12



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

### SCHEDULE—PART 6

#### New diagrams for Schedule 6 to the 2002 regulations (continued)

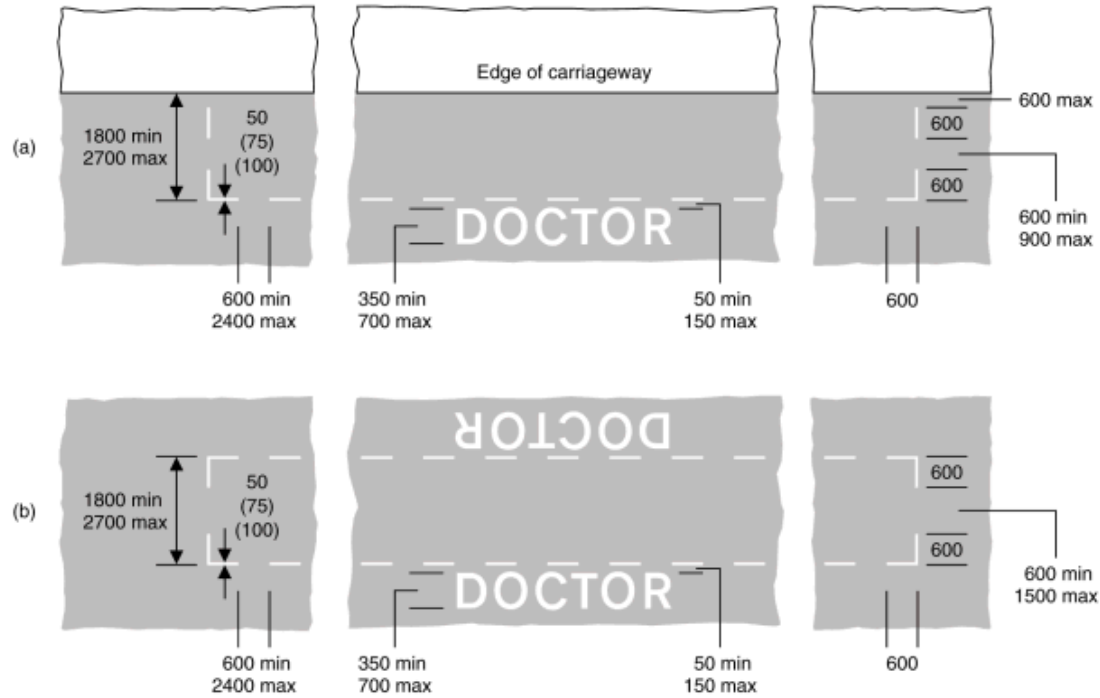

1028.4

#### Alternative types of parking bays reserved for doctor permit holders

- (a) at the edge of the carriageway and situated wholly on either the carriageway or the footway; or
- (b) in the centre of the carriageway or partly on the carriageway and partly on the footway


(Longitudinal marking)

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.5, 660.6, 660.7, 660.8, 660.9, 661.1, 661.2A, 661.3A, 662, 663.1, 667, 667.1, 668, 668.1, 801
4	<p>Permitted variants: The number of times the word "DOCTOR" is shown may be varied according to the length of the marking. "DOCTOR" may be omitted or varied to:</p> <ol style="list-style-type: none"> <li>1. "SOLO MOTORCYCLES ONLY"</li> <li>2. "SOLO M/CYCLES ONLY"</li> <li>3. "SOLO M/CS ONLY"</li> <li>4. "PERMIT HOLDERS ONLY"</li> <li>5. "CAR CLUB ONLY"</li> <li>6. "CAR CLUB"</li> <li>7. "ELECTRIC VEHICLES ONLY"</li> <li>8. "ELECTRIC VEHICLES"</li> <li>9. "ELECTRIC VEHS ONLY"</li> <li>10. "ELECTRIC VEHS"</li> </ol> <p>The transverse line may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb. When the marking is placed wholly or partly on the footway any legend shall be placed only on the carriageway side of the bay</p>
5	Illumination requirements: Schedule 17, item 12

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

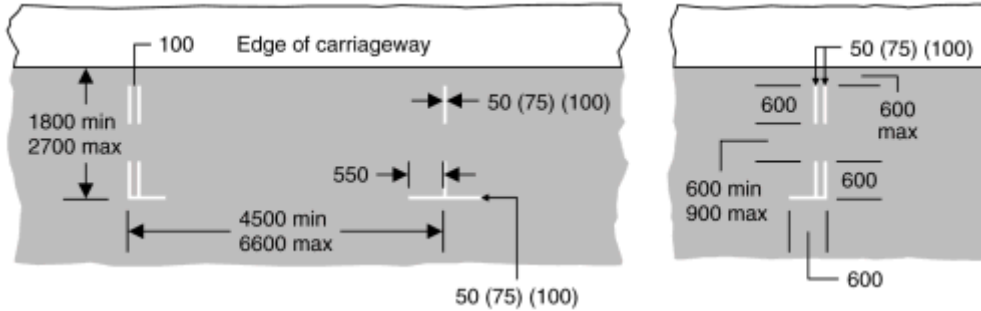

1032


Parking bay marked with individual parking spaces  
(Longitudinal marking)

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.8, 660.9, 661A, 661.1, 661.2A, 661.3A, 662, 663.1, 801
4	Permitted variants: The number of individual parking spaces may be extended as necessary. The double transverse lines are only to be used at the end of a block of parking spaces and may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb. Two adjacent parking spaces may be combined into a single space by omitting the transverse line between them and giving a maximum length of space of 13200 millimetres. The words "DOCTOR", "DISABLED", "LOADING ONLY", "CAR CLUB ONLY", "CAR CLUB", "ELECTRIC VEHICLES", "ELECTRIC VEHS ONLY" or "ELECTRIC VEHS" may be added in the manner shown in diagram 1028.4. The minimum length of a parking space reserved for disabled badge holders shall be 6600 millimetres. The width of such a space shall be 2700 millimetres but this may be reduced to a width not less than 1800 millimetres in a case where, on account of the nature of the traffic using the road, the overall width of the carriageway is insufficient to accommodate a wider bay
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

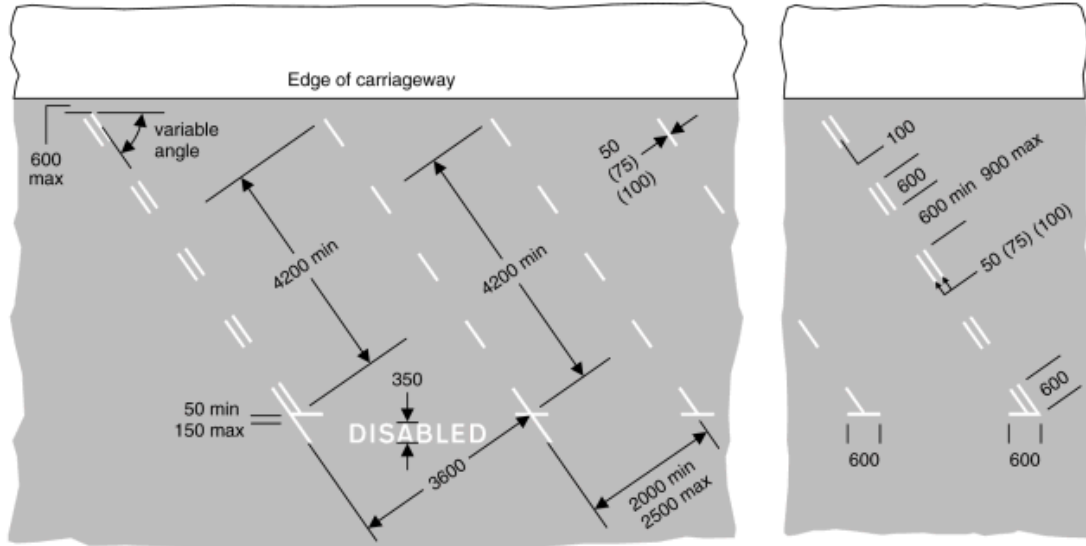

1033


Echelon parking spaces subject to such conditions,  
if any, as may be in force

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.8, 660.9, 661A, 661.1, 661.2A, 661.3A, 662, 663.1, 801
4	Permitted variants: "DISABLED" and the associated bay may be omitted. Additional "DISABLED" bays may be provided. The words "DOCTOR" or "CAR CLUB" may be added. The marking may be omitted along that part of a bay which is delineated by a raised kerb
5	Illumination requirements: Schedule 17, item 12

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

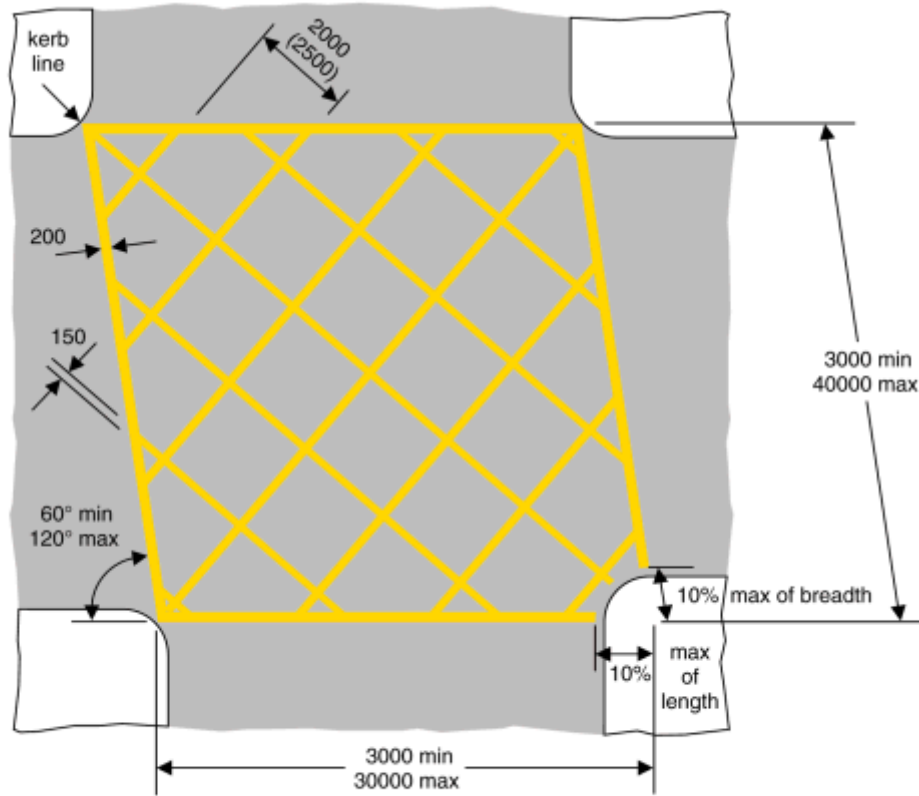

1043


Marking conveying the requirements prescribed by regulation 29(2) and Part II of Schedule 19 and which extends across the full width of the carriageway

Item	
1	Regulations: 10, 12, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: Any corner may be cut away as shown. The cut-away corner may be completed in the same manner as the other corners. Parts of the marking shall be omitted where tram rails cross the marking. Parts of the marking may be omitted to indicate the edge of the path taken by a tramcar and, where parts of the marking are so omitted, the remaining parts shall be bounded by a continuous yellow line
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

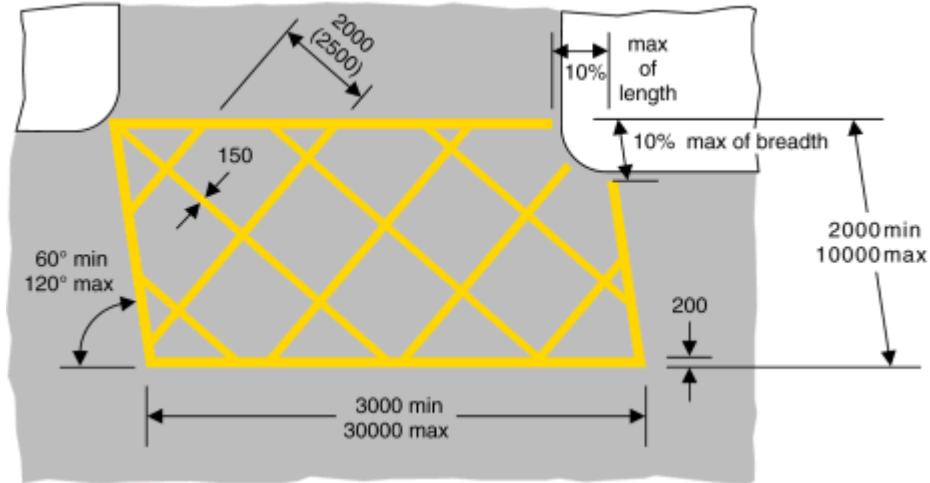

1044


As diagram 1043 where the marking extends across part of the width of the carriageway

Item	
1	Regulations: 10, 12, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: Same as diagram 1043
5	Illumination requirements: Schedule 17, item 12

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

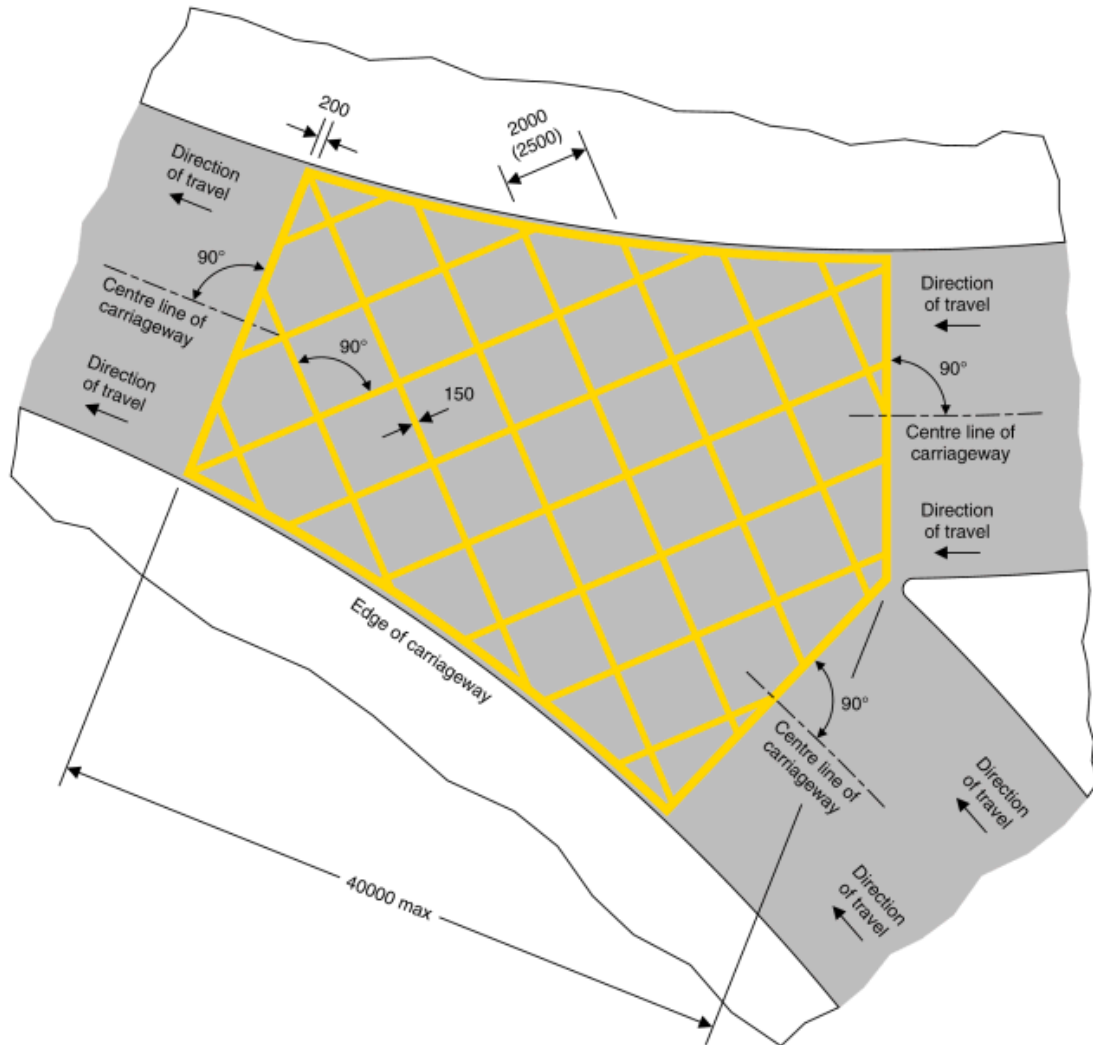

1044.1


Marking conveying the requirements prescribed by regulation 29(2) and Part II of Schedule 19 when placed on an area of carriageway at a gyratory system or roundabout

Item	
1	Regulations: 10, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: The width and shape of the marking may be varied, but only in a manner such that the longitudinal boundaries of the marking are adjacent to each edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

### SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

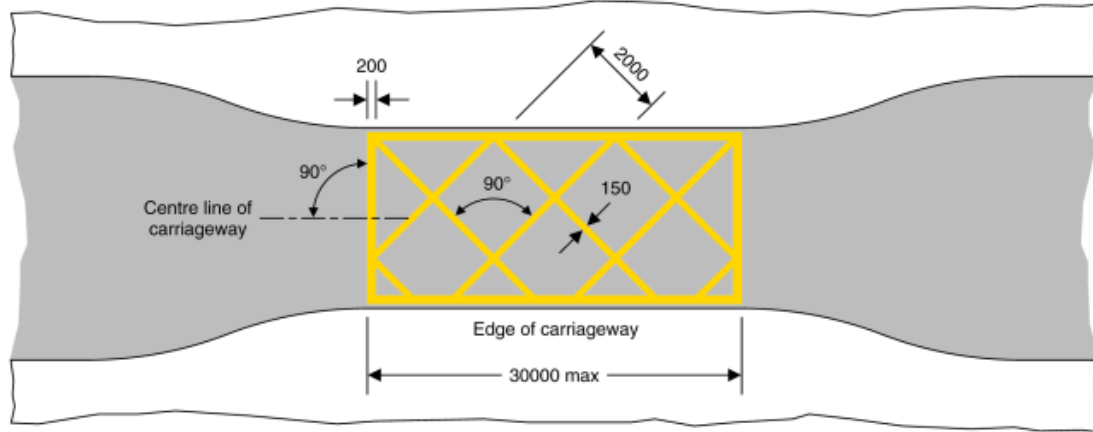

1044.2


Marking used in conjunction with signs shown in diagrams 615 and 811 conveying the requirements of regulation 29(2) and Part II of Schedule 19

Item	
1	Regulations: 10, 29
2	Directions: 18, 35
3	Diagrams: 615, 811
4	Permitted variants: The width and shape of the marking may be varied, but only in a manner such that the longitudinal boundaries of the marking are adjacent to each edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

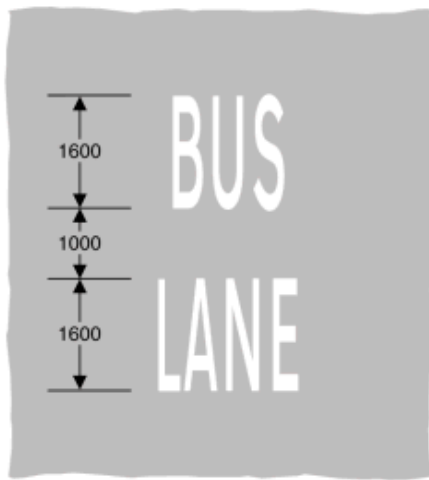

1048

With-flow lane reserved for buses and other vehicles as indicated on the sign shown in diagram 959 or 959A, or a contra-flow lane reserved for buses

Item	
1	Regulations: 22, 23
2	Directions: 7, 17, 18
3	Diagrams: 959, 959A, 960, 1049
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1049

Boundary of a bus lane, cycle lane, other designated lane, cycle track or route used by pedal cycles and pedestrians only. Where used in conjunction with the sign shown in diagram 957, the division of a route into that part reserved for pedal cycles and that part reserved for pedestrians


Item	
1	Regulations: 4, 31
2	Directions: 7, 17, 18, 33
3	Diagrams: 955, 956, 957, 959, 959A, 959.1, 960, 960.1, 1010, 1014, 1048, 1048.1, 1050, 1057, 1058
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

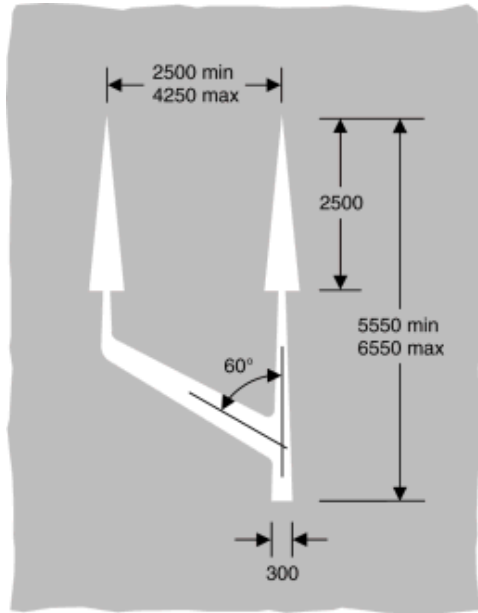

1050

Direction of possible traffic movements at the end of a bus lane or other designated lane, or where there is an intermediate discontinuation of the lane on the approach to a junction

Item	
1	Regulations: 12
2	Directions: 7, 18
3	Diagrams: 1049
4	Permitted variants: The left hand arrow head may indicate a left turn in the manner shown in diagram 1036.1
5	Illumination requirements: Schedule 17, item 12

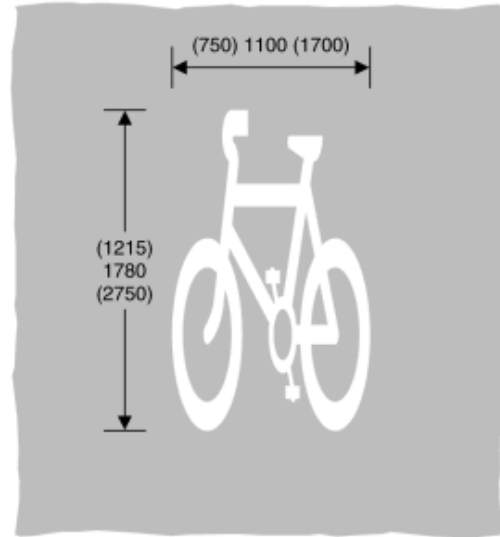

1057

Cycle lane, track or route


Item	
1	Regulations: None
2	Directions: 17, 18
3	Diagrams: 955, 956, 957, 959.1, 960.1, 960.2, 965, 967, 1001.2, 1003, 1004, 1004.1, 1023, 1049, 1049.1, 1058, 1059, 2601.2, 2602.2
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 12

Regulation 34(8)

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

## SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations

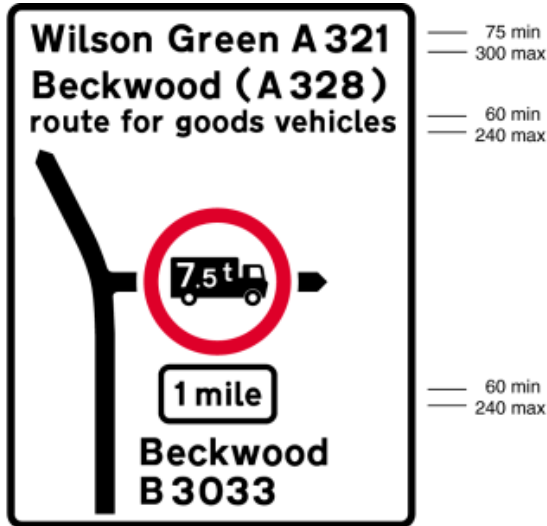

Item	
1	Regulations: 17
2	Directions: 7, 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 30, 31, 32, 34, 35, 36, 37
5	Illumination requirements: Schedule 17, item 4

2108

Junction ahead of two non-primary routes, on one of which there is a weight restriction, and the other is the alternative route to avoid the weight restriction



2310.2

Distance ahead to a named motorway service area located on a road that is not a motorway at which fuel, parking, toilets and refreshments are available, and a picnic area, overnight accommodation, LPG fuel and a Tourist Information Point or Centre may be available, 24 hours a day throughout the year  
(Sign on primary or non-primary route)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 The LPG fuel, picnic area, "i" and bed symbols may be omitted as appropriate. "Puddleworth" shall be varied to another geographical name as appropriate
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2313.1

Distance ahead to services at which fuel, parking, restaurant facilities and toilets are available for all vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day



2313.2

Direction to services at which fuel, parking, light refreshments and toilets are available for all vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The cup symbol (denoting light refreshments) shown in diagram 2313.2 may be substituted for the spoon and fork symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.2 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The spoon and fork symbol (denoting restaurant) shown in diagram 2313.1 may be substituted for the cup symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*


SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2313.3

Distance ahead to services not open for 24 hours but where fuel, parking, light refreshments and toilets are available for all vehicles at least between 8 am and 8 pm on every day except Christmas Day, Boxing Day and New Year's Day

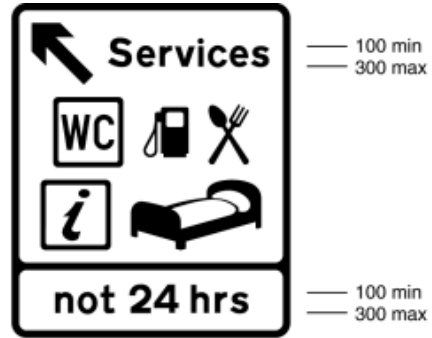

2313.4

Direction to services not open for 24 hours but where fuel, parking, restaurant facilities and toilets are available for all vehicles at least between 8 am and 8 pm on every day except Christmas Day, Boxing Day and New Year's Day


Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The spoon and fork symbol (denoting restaurant) shown in diagram 2313.4 may be substituted for the cup symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.4 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The cup symbol (denoting light refreshments) shown in diagram 2313.3 may be substituted for the spoon and fork symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7


New diagrams for Schedule 7 to the 2002 regulations (continued)

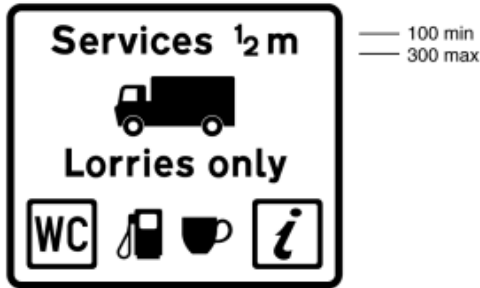

2313.5

Distance ahead to services at which fuel, parking, light refreshments and toilets are available for goods vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The lorry symbol shall be varied to the lorry symbol with the red bar shown in diagram 2313.6 and the words "Lorries only" omitted where facilities are provided for vehicles other than goods vehicles. The spoon and fork symbol (denoting restaurant) shown in diagram 2313.6 may be substituted for the cup symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.6 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided. The phrase "not 24 hrs" shall be added in a panel at the bottom of the sign as shown in diagram 2313.3 where the services are not open for 24 hours but where the facilities are available between at least 8 am and 8 pm. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

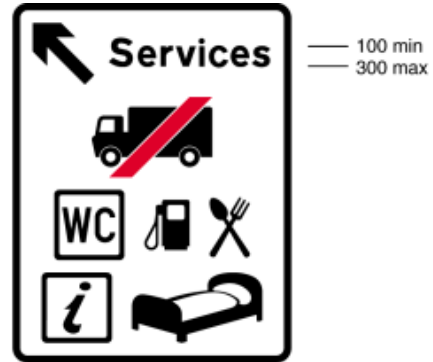

2313.6

Direction to services at which fuel, parking, restaurant facilities and toilets are available for vehicles other than goods vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The lorry symbol shown in diagram 2313.5 and the words "Lorries only" shall be substituted for the lorry symbol with the red bar where the facilities provided are primarily for heavy goods vehicles. The cup symbol (denoting light refreshments) shown in diagram 2313.5 may be substituted for the spoon and fork symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided. The phrase "not 24 hrs" shall be added in a panel at the bottom of the sign as shown in diagram 2313.4 where the services are not open for 24 hours but where the facilities are available between at least 8 am and 8 pm. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



CAPITAL LETTER HEIGHT  
70 min



CAPITAL LETTER HEIGHT  
35 min

CAPITAL LETTER HEIGHT  
70 min



60 min  
250 max

2402.1  
Name of a town or village commencing immediately ahead (Alternative types)

2502  
Distance to a commercial vehicles parking place ahead with public toilets and telephones

Item	
1	Regulations: None
2	Directions: 13, 42
3	Diagrams: None
4	Permitted variants: Schedule 16, item 19 "Welcome to" may be omitted or varied to a similar phrase. The legend "City of" or "Welcome to the City of" may precede the place name. "Please drive carefully" may be omitted or varied to "Thank you for driving carefully" or another road safety message of not more than five words. When "Welcome to" is omitted, a phrase denoting an item of local geographical or historical interest may be added above the place name and may be in the style of "Market town of" or other appropriate description of not more than five words. The relative sizes of lettering on different parts of the sign may be varied provided the place name remains the most prominent feature
5	Illumination requirements: Schedule 17, item 9

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 10, 11, 28 The lorry or "WC" or telephone symbol may be omitted. The recycling centre symbol shown in diagram 2139 may be added. The "i" symbol shown in diagram 2313.1 may be added where the parking place includes a general information point not associated with tourist attractions
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2505  
Directions to different types of parking place  
from a junction ahead

Item	
1	Regulations: 13, 17, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	<p>Permitted variants: Schedule 16, items 3, 6, 12, 16, 28, 31, 34, 38 The permitted variants shown below apply to each parking place indicated on the sign.</p> <p>The name or location of the parking place may be added. One of the following legends may be used or the legend may be omitted:</p> <ol style="list-style-type: none"> <li>1. "Free"</li> <li>2. "Shoppers"</li> <li>3. "Commuters"</li> <li>4. "Long stay"</li> <li>5. "Short stay"</li> <li>6. "Pay and display"</li> <li>7. "Multi-storey"</li> </ol> <p>No more than two of the following symbols may be shown:</p> <ol style="list-style-type: none"> <li>1. Pedal cycle shown in diagram 968</li> <li>2. Bus shown in diagram 969</li> <li>3. Goods vehicle shown in diagram 804.1</li> <li>4. Car shown in diagram 804.2</li> <li>5. Caravan drawn by a car shown in diagram 804.3</li> <li>6. Motor cycle shown in diagram 804.4</li> <li>7. Tourist information "I" shown in diagram 2313.1</li> </ol> <p>The total number of spaces in the parking place may be indicated in white figures in the bottom right hand corner of the "P" symbol as shown in diagram 2506.</p> <p>The "Park Mark" symbol may be added to the "P" symbol in the manner shown in diagrams 2511.1 and 2512.1 to indicate a secured car park approved by the police under the "Park Mark" safer parking scheme.</p> <p>One of the following variable legends may be displayed in red or green characters in the manner shown in diagram 2509.1:</p> <ol style="list-style-type: none"> <li>1. "FULL"</li> <li>2. "CLOSED"</li> <li>3. "SPACES"</li> </ol> <p>One of the following variable legends may be displayed in white, off-white or yellow characters on a black background:</p> <ol style="list-style-type: none"> <li>1. "FULL"</li> <li>2. "CLOSED"</li> <li>3. "SPACES"</li> <li>4. The number of available spaces at any one time</li> </ol> <p>The arrow symbols may be omitted when "FULL" or "CLOSED" is displayed</p>
5	Illumination requirements: Schedule 17, item 4 79

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2509.1

Directions to several alternative parking places with an indication of the availability of parking spaces at each one (Variable message sign)

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 16, 19, 28, 31, 34, 38 Same as diagram 2505 except in respect of the indication of the total number of spaces in the "P" symbols shown in the top panel. The right hand "P" symbol in the top panel may be omitted. The top panel or both "P" symbols in the top panel may be omitted and the "P" symbol added to each of the other panels. "Long stay" or "Short stay" may be added to or substituted for either "Town centre" in the top panel or the geographical names in the other panels. The legends "SPACES" and "FULL" are interchangeable and may be varied to "CLOSED" or to the number of available spaces at any one time. The variable legend shall be displayed in the colours described in diagram 2505. The arrow may be omitted when all parking places indicated in that direction are shown as either "CLOSED" or "FULL"
5	Illumination requirements: Schedule 17, item 4



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2511.1

Direction to a secured car park approved by the police under the "Park Mark" safer parking scheme

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 28, 31, 34, 38 Same as diagram 2505. The "P" symbol and the "Park Mark" symbol may be arranged in the manner shown in diagram 2512.1
5	Illumination requirements: Schedule 17, item 4



2512.1

Same as diagram 2511.1

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28, 31, 34, 38 Same as diagram 2505. The "P" symbol and the "Park Mark" symbol may be arranged in the manner shown in diagram 2511.1
5	Illumination requirements: Schedule 17, item 4



2601.1


Directions of numbered routes for pedal cycles forming part of a national cycle route network at a junction ahead

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 16, 19, 20, 28, 34 The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. When the cycle symbol faces to the right, any route number shall be placed to the left of the cycle symbol. The cycle symbol and route number may be placed alongside the destination in the manner shown in diagram 2602.1. The pedestrian symbol shown in diagram 2605 (reversed as appropriate) may be added to the left of the route number when the cycle symbol faces to the right and to the right of the route number when the cycle symbol faces to the left. Where one direction only is indicated by the sign, the arrow when pointing horizontally to the left or to the right may be placed at the bottom of the sign in the manner shown in diagram 2610.1
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)

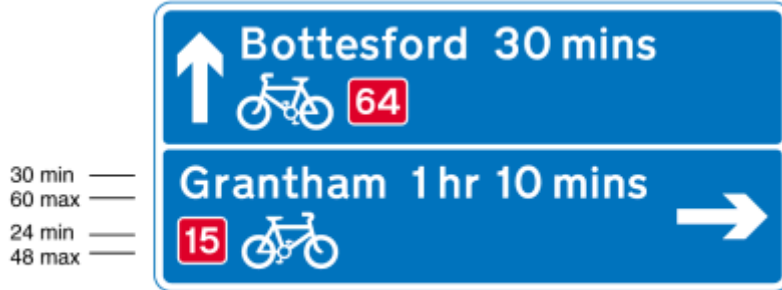

2601.1A


Directions of numbered routes for pedal cycles forming part of a national cycle route network with an indication of journey times from a junction ahead

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 12, 16, 19, 20, 34 Journey times may be varied. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. The cycle symbol and route number may be placed alongside the destination in the manner shown in diagram 2602.1A. Where one direction only is indicated by the sign, the arrow when pointing horizontally to the left or to the right may be placed at the bottom of the sign in the manner shown in diagram 2610.1
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)

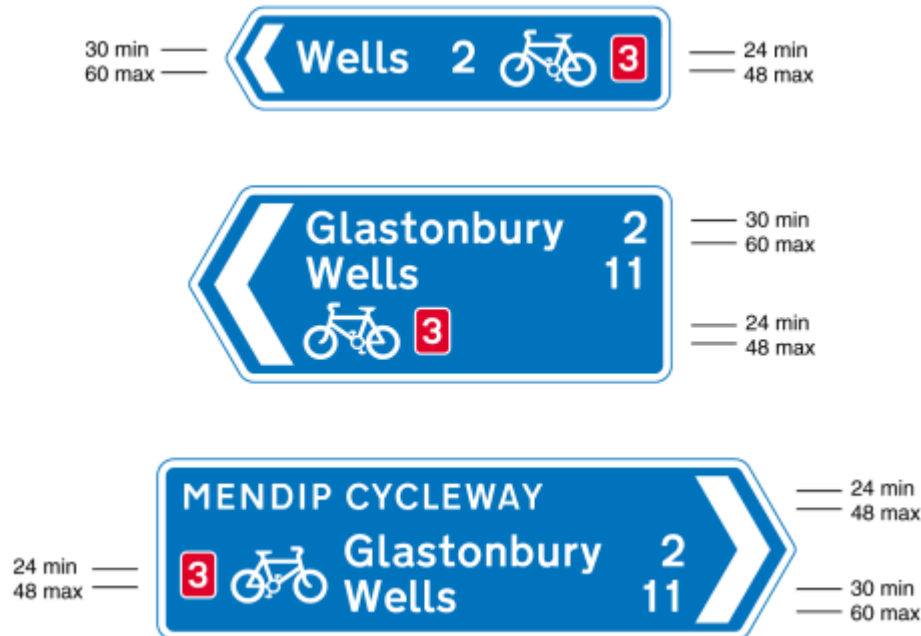

2602.1


Direction and distance to destinations shown along a numbered route for pedal cycles forming part of a national cycle route network  
(Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 15, 19, 20, 34 The name of the cycle route may be added, varied or omitted as appropriate, and may be on more than one line. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. Where the cycle symbol is shown below a place name and the sign points to the right, the cycle symbol shall face to the right and any route number shall be placed to the left of the cycle symbol. The pedestrian symbol shown in diagram 2605 (reversed as appropriate) may be added to the left of the route number when the cycle symbol faces to the right and to the right of the route number when the cycle symbol faces to the left
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)

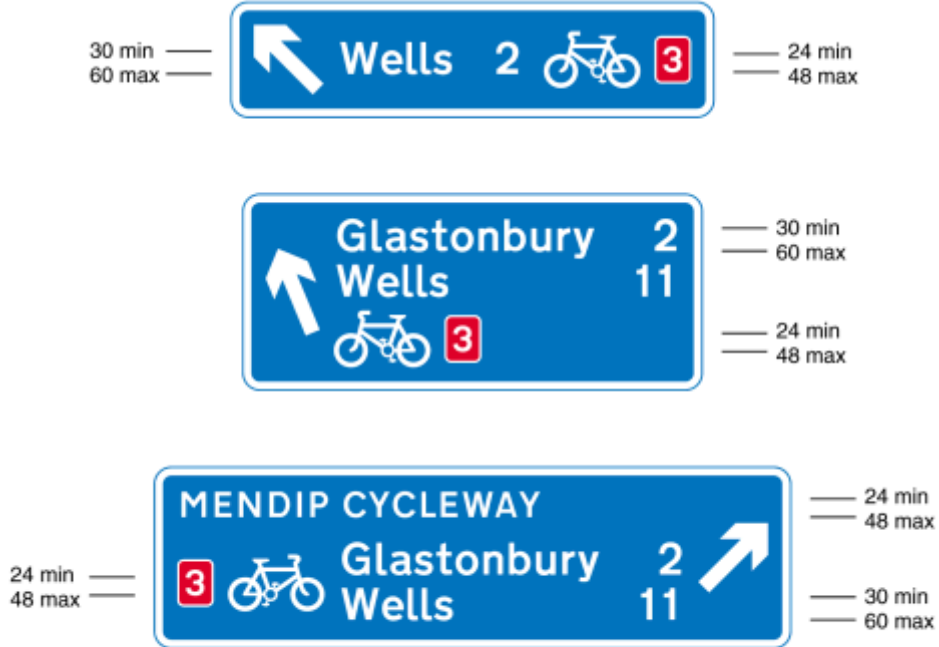

2602.1A  
Same as diagram 2602.1  
(Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 19, 20, 34 Same as diagram 2602.1
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1B

Direction and journey time to destinations shown along a numbered route for pedal cycles forming part of a national cycle route network (Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 15, 19, 20, 34 Journey times may be varied. The name of the cycle route may be added, varied or omitted as appropriate, and may be on more than one line. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. Where the cycle symbol is shown below a place name and the sign points to the right, the cycle symbol shall face to the right and any route number shall be placed to the left of the cycle symbol
5	Illumination requirements: Schedule 17, item 9

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1C  
Same as diagram 2602.1B  
(Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 19, 20, 34 Same as diagram 2602.1B
5	Illumination requirements: Schedule 17, item 9

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2608

Direction of route to a tourist attraction for pedestrians

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 19, 28, 29, 33 The cycle symbol shown in diagram 2602.1 may be added to or substituted for the pedestrian symbol. A cycle route number patch may be added to the cycle symbol in the manner shown in diagram 2602.1. The wheelchair symbol shown in diagram 814.2 may be added where the sign indicates facilities and the appropriate route for disabled people
5	Illumination requirements: Schedule 17, item 9



2609

Direction of route for pedestrians to a parking place associated with a tourist attraction

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28, 29 The name or location of the parking place may be added. The wheelchair symbol shown in diagram 814.2 may be added where the sign indicates the appropriate route for disabled people
5	Illumination requirements: Schedule 17, item 9

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2703  
Direction of temporary diversion route  
from junction ahead

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 20 Any symbol shown in Part VII of Schedule 13 may be substituted for "Diverted traffic". The U-turn arrow shown in diagram 2111.1 may be substituted for the horizontal arrow and shall always be on the right hand side of the sign
5	Illumination requirements: Schedule 17, item 4



2704  
Direction of temporary diversion route

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 15, 20 Any symbol shown in Part VII of Schedule 13 may be substituted for "Diverted traffic"
5	Illumination requirements: Schedule 17, item 4



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2705  
Junction ahead leading to temporary diversion routes to the destinations shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 12, 16, 19, 20, 30, 31, 32, 34
5	Illumination requirements: Schedule 17, item 4



2706  
Roundabout ahead leading to a temporary diversion route to the destination shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 19, 20, 30, 31, 32, 34 "Diverted traffic" or any symbol shown in Part VII of Schedule 13 may be substituted for the place name destination
5	Illumination requirements: Schedule 17, item 4

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2707

Direction of temporary diversion route to destination shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 20, 30, 31, 32, 34
5	Illumination requirements: Schedule 17, item 4



2711

Direction to emergency exit for pedestrians from a tunnel

2711.1

Direction and distance to emergency exit for pedestrians from a tunnel

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 28 The arrow may be placed below the symbols
5	Illumination requirements: Schedule 17, item 2

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 13, 28 The arrow may be placed below the symbols
5	Illumination requirements: Schedule 17, item 2

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2716

Junction ahead leading to a temporary diversion route, the direction along which is indicated by a symbol shown in Part VII of Schedule 13

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	<p>Permitted variants:                      Schedule 16, items 12, 14, 19, 20                      "M1 North" may be varied to the name of a road, to a route number and a place name, or to a route number and "Junction" and the junction number, or to a description of a route.                      "closed" may be varied to:</p> <ol style="list-style-type: none"> <li>"closed to" and a type of vehicle or road user</li> <li>"closed at" and a place name or "Junction" and the junction number</li> <li>"closed after" and a place name or "Junction" and the junction number</li> </ol> <p>The upper part of the sign may be omitted.                      "Alternative route" may be varied to "To rejoin", or to "To rejoin" and a route number. "to" and a destination may be added after "Alternative route". The diversion symbol may be varied to any of those shown in Part VII of Schedule 13, to any combination of place names and route numbers, to a description of a route or to the name of a road. "follow" may be omitted or varied to "via", "use" or "use" and "Junction" and the junction number. Where shown on the sign, "Junction" may be varied to "J"</p>
5	Illumination requirements: Schedule 17, item 4

100 min  
300 max



2901

Regulations in force under section 17 of the 1984 Act start to apply to the road at this point

Item	
1	Regulations: None
2	Directions: 14
3	Diagrams: None
4	<p>Permitted variants: Schedule 16, item 20                      The motorway route number may be placed above the symbol</p>
5	Illumination requirements: Schedule 17, item 1

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



Not more than 3 times the height of the capital letter on the lower part of the sign  
 — 250 min  
 — 400 max

2919.2

Distance ahead to a named motorway service area at which fuel, parking, toilets and refreshments are available, and a picnic area, overnight accommodation, LPG fuel and a Tourist Information Point or Centre may be available, 24 hours a day throughout the year, and showing the name of the operator and the price per litre of unleaded petrol


Item	
1	Regulations: 13
2	Directions: 14
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 The name of the operator may be varied. The operator's logo may be shown in the upper panel. The legend, logo, background and border of the upper panel may be in any contrasting colours. The upper panel border may be omitted. The upper panel may be omitted. "Puddleworth" shall be varied to another geographical name as appropriate. The LPG fuel, picnic area, "i" and bed symbols may be omitted as appropriate. The petrol price where shown shall accord with that currently being charged for 1 litre of unleaded petrol. The petrol price row may be omitted and the white petrol pump symbol shown in diagram 2310.2 added at the beginning of the top row of symbols
5	Illumination requirements: Schedule 17, item 4

Regulation 34(9)

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 8


### New diagrams for Schedule 8 to the 2002 regulations

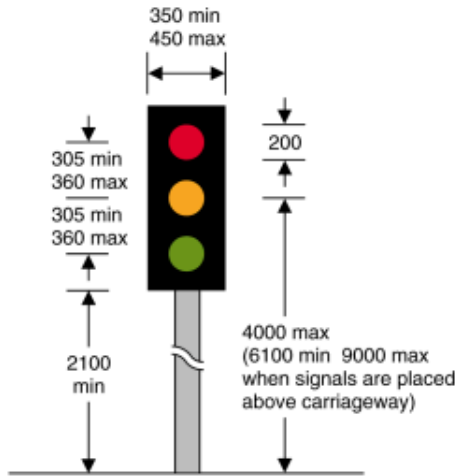

3000

Light signals for the control of vehicular traffic at road junctions, at signal-controlled crossing facilities, or at places where the headroom or width of the road is permanently reduced

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Schedule 16, item 47

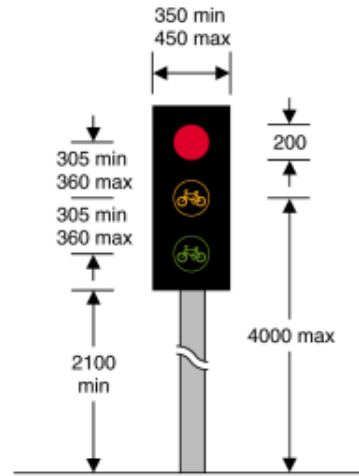

3000.2


Light signals for the control of vehicular traffic consisting solely of pedal cycles

Item	
1	Regulations: 4, 10, 33, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 1001, 1055.1, 1055.2, 4003.6
4	Permitted variants: None

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

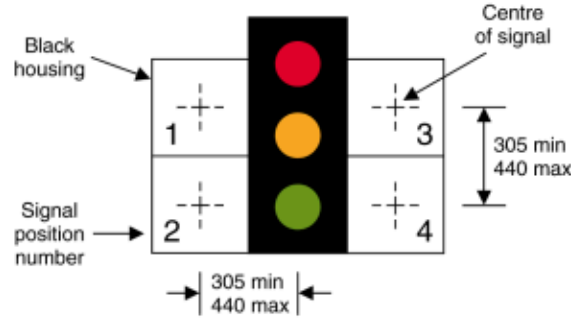

3000.7

As diagram 3000 with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2", "3" and "4" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted


Table of combinations

Item 1	Signal position	1	2	3	4
Item 2	Signal combinations	None	3001.2 (A, B or C); or 3001.3 (A, B or C); or 3013	None	None
		None	None	None	3001.2 (C, D or E); or 3001.3 (C, D or E); or 3013
		3013	3001.2 (A, B or C); or 3001.3 (A, B or C)	None	None
		None	None	3013	3001.2 (C, D or E); or 3001.3 (C, D or E)
		3001.2 (B or C); or 3001.3 (B or C)	3001.2 (A); or 3001.3 (A)	None	None
		3001.2 (C); or 3001.3 (C)	3001.2 (A or B); or 3001.3 (A or B)	None	None
		None	None	3001.2 (C or D); or 3001.3 (C or D)	3001.2 (E); or 3001.3 (E)
		None	None	3001.2 (C); or 3001.3 (C)	3001.2 (D or E); or 3001.3 (D or E)
		None	3013	None	None
None	None	None	3013		

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

### SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

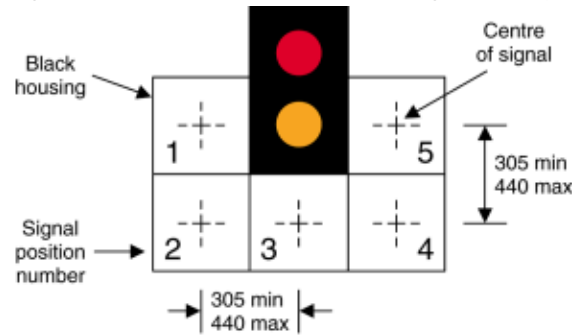

#### 3000.8

As diagram 3000, but without the green aspect and with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2", "3", "4" and "5" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted


Table of combinations

Item 1	Signal position	1	2	3	4	5
Item 2	Signal combinations	None	3013; or none	3001.2; or 3001.3	None	None
		None	None	3001.2; or 3001.3	3013; or none	None
		3013; or none	3001.2 (A, B or C); or 3001.3 (A, B or C)	3001.2 (D or E); or 3001.3 (D or E)	None	None
		3013; or none	3001.2 (A or B); or 3001.3 (A or B)	3001.2 (C, D or E); or 3001.3 (C, D or E)	None	None
		None	None	3001.2 (A, B or C); or 3001.3 (A, B or C)	3001.2 (D or E); or 3001.3 (D or E)	3013; or none
		None	None	3001.2 (A or B); or 3001.3 (A or B)	3001.2 (C, D or E); or 3001.3 (C, D or E)	3013; or none

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

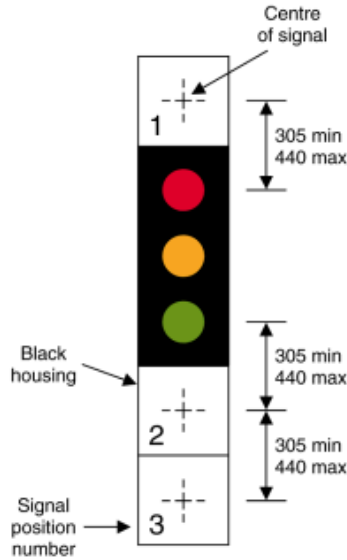

3000.9


As diagram 3000 with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2" and "3" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted

Table of combinations

Item 1	Signal position	1	2	3
Item 2	Signal combinations	3013	None	None
		None	3001.2; or 3001.3	3001.2; or 3001.3; or none
		None	3013	None
		None	3001.2; or 3001.3	3013; or none

Regulation 34(10)

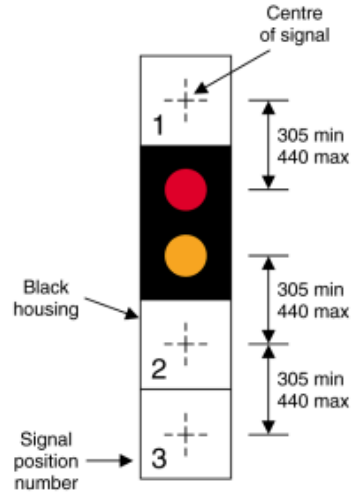

3000.10

As diagram 3000, but without the green aspect and with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2" and "3" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted

Table of combinations


Item 1	Signal position	1	2	3
Item 2	Signal combinations	3013; or none	3001.2; or 3001.3	None
		None	3001.2; or 3001.3	3001.2; or 3001.3; or 3013



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


## SCHEDULE—PART 9

### New diagrams for Schedule 9 to the 2002 regulations

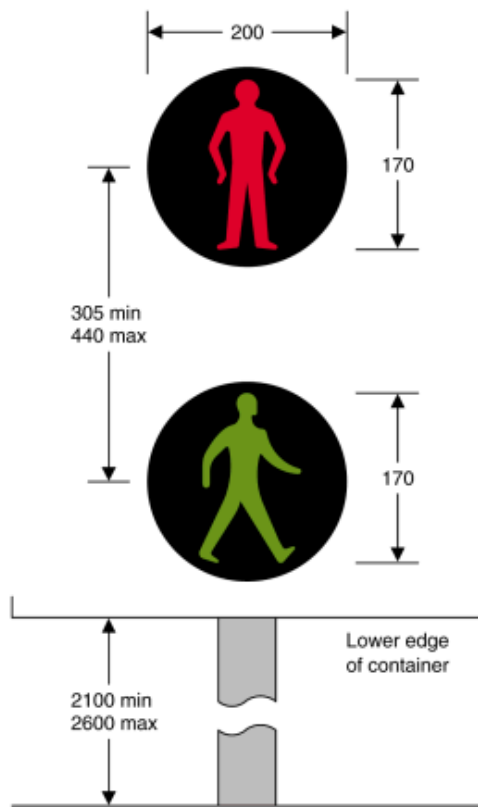

4002.1  
Light signals for pedestrians

Item	
1	Regulations: 4, 47, 47A
2	Directions: 18, 44A, 46, 49, 54, 54A, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003, 4003.1
4	Permitted variants: None

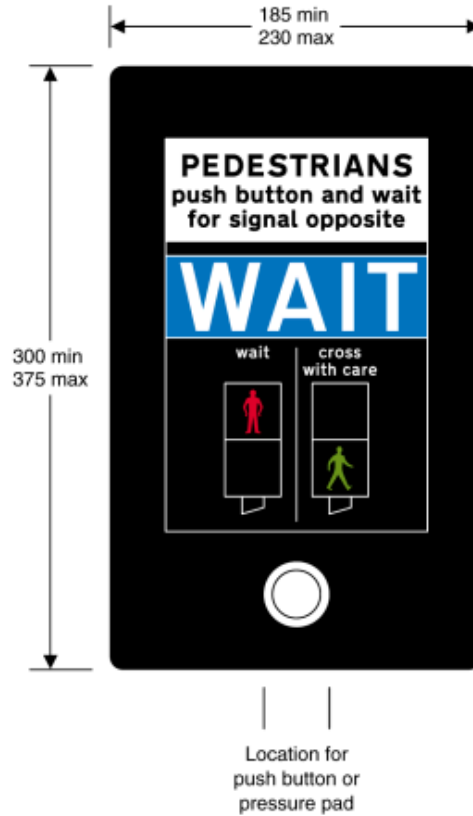


4003  
Instructions to pedestrians above the push button control for calling up pedestrian phases at light signals

Item	
1	Regulations: 4, 47, 47A
2	Directions: 44A, 46, 54, 54A, 55, 56
3	Diagrams: 4002.1
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

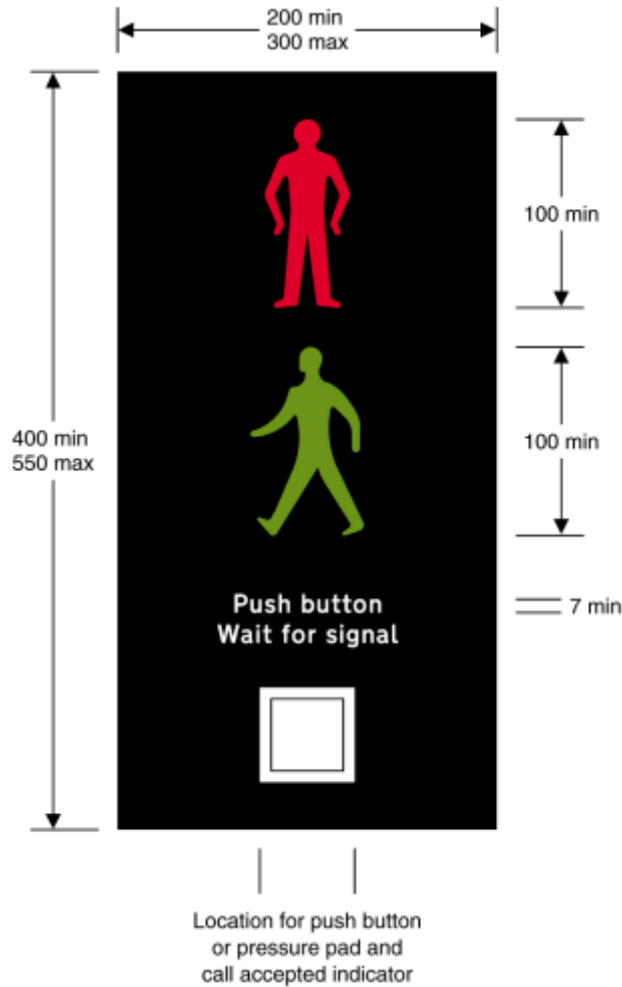

4003.1


Near side light signals and instructions for pedestrians at a pedestrian facility controlled by light signals

Item	
1	Regulations: 4, 47, 47A
2	Directions: 18, 44A, 46, 54, 54A, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4002.1, 4003.1A
4	Permitted variants: Schedule 16, item 28 The horizontal positions of the red and green figures may be varied independently of each other. Multiple red and green figures may be provided. The face containing the signal and instructions may be curved and may comprise more than one unit. The legend "Stand on mat" may be added between the legends "Push button" and "Wait for signal"

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

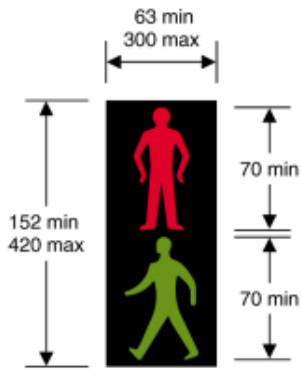

4003.1A  
Supplementary near side light signals for pedestrians at a pedestrian facility controlled by light signals

Item	
1	Regulations: 4, 47
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.1
4	Permitted variants: Schedule 16, Item 28 The horizontal positions of the red and green figures may be varied independently of each other. The face containing the signal may be curved

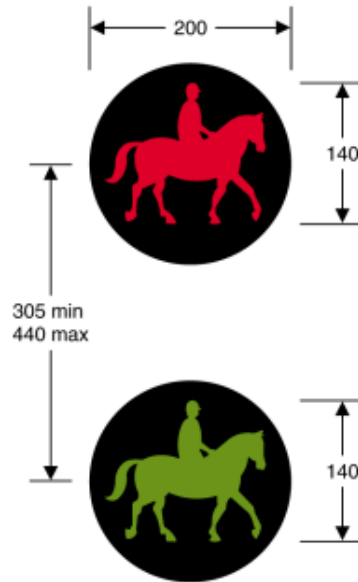


4003.2  
Light signals for equestrian traffic

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.3
4	Permitted variants: None

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

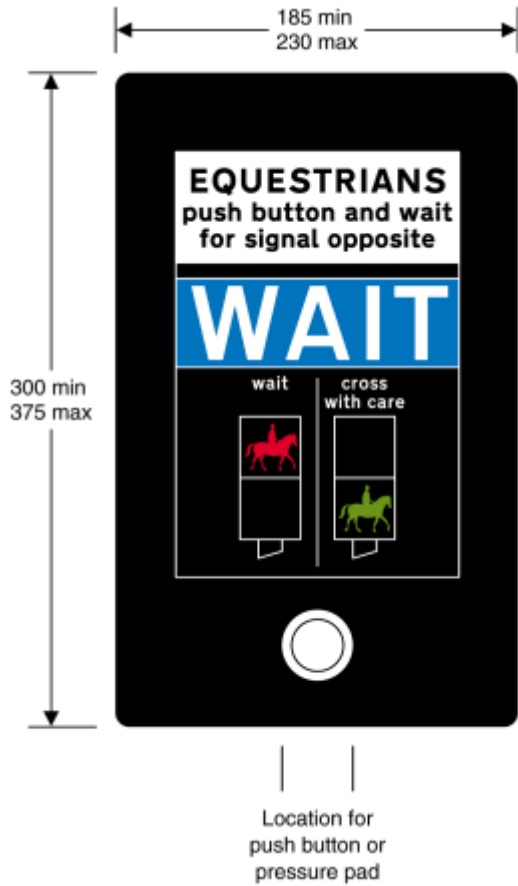

4003.3


Instructions to horse riders above the push button control for calling up equestrian traffic phases at light signals

Item	
1	Regulations: 4, 48
2	Directions: 44A, 46, 54, 55, 56
3	Diagrams: 4003.2
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

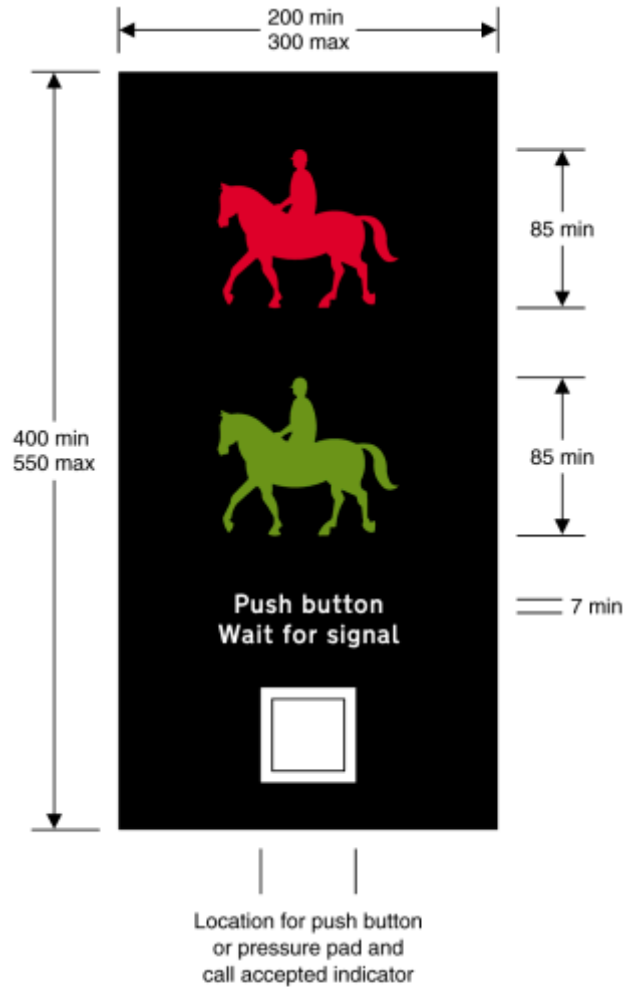

4003.4


Near side light signals and instructions for horse riders at an equestrian traffic crossing facility controlled by light signals

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.4A
4	Permitted variants: Schedule 16, item 28 The horizontal positions of the red and green ridden horse symbols may be varied independently of each other. Multiple red and green ridden horse symbols may be provided. The face containing the signal and instructions may be curved and may comprise more than one unit

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

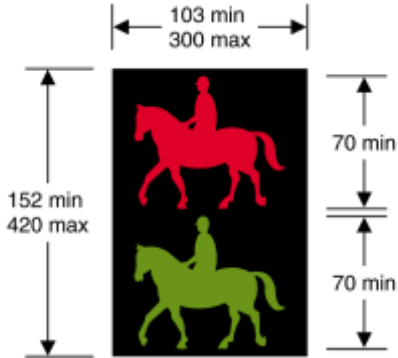


4003.4A

Supplementary near side light signals for horse riders at an equestrian traffic crossing facility controlled by light signals

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.4
4	Permitted variants: Schedule 16, item 28 The horizontal positions of the red and green ridden horse symbols may be varied independently of each other. The face containing the signal may be curved

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

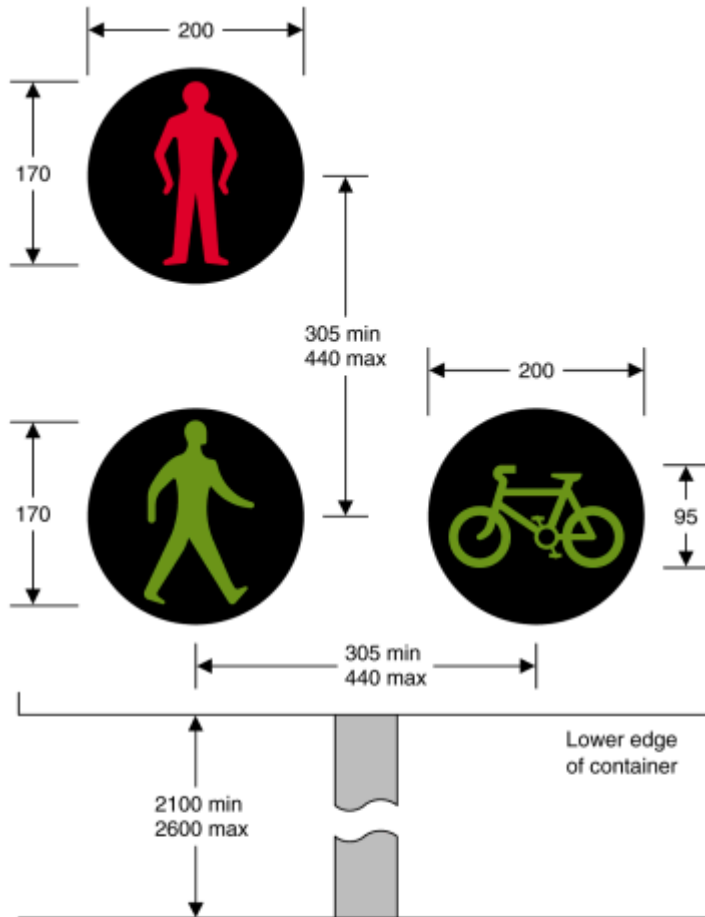

4003.5


Light signals for pedestrians and cyclists  
at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.6
4	Permitted variants: The cycle aspect may be positioned to the left of the green pedestrian aspect

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

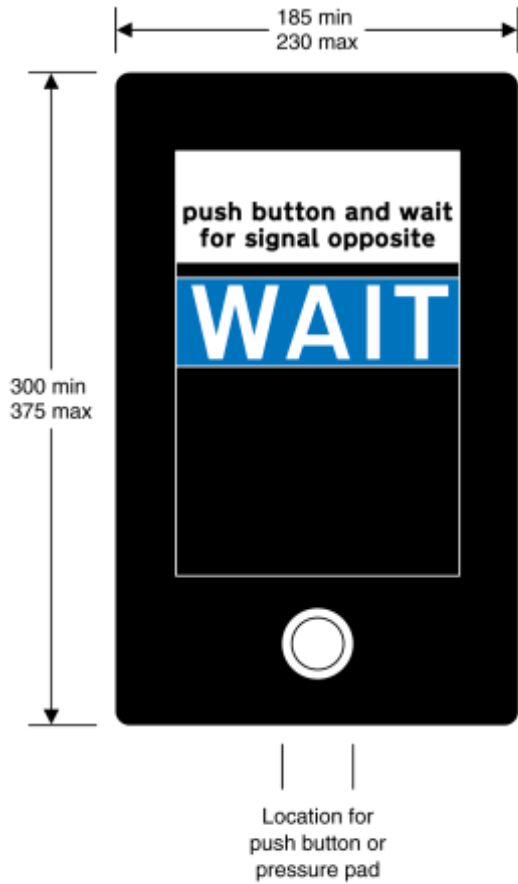

4003.6

- (a) Instructions to pedestrians and cyclists above the push button control for calling up pedestrian and cycle phases at a Toucan crossing; or
- (b) instructions to cyclists above the push button control for calling up cycle phases at a crossing controlled by the light signals shown in diagram 3000.2


Item	
1	Regulations: 4, 49
2	Directions: 44A, 46, 54, 55, 56
3	Diagrams: 3000.2, 4003.5
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow



**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

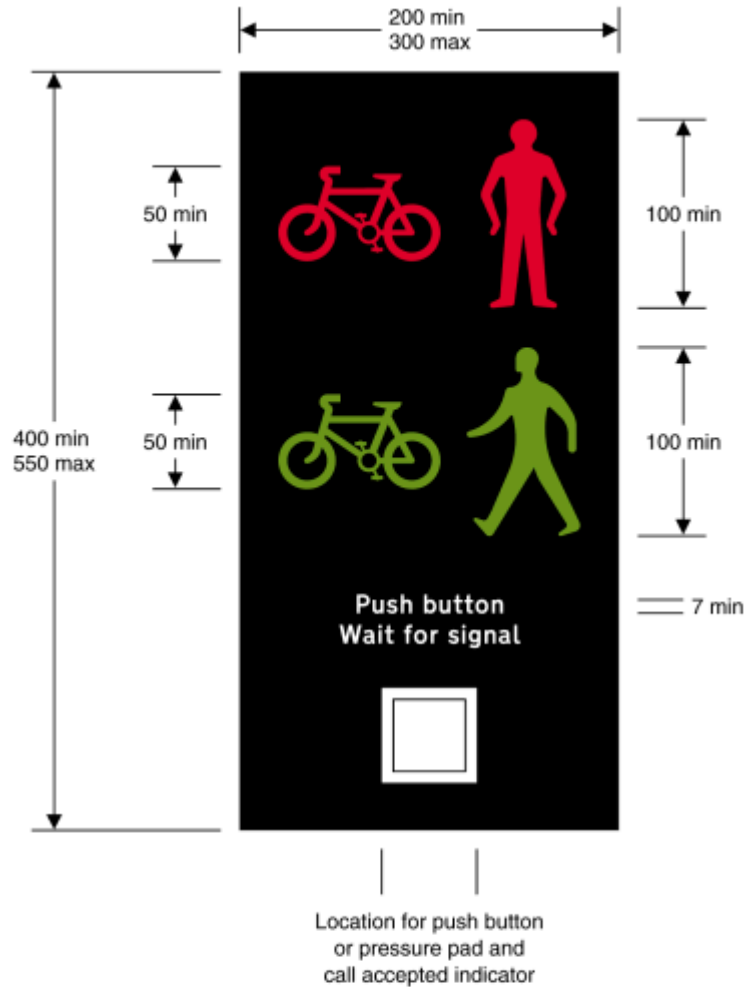

4003.7


Near side light signals and instructions for pedestrians and cyclists at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.7A
4	Permitted variants: The combined cycle and pedestrian symbols may be reversed in a mirror image. The face containing the signal and instructions may be curved and may comprise more than one unit

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

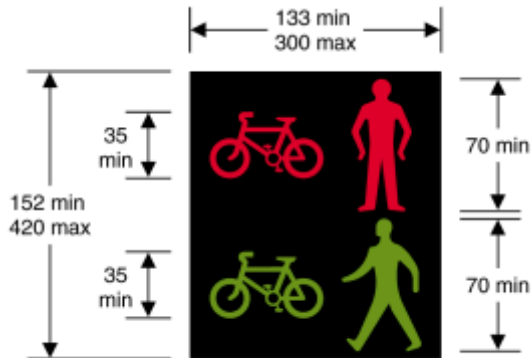

4003.7A

Supplementary near side light signals for pedestrians and cyclists at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.7
4	Permitted variants: The combined cycle and pedestrian symbols may be reversed in a mirror image. The face containing the signal may be curved

Regulation 34(11)

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 10

### New diagrams for Schedule 12 to the 2002 regulations



7005  
Delays possible for specified period  
owing to road works ahead

Item	
1	Regulations: 54
2	Directions: 36
3	Diagrams: None
4	Permitted variants: Schedule 16, item 38 The phrase "until March 2012" may be omitted. The diagram 7001 symbol and the distance plate may be omitted. The date may be on a single line
5	Illumination requirements: Schedule 17, item 1




7009  
Loose chippings on road ahead

Item	
1	Regulations: 54
2	Directions: 21, 36
3	Diagrams: 513.2, 570, 572, 573, 7009.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)

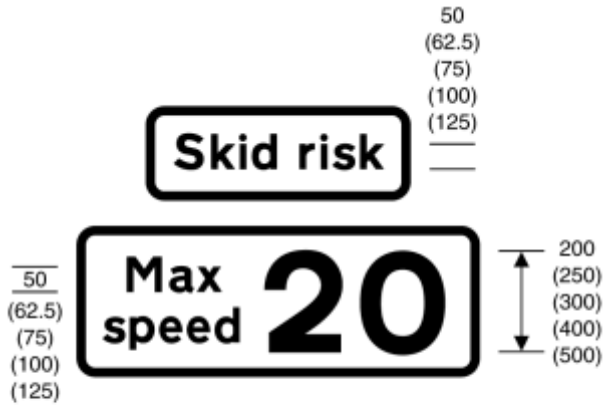

7009.1

Risk of skidding and maximum speed of 20 mph  
advised on road with loose chippings

Item	
1	Regulations: None
2	Directions: 21, 36
3	Diagrams: 7009
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)




7014.1  
Temporary or permanent reduction  
in bridge headroom ahead

Item	
1	Regulations: None
2	Directions: 36, 37
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, item 17



7016  
Zebra or signal-controlled crossing facility  
temporarily out of use  
(Sign for pedestrians, cyclists or equestrians)

Item	
1	Regulations: None
2	Directions: 36, 44A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9




7019  
Light signals not in use

Item	
1	Regulations: 54
2	Directions: 36, 44A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)

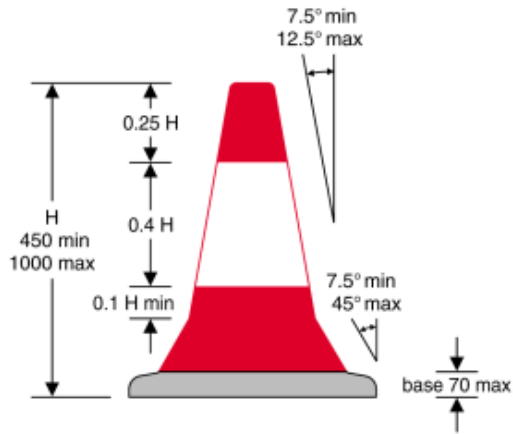

Item	
1	Regulations: 54, 56
2	Directions: 36, 41, 42
3	Diagrams: 7104, 7105
4	Permitted variants: The colour of the base may be varied in accordance with regulation 56(2)
5	Illumination requirements: Schedule 17, item 16

7101.1  
Edge of a route for vehicular traffic through or past a temporary obstruction (Traffic cone)

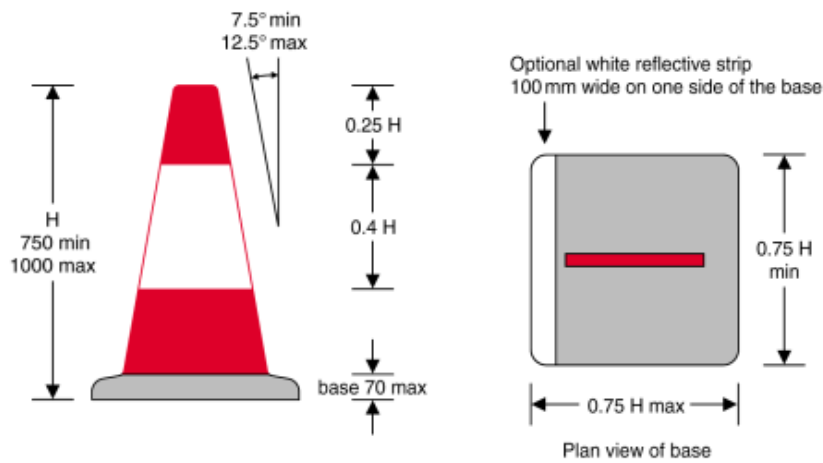


7102  
Edge of a route for vehicular traffic through or past a temporary obstruction on a motorway or dual carriageway road (Flat traffic delineator)

Item	
1	Regulations: 11, 54, 56
2	Directions: 36, 42
3	Diagrams: None
4	Permitted variants: The colour of the base may be varied in accordance with regulation 56(7)
5	Illumination requirements: Schedule 17, item 16

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

## SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)



7202

Two right hand lanes of a four lane dual carriageway road or of a one-way street closed to traffic ahead

Item	
1	Regulations: 54
2	Directions: 21, 36
3	Diagrams: 7208
4	Permitted variants: Schedule 16, item 16
5	Illumination requirements: Schedule 17, item 1



7282

Symbol that may be incorporated into a road works sign to indicate a lane subject to a temporary prohibition on goods vehicles exceeding the maximum gross weight shown

Item	
1	Regulations: None
2	Directions: 7, 36
3	Diagrams: Same as 7280
4	Permitted variants: Same as diagram 622.1A. The size of the diagram 622.1A symbol shall be increased to 900 mm diameter when used in conjunction with the sign shown in diagram 7283.1 or 7284.1
5	Illumination requirements: Not applicable

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)



7301  
Temporary access to a construction or road works site

Item	
1	Regulations: None
2	Directions: 36
3	Diagrams: 506.1
4	Permitted variants: The legend may be varied to: 1. "WORKS TRAFFIC ONLY" 2. "NO WORKS TRAFFIC" 3. "WORKS ACCESS" and an access identifier in white characters on the red background of the sign
5	Illumination requirements: Schedule 17, item 4



— 100 min  
— 250 max

7306  
Direction to be taken by road works or construction traffic to an access to a works site ahead

Item	
1	Regulations: None
2	Directions: 36
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 16 "ONLY" may be varied to an access identifier in white characters on the red background of the sign
5	Illumination requirements: Schedule 17, item 4



## PART 2

### The Traffic Signs (Amendment) (No. 2) General Directions 2011

#### Citation, commencement and interpretation

- 1.—(1) These general directions—
  - (a) may be cited as the Traffic Signs (Amendment) (No. 2) General Directions 2011;
  - (b) together with the regulations contained in Part 1 of this instrument, may be cited as the Traffic Signs (Amendment) (No. 2) Regulations and General Directions 2011; and
  - (c) come into force on 30th January 2012.
- (2) In these general directions—
  - (a) “the 1984 Act” means the Road Traffic Regulation Act 1984<sup>(8)</sup>; and
  - (b) “the 2002 general directions” means the Traffic Signs General Directions 2002<sup>(9)</sup>.

#### Preliminary

2. The 2002 general directions are amended as follows.

#### Amendment of direction 3

3. In direction 3 (interpretation—general), for paragraph (1), substitute—
  - “(1) In these Directions—
    - (a) “one-way road” means a road on which the driving of vehicles otherwise than in one particular direction is prohibited;
    - (b) “permit parking area” means an area into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 663.3;
    - (c) “restricted parking zone” means an area—
      - (i) into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 663.2; and
      - (ii) in which none of the road markings shown in diagrams 1017, 1018.1, 1019 and 1020.1 has been placed;
    - (d) “two-way street” means a road which is not a one-way road;
    - (e) “the Regulations” means the Traffic Signs Regulations 2002; and
    - (f) the expressions listed in paragraph (2) have the same meaning as in the Regulations.”.

#### Amendment of direction 7

4. In direction 7 (signs to be placed only to indicate the effect of a statutory prohibition), in paragraph (2)(a)—
  - (a) after “637.2,” insert “637.2A,”;
  - (b) after “660.7,” insert “660.8, 660.9,”;
  - (c) after “663.1,” insert “663.2, 663.3,”;

---

<sup>(8)</sup> 1984 c.27.

<sup>(9)</sup> Part II of S.I. 2002/3113. Relevant amending instruments are S.I. 2004/1275, 2005/1670, 2008/2177 and 2011/1040.

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

- (d) after “664,” insert “664.1,”;
- (e) for “958.1, 959, 959.1,” substitute “958A, 958.1, 959, 959A, 959.1,”; and
- (f) after “960.1,” insert “960.2,”.

#### **Amendment of direction 8**

5. In direction 8 (the placing of certain signs to indicate the beginning of a restriction, requirement, prohibition or speed limit)—

- (a) in paragraph (1), after “663.1,” insert “663.2, 663.3,”; and
- (b) in paragraph (4), after “Where the relevant road has” insert “only”.

#### **Amendment of direction 9**

6.—(1) Direction 9 (beginning of a speed limit—further provisions) is amended as follows.

(2) In paragraph (4), for—

“be placed not further than 20 metres from the junction and so as to be visible to such traffic, on each side of the carriageway by which traffic may pass from the relevant road into the other road.” substitute—

“be placed—

- (a) so as to be visible to such traffic; and
  - (b) not further than 20 metres from the junction—
    - (i) if the relevant road has only one carriageway, on each side of that carriageway; or
    - (ii) if the relevant road is a dual carriageway road, on each side of the carriageway by which traffic may pass from the relevant road into the other road.”.
- (3) For paragraph (5)(b), substitute—
- “(b) signs indicating the maximum speed limit have been placed on the other road in accordance with direction 11 not more than 100 metres from the junction and—
    - (i) on each side of the junction; or
    - (ii) where traffic is permitted to enter the other road from the relevant road by proceeding onto the carriageway on only one side of the junction, on that side of the junction.”.

#### **Amendment of direction 10**

7. In direction 10 (the placing of certain signs to indicate the end of a restriction, requirement, prohibition or speed limit)—

- (a) in paragraph (1), after “664,” insert “664.1,”; and
- (b) in paragraph (8), after “If the relevant road has” insert “only”.

#### **Amendment of direction 11**

8.—(1) Direction 11 (repeater signs) is amended as follows.

(2) In paragraph (1)—

- (a) after “637.2,” insert “637.2A,”;
- (b) after “660.6,” insert “660.7, 660.8, 660.9,”;
- (c) after “661.1,” insert “661.2A,”;

- (d) after “959,” insert “959A,”; and
  - (e) after “960.1” insert “, 960.2”.
- (3) For paragraph (2), substitute—
- “(2) Subject to paragraphs (2A), (2B), (2C), (2D), (2E), (2F), (2G), (3) and (4), at least one of each of the signs to which this paragraph applies shall be placed—
  - (a) along a road which is subject to a restriction, requirement, prohibition or speed limit which can be indicated by the sign; and
  - (b) in the case of the signs shown in diagrams 614, 632, 642, 670 (except as mentioned in paragraph (1)), 672, 956, 957, 959, 959A, 959.1, 960, 960.1, 960.2 and 961, to face each stream of traffic to which the sign is intended to convey that restriction, requirement, prohibition or speed limit.”.
- (4) After paragraph (2), insert—
- “(2A) The sign shown in diagram 614 need not be placed in accordance with paragraph (2)—
  - (a) where the prohibition indicated by that sign applies only at a point on a road and not along a length of road; or
  - (b) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
    - (i) has only one carriageway; and
    - (ii) is shorter than 100 metres.
  - (2B) The sign shown in diagram 632 need not be placed in accordance with paragraph (2) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
    - (a) has no junction with another road; and
    - (b) is shorter than 400 metres.
  - (2C) The sign shown in diagram 642 need not be placed in accordance with paragraph (2) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
    - (a) is subject to a speed limit of 30 mph and is shorter than 800 metres;
    - (b) is subject to a speed limit of 40 mph and is shorter than 1100 metres;
    - (c) is subject to a speed limit of 50 mph and is shorter than 1350 metres; or
    - (d) is subject to a speed limit of 60 mph or to a national speed limit and is shorter than 1600 metres.
  - (2D) The signs shown in diagrams 660 and 660.3 need not be placed in accordance with paragraph (2) on a road within a permit parking area.
  - (2E) The sign shown in diagram 670 need not be placed in accordance with paragraph (2) along a length of road which is subject to the speed limit indicated by that sign if that length of road—
    - (a) is subject to a speed limit of 20 mph and is shorter than 200 metres;
    - (b) is subject to a speed limit of 30 mph, is shorter than 200 metres and does not have a system of carriageway lighting furnished by lamps lit by electricity;
    - (c) is subject to a speed limit of 40 mph and is shorter than 250 metres;
    - (d) is subject to a speed limit of 50 mph and is shorter than 350 metres; or

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

(e) is subject to a speed limit of 60 mph, is shorter than 400 metres and is a dual carriageway road or a motorway.

(2F) The sign shown in diagram 672 need not be placed in accordance with paragraph (2) along a length of road which is subject to the speed limit indicated by that sign if that length of road is shorter than 250 metres.

(2G) The signs shown in diagrams 959 and 959A need not be placed in accordance with paragraph (2) along a length of road along which, or along part of which, there is a bus lane if that length of road—

- (a) has no junction with another road; and
- (b) is shorter than 300 metres.”.

(5) For paragraph (3), substitute—

“(3) The sign shown in diagram 670—

- (a) when varied to “20”, need not be placed in accordance with paragraph (2) on a road within an area into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 674; and
- (b) when displayed on a variable message sign, need not be placed in accordance with paragraph (2) when the variable message sign is mounted on a gantry or other structure and is so placed that a traffic lane of the carriageway or an actively managed hard shoulder passes directly beneath it.”.

(6) In paragraph (4)(b), for “motorway” substitute “road”.

(7) For paragraph (5), substitute—

“(5) Subject to paragraph (5A), at least one sign shown in diagram 671 shall be placed—

- (a) along a length of road (other than a motorway) on which—
  - (i) there is a system of street or carriageway lighting furnished by lamps lit by electricity placed not more than 183 metres apart in England and Wales or not more than 185 metres apart in Scotland; and
  - (ii) a national speed limit is in force; and
- (b) to face each stream of traffic to which the sign is intended to convey that speed limit.”.

(8) After paragraph (5), insert—

“(5A) The sign shown in diagram 671 need not be placed in accordance with paragraph (5) along a length of road which is subject to the speed limit indicated by that sign if that length of road—

- (a) has only one carriageway and is shorter than 400 metres; or
- (b) is a dual carriageway road and is shorter than 450 metres.

(5B) In this direction, “bus lane” has the meaning given in regulation 23.”.

(9) Omit paragraphs (6) and (7).

### **Amendment of direction 13**

9. In direction 13 (signs to be placed only on specified types of road), in paragraph (3)—

- (a) for “2310.1” substitute “2310.2”;
- (b) for “2511, 2512,” substitute “2511.1, 2512.1.”;
- (c) after “2601.1,” insert “2601.1A.”;
- (d) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C.”; and

- (e) omit “2703, 2704, 2705, 2706, 2707,”.

### **New direction 13A**

**10.** After direction 13, insert—

“**13A.**—(1) The signs shown in diagrams 2703, 2704, 2705, 2706 and 2707 may not be placed on the main carriageways of a motorway.

(2) In this direction, “main carriageways of a motorway” means all those parts of a motorway—

- (a) onto which vehicular traffic may pass from a motorway entrance slip road; and
- (b) from which vehicular traffic may pass onto a motorway exit slip road, and

includes the carriageways, the central reservation, the hard shoulders and the verges.

(3) For the purposes of paragraph (2), “carriageway” and “verge” each has—

- (a) in relation to a motorway in England or Wales, the same meaning as in the Motorways Traffic (England and Wales) Regulations 1982(**10**); and
- (b) in relation to a motorway in Scotland, the same meaning as in the Motorways Traffic (Scotland) Regulations 1995(**11**).”.

### **Amendment of direction 14**

**11.** In direction 14 (signs to be placed only on specified types of road), in paragraph (1), for “2919.1” substitute “2919.2”.

### **Amendment of direction 17**

**12.** In direction 17 (signs to be placed only in conjunction with specified road markings— except signs for prohibitions and restrictions on waiting etc), in the table in paragraph (1)—

- (a) after item 8, insert—

“8A.	958A	1010”
------	------	-------

- (b) after item 10, insert—

“10A.	959A	1048 and 1049”
-------	------	----------------

- (c) after item 14, insert—

“14A.	960.2	1057”
-------	-------	-------

### **Amendment of direction 18**

**13.**—(1) Direction 18 (road markings to be placed only in conjunction with other road markings or specified signs—except road markings for prohibitions and restrictions on waiting etc) is amended as follows.

(2) In table 1 in paragraph (1)—

- (a) after item 3, insert—

(10) [S.I. 1982/1163](#). A relevant amendment was made by [S.I. 1984/1479](#).

(11) [S.I. 1995/2507 \(S.183\)](#), to which there are amendments not relevant to these general directions.

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

“3A.	1001.2A	3000, 3000.7, 3000.8, 3000.9 or 3000.10 placed adjacent to the stop line appearing above the pedal cycle symbol in diagram 1001.2A”
------	---------	---

- (b) in column (3) of item 4, in paragraph (b)—
  - (i) after “4003.1” insert “(whether or not used in conjunction with 4003.1A)”;
  - (ii) after “4003.4” insert “(whether or not used in conjunction with 4003.4A)”;
  - (iii) after “4003.7” insert “(whether or not used in conjunction with 4003.7A)”;
- (c) after item 10, insert—

“10A.	1050	1049”
-------	------	-------

- (d) for the entry in column (3) of item 11, substitute—
  - “(a) 955, 956, 957, 959.1, 960.1, 960.2, 965 or 967;
  - (b) 1001.2 when used in conjunction with 1004 or 1004.1; or
  - (c) 2601.2 or 2602.2”; and
- (e) in column (3) of item 18, for “direction 11(2)” substitute “direction 11”.
- (3) In paragraph (2), after “1001.2” insert “or 1001.2A”.
- (4) In table 2 in paragraph (3)—
  - (a) after item 5, insert—

“5A.	1044.2	615 and 811”
------	--------	--------------

- (b) for the entry in column (3) of item 6, substitute—
  - “(a) 1049 and 959;
  - (b) 1049 and 959A; or
  - (c) 1049 and 960”;
- (c) for the entry in column (3) of item 8, substitute—
  - “(a) 1048 and 959;
  - (b) 1048 and 959A;
  - (c) 1048 and 960; or
  - (d) 1048.1 and 960 varied to include the pedal cycle symbol”; and
- (d) omit—

“11.	1050	964 and 1049”
------	------	---------------

**Amendment of direction 21**

**14.** In direction 21 (plates to be placed only in combination with specified signs), in the table in paragraph (1)—

- (a) in column (3) of item 12, after “530” insert “or 530A”;
- (b) in column (3) of item 13, after “530,” insert “530A,”;
- (c) in column (3) of each of items 36 and 37, after “530,” insert “530A,”;

**Status:** This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(d) for the entry in column (3) of item 73, substitute “958, 958A, 958.1, 959, 959A or 959.1”; and

(e) after item 76, insert—

“76A.	7009.1	7009”
-------	--------	-------

**Amendment of direction 24**

**15.**—(1) Direction 24 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking) is amended as follows.

(2) In paragraph (1), for “subject to paragraph (2)” substitute “subject to paragraphs (2) and (5)”.

(3) In the table in paragraph (1), after item 19, insert—

“19A.	660.8	(a) 1028.3, 1028.4 or 1032, in each case when varied to indicate “CAR CLUB ONLY” or “CAR CLUB”; or (b) 1033 when varied to indicate “CAR CLUB”
19B.	660.9	(a) 1028.3 or 1028.4, in each case when varied to indicate “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”; (b) 1032 when varied to indicate “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”; or (c) 1033 when no legend appears”

(4) After paragraph (4), insert—

“(5) Paragraph (1) shall not apply to the signs shown in diagrams 660 and 660.3 when placed on a road within a permit parking area.”.

**Amendment of direction 25**

**16.**—(1) Direction 25 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking) is amended as follows.

(2) For paragraph (1) (except the table), substitute—

“(1) Subject to paragraphs (2) and (3), a road marking shown in a diagram whose number appears in, and which is in the form (if any) specified in, an item in column (2) of the table may be placed on a road only in conjunction with, and on the same side of the road as, a sign shown in a diagram whose number appears in, and which is in the form (if any) specified in, column (3) of that item.”.

(3) In the table in paragraph (1)—

(a) in column (3) of item 11, after “when” insert “the upper panel is varied to the sign shown in diagram 650.2 or 650.3 or”;

(b) in column (3) of item 15, after “660.7,” insert “660.9,”;

(c) after item 12, insert—

“12A.	1028.3 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
-------	---	-------

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

12B.	1028.3 when varied to “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”
------	--	--

(d) after item 14, insert—

“14A.	1028.4 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
14B.	1028.4 when varied to “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”

(e) after item 18, insert—

“18A.	1032 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
18B.	1032 when varied to “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”

(f) after item 20, insert—

“21.	1033 when varied to “CAR CLUB”	660.8”
------	--------------------------------	--------

(4) After paragraph (2), insert—

“(3) Except for the road markings shown in diagrams 1017, 1018.1, 1019 and 1020.1, none of the road markings shown in the diagrams whose numbers appear in, and which are in the form (if any) specified in, the items in column (2) of the table may be placed in a permit parking area.”.

**Amendment of direction 26**

**17.** In direction 26 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking), omit “664.”.



### **New direction 26A**

**18.** After direction 26, insert—

“**26A.**—(1) The sign shown in diagram 637.2A may be placed only in a restricted parking zone.

(2) The sign shown in diagram 663.2 may be placed only at the boundary of a restricted parking zone.

(3) The sign shown in diagram 663.3 or 664.1 may be placed only at the boundary of a permit parking area.

(4) The sign shown in diagram 664 may be placed only at the boundary of a controlled parking zone or of a restricted parking zone.”.

### **Amendment of direction 28**

**19.** In direction 28 (signs to be placed only at specified sites or for specified purposes—migratory toad crossings), in paragraph (b), after “during” insert “January,”.

### **Amendment of direction 35**

**20.** For direction 35, substitute—

“**35.**—(1) The road marking shown in diagram 1043 or 1044 shall not be placed at a gyratory system or roundabout.

(2) The road marking shown in diagram 1044.1 may be placed—

(a) only on an area of carriageway at a gyratory system or roundabout; and

(b) only if the entry of traffic into that area of carriageway is at all times controlled by traffic light signals.

(3) The road marking shown in diagram 1044.2 may be placed only on an area of carriageway which is not greater than 4.5 metres wide at its narrowest point.”.

### **Amendment of direction 36**

**21.** In direction 36 (restrictions on the placing of temporary signs), after “other than in diagrams 7014,” insert “7014.1,”.

### **Amendment of direction 37**

**22.** In direction 37 (restrictions on the placing of temporary signs), after paragraph (1), insert—

“(1A) The sign shown in diagram 7014.1 may, in relation to a bridge under which a road passes, be placed only in connection with works involving a temporary or permanent reduction in the maximum height of vehicle able to pass, on the road, under the bridge (in this direction, “temporary reduction” and “permanent reduction” respectively).

(1B) Where the sign shown in diagram 7014.1 is placed in connection with works involving a temporary reduction, it may be retained only until completion of those works.

(1C) Where the sign shown in diagram 7014.1 is placed in connection with works involving a permanent reduction, it may be retained not later than the end of the period of 6 months beginning with completion of those works.”.

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

### **New direction 38A**

23. After direction 38 (restrictions on the placing of temporary signs), insert—

- “38A.—(1) A warning light which shows an intermittent light may not be placed—
- (a) more than 50 metres from a street lamp lit by electricity; or
  - (b) on a road subject to a speed limit of more than 40 mph.
- (2) In this direction, “warning light” has the same meaning as in regulation 55.”.

### **Revocation of direction 40**

24. Direction 40 is revoked.

### **Amendment of direction 41**

25.—(1) Direction 41 (mounting and backing of signs) is amended as follows.

(2) In paragraph (1), for “Subject to paragraphs (2) and (3)” substitute “Subject to paragraphs (2), (3) and (3A)”.

(3) After paragraph (3), insert—

“(3A) The signs shown in diagrams 606, 610, 611, 616, 951, 955, 956 and 957 may be mounted on—

- (a) a bollard which—
  - (i) is illuminated by means of internal lighting; and
  - (ii) conforms to British Standard BS EN 12899-2:2007 or to a corresponding EEA Standard; or
- (b) a self-righting bollard which—
  - (i) is illuminated by the use of retroreflecting material; and
  - (ii) conforms to British Standard BS 8442:2006 or to a corresponding EEA Standard.”.

### **Amendment of direction 42**

26.—(1) Direction 42 (mounting and backing of signs) is amended as follows.

(2) In paragraphs (1)(b)(ii) and (3)(b), for “BS 873” substitute “BS EN 12899-1:2007 Incorporating corrigenda May 2008 and June 2009”.

### **New direction 44A**

27. After direction 44 (mounting of the signs shown in diagrams 560 and 561), insert—

#### **“Mounting of signs with light signals**

44A.—(1) Subject to paragraphs (2), (3), (4), (5) and (6), where the light signals prescribed by regulation 33 (whether or not varied in accordance with regulation 34) (“the regulation 33 signals”) or 47 are mounted on a post or other support specially provided for the purpose (“the post”), no other signs may be mounted on the post or affixed, whether directly or indirectly, to those light signals.

(2) One of each of the signs shown in diagrams 606, 612, 613, 614, 616, 954.5, 954.6 and 954.7 may be affixed to the regulation 33 signals, but only if those signs are so placed

that they face the stream of traffic to which they are intended to convey the warnings, information, requirements, restrictions or prohibitions prescribed by the Regulations.

(3) One of each of the signs shown in diagrams 606, 612, 613, 614 and 616 may, in addition to or instead of being affixed to the regulation 33 signals, be mounted on the post, but only if—

- (a) those signs are, when mounted on the post, so placed that they face the stream of traffic to which they are intended to convey the warnings, information, requirements, restrictions or prohibitions prescribed by the Regulations; and
- (b) where the sign shown in any particular one of those diagrams is, in addition to being mounted on the post, affixed to the light signals, the sign shown in that diagram does not, when mounted on the post, face the same stream of traffic as is faced by the sign which is shown in that diagram and affixed to the light signals.

(4) Where the regulation 33 signals are mounted on the post, additional regulation 33 signals may be mounted on the post.

(5) One of each of the signs shown in diagrams 543.1, 954, 954.2, 954.3, 954.4, 7016 and 7019 may be mounted on the post, but only if those signs are so placed that they face the stream of traffic to which they are intended to convey the information prescribed by the Regulations.

(6) Paragraph (1) does not prohibit the mounting, on the post, of the signs shown in diagrams 4002.1, 4003, 4003.1, 4003.1A (when placed with the sign shown in diagram 4003.1), 4003.2, 4003.3, 4003.4, 4003.4A (when placed with the sign shown in diagram 4003.4), 4003.5, 4003.6, 4003.7 and 4003.7A (when placed with the sign shown in diagram 4003.7).”.

#### **Amendment of direction 46**

**28.**—(1) Direction 46 (mounting and backing of light signals, matrix signs and warning lights) is amended as follows.

(2) In paragraph (2)(b)—

- (a) after “4003.1,” insert “4003.1A,”;
- (b) after “4003.4,” insert “4003.4A,”; and
- (c) for “or 4003.7” substitute “, 4003.7 or 4003.7A”.

(3) In paragraph (7)(b), for “regulation 33(1) or (2)” substitute “regulations 33(1) or (2), 41, 47, 48 or 49”.

#### **Substitution of direction 47**

**29.** For direction 47 (placing of road marking shown in diagram 1001 or 1001.2 in conjunction with light signals), and the heading to it, substitute—

##### **“Placing of road marking shown in diagram 1001, 1001.2 or 1001.2A in conjunction with light signals**

**47.**—(1) The light signals prescribed by regulation 33(1) may be placed only in conjunction with—

- (a) the road marking shown in diagram 1001; or
- (b) subject to direction 18(2), the road marking shown in diagram 1001.2 or 1001.2A.

(2) The light signals prescribed by regulation 33(2) or 39(1) may be placed only in conjunction with the road marking shown in diagram 1001.

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

(3) Paragraphs (1) and (2) shall not apply to light signals while works which necessitate the temporary removal of a road marking are being executed on a road near the light signals.”.

#### **Amendment of direction 49**

**30.** In direction 49 (placing of road marking shown in diagram 1001.3—zig-zag lines), in paragraph (1)(a)—

- (a) after “4003.4” insert “(whether or not placed with the signal shown in diagram 4003.4A)”; and
- (b) after “4003.7” insert “(whether or not placed with the signal shown in diagram 4003.7A)”.

#### **Amendment of direction 54**

**31.** In direction 54 (placing of signals and other signs at crossings), for the words “at signal-controlled crossing facilities” to the end, substitute—

“at signal-controlled crossing facilities where all streams of vehicular traffic are stopped only for the purpose of enabling pedestrians, cyclists or equestrians to cross the carriageway.”.

#### **Amendment of direction 55**

**32.—**(1) Direction 55 (placing of various light signals) is amended as follows.

(2) In paragraph (6), after “the light signals shown in diagram” insert “3000.2 or”.

(3) After paragraph (7), insert—

“(7A) The light signals shown in diagram 4003.1 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1) or (2); or
- (b) the light signals prescribed by regulation 33(1) or (2) and the light signals shown in diagram 4003.1A.

(7B) The light signals shown in diagram 4003.1A may be placed only in conjunction with the light signals shown in diagram 4003.1 and the light signals prescribed by regulation 33(1) or (2).”.

(4) For paragraph (8), substitute—

“(8) The light signals shown in diagram 4003.2 may be placed only in conjunction with the light signals prescribed by regulation 33(1).

(8A) The light signals shown in diagram 4003.4 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1); or
- (b) the light signals prescribed by regulation 33(1) and the light signals shown in diagram 4003.4A.

(8B) The light signals shown in diagram 4003.4A may be placed only in conjunction with the light signals shown in diagram 4003.4 and the light signals prescribed by regulation 33(1).”.

(5) For paragraph (9), substitute—

“(9) The light signals shown in diagram 4003.5 may be placed only in conjunction with the light signals prescribed by regulation 33(1).

(9A) The light signals shown in diagram 4003.7 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1); or
- (b) the light signals prescribed by regulation 33(1) and the light signals shown in diagram 4003.7A.

(9B) The light signals shown in diagram 4003.7A may be placed only in conjunction with the light signals shown in diagram 4003.7 and the light signals prescribed by regulation 33(1).”.

#### **Amendment of direction 56**

**33.** In direction 56 (approval of types of sign and signals by the Secretary of State), in paragraph (2)(f), for “2511, 2512” substitute “2511.1, 2512.1”.

#### **Amendment of direction 57**

**34.**—(1) Direction 57 (studs) is amended as follows.

(2) In paragraph (4), for ““the European Standards” means European Standards EN 1463—1: 1997 and 1463—2: 2000” substitute ““the British Standards” means British Standards BS EN 1463-1:1998 Incorporating Amendment No. 1 and BS EN 1463-2:2000”.

(3) For paragraph (5), substitute—

“(5) A type of stud meets the requirements of this paragraph if and only if, being a type of stud which falls within a description specified in column (2) of an item in the table, it meets—

- (a) the requirement or test specification, of the British Standards, specified in column (3) of the item, as that requirement or specification applies to studs within the class specified in that column; or
- (b) a requirement or test specification, in a corresponding EEA Standard, equivalent to the requirement or test specification of those British Standards as that requirement or specification of the British Standards applies to studs within the class specified in that column.”.

(4) In the “NOTE” beneath the table, for “the European Standards” substitute “the British Standards”.

#### **Amendment of Schedule 1 to the general directions**

**35.**—(1) Schedule 1 to the 2002 general directions (placing of signals and other signs at signal-controlled crossing facilities) is amended as follows.

(2) In paragraph 1, after the definition of “near side signals” insert—

““supplementary near side signals” means a sign of the size, colour and type shown in diagram 4003.1A, 4003.4A and 4003.7A;”.

(3) In paragraph 6(4) (near side signals at crossings)—

- (a) in paragraph (a), for “regulation 49(5) or (8)” substitute “regulation 47(2A), 48(2A), 49(2A) or 49(8)”;
- (b) after paragraph (a), omit “and”; and
- (c) after paragraph (b), insert—

“and

*Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

- (c) one set of supplementary near side signals may be placed above each set of near side signals at the crossing.”.

### Saving

**36.**—(1) Paragraph (2) applies to any sign which—

- (a) is shown in diagram 832.1A, 832.2A, 2310.1, 2511, 2512 or 2919.1 in the Traffic Signs Regulations 2002(**12**) as in force immediately prior to the coming into force of the Traffic Signs (Amendment) (No. 2) Regulations 2011(**13**); and
- (b) is, by regulation **35** of the Traffic Signs (Amendment) (No. 2) Regulations 2011, treated as prescribed by the 2002 regulations.

(2) Subject to paragraphs (3) and (4), in relation to a sign to which this paragraph applies, any provision of the 2002 general directions, as amended by these general directions, which would, but for the omission by these general directions of references to the diagram in which that sign is shown, refer to that diagram, is to be treated as referring to that diagram notwithstanding the omission, by these general directions, of the reference to that diagram in that provision.

(3) In relation to the signs shown in each of diagrams 832.1A, 832.2A, 2310.1, 2511 and 2512, paragraph (2) ceases to have effect on the expiry of the period of two years beginning with the date on which these general directions come into force.

(4) In relation to the sign shown in diagram 2919.1, paragraph (2) ceases to have effect on the expiry of the period of ten years beginning with the date on which these general directions come into force.

Signed by authority of the Secretary of State for Transport

*Norman Baker*  
Parliamentary Under Secretary of State  
Department for Transport

20th December 2011

---

### EXPLANATORY NOTE

*(This note is not part of the instrument)*

This instrument amends the Traffic Signs Regulations and General Directions 2002 ([S.I. 2002/3113](#), “the TSRGD 2002”).

Bus lanes, clearways—Regulations [10](#), [11](#), [12](#), [15](#), [31\(4\)\(a\)\(v\)](#) and [32\(2\)](#), and directions [4\(e\)](#), [8\(2\)\(d\)](#), [12\(a\)](#) and [\(b\)](#), [13\(4\)\(b\)](#) and [\(c\)](#) and [14\(d\)](#), amend in relation to bus lanes and to clearways.

---

(12) Part I of [S.I. 2002/3113](#). Relevant amending instruments are [S.I. 2003/2155](#), [2004/3168](#), [2005/1670](#), [2005/2929 \(W.214\)](#), [2005/3225 \(W.237\)](#), [2006/594](#), [2006/2083](#), [2008/2177](#), [2011/935](#) and [2011/1040](#) and [S.I. 2005/344](#) and [2006/129](#).

(13) Part 1 of this instrument.

Civil emergency signs—Regulation 25 amends to make provision about temporary signs for conveying traffic warnings or information about a civil emergency or the prospect of a civil emergency.

Corrections—Regulations 3(5), 4 and 20, and directions 5(b), 7(b) and 31, make corrections.

Designated lane—Regulation 3 inserts a definition of a “designated lane”. See, in relation to this, road marking 1049 as substituted by these amending regulations, and new sign 959A inserted by these amending regulations.

Illumination—Regulations 16 and 31 amend in relation to illumination of signs, including road markings.

Mounting and backing of signs—Directions 25, 26, 27 and 28 amend in relation to mounting and backing of signs.

Mutual recognition—Amendments by regulations 27 and 28, and by directions 25, 26(2) and 34, allow for mutual recognition of equipment meeting requirements in other European Union member states or in states which are contracting parties to the Agreement on the European Economic Area.

New signs and changes to signs—New diagrams for signs are prescribed, and amendments to prescribed signs (or to their meaning) are made, by regulations 21, 22, 23, 24, 26, 27, 28, 29, 33 and 34 and by the schedule to these amending regulations. Some diagrams are revoked. Consequential amendments are made by regulations 3(4), (6) and (7), 5, 7, 9, 12, 15, 16, 19(3)(a), 30 and 31, and by directions 4, 5(a), 7(a), 8(2), 9, 11, 12, 13, 14, 21, 22, 28, 29, 30, 32 and 33.

Offences—Regulation 5 amends the offences provisions in regulation 10 of the TSRGD 2002. The amendment means that section 36 of the Road Traffic Act 1988 applies to the new box junction markings shown in new diagrams 1044.1 and 1044.2. (Section 36 already applied to the existing box junction markings shown in diagrams 1043 and 1044.)

Parking—Amendments to provide for parking in relation to car clubs and to electric vehicles are made by regulations 30(9)(a), (20)(b) and (21)(a) and 31(7)(c), and by directions 4(b), 8(2)(b), 15 and 16. Amendments to provide for parking in relation to permit holders are made by regulations 30(20)(c) and (21)(b) and 31(4)(a)(ii), and by directions 3, 4(c) and (d), 5(a), 7(a), 8(4), 15(4), 16(4) and 18. Amendments to provide for a restricted parking zone are made by regulations 30(20)(a) and (c) and (21)(b) and 31(4)(a)(ii) and (7)(b), and by directions 3, 4(a) and (c), 5(a), 8(2)(a) and 18.

Permitted variants—Amendments to permitted variants for signs are made by regulations 8 and 30 (amends Schedule 16 to the TSRGD 2002) and in tables accompanying some diagrams.

Placing of signs—Directions 6, 8, 9, 10, 11, 12, 13, 14, 17, 19, 20, 21, 22, 23, 24, 29, 30, 31, 32 and 35 amend in relation to other placing of signs. These amendments include the revocation of the requirement for repeater signs to be placed at regular intervals (amendments to direction 11 of the TSRGD 2002 by direction 8 of this instrument).

Road markings—Regulations 6, 15, 16, 19 and 33, and directions 12, 13, 15, 16, 29 and 30, amend in relation to road markings. These include a new “cycle entry” marking (regulation 19 and new diagram 1001.2A). Also included are two new box junction markings.

Supplementary near side signals are provided for by amendments in regulations 3(4), (6) and (7), 21, 22 and 23 and in directions 32 and 35.

Traffic officers—Regulations 3(8), 13, 14, 17, 18 and 32(3) amend to make provision relating to traffic officers.

Updates—Regulations 27 and 28, and directions 19, 26(2) and 34(2), amend to update references.

Savings—Regulations 35 and 36 and direction 36 provide for savings so that certain signs that would otherwise not comply with the TSRGD 2002 as amended by this instrument can be used.

**Status:** *This is the original version (as it was originally made). This item of legislation is currently only available in its original format.*

This instrument was notified in draft to the European Commission in accordance with directive [98/34/EC](#) as amended by directive [98/48/EC](#). Copies of these directives may be obtained from The Stationery Office (<http://www.tso.co.uk> or <http://www.tsoshop.co.uk>). They are also available via the EUR-Lex website at [www.eur-lex.europa.eu](http://www.eur-lex.europa.eu).

A full impact assessment of the effect that this instrument will have on the costs of business and the voluntary sector is available on the Department for Transport website (<http://www.dft.gov.uk>) and is annexed to the Explanatory Memorandum which is published alongside the instrument on [www.legislation.gov.uk](http://www.legislation.gov.uk). (It concluded that there will be no effect on business or the voluntary sector.)