


SCHEDULE

New diagrams for insertion into the schedules to the 2002 regulations
Regulation 34(2)

PART 1

New diagrams for Schedule 1 to the 2002 regulations

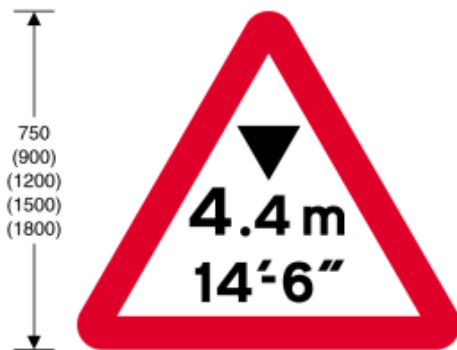

530A
Maximum headroom available at hazard, with height indicated in both metric and imperial units

Item	
1	Regulations: 17
2	Directions: 21
3	Diagrams: 530.1, 530.2, 572, 573
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, item 1




530.1
Reduced headroom over part of road due to overhanging building ahead

Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 530, 530A
4	Permitted variants: Schedule 16, items 3, 6, 11 "building" may be varied to "buildings" or "structure"
5	Illumination requirements: Schedule 17, item 8

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

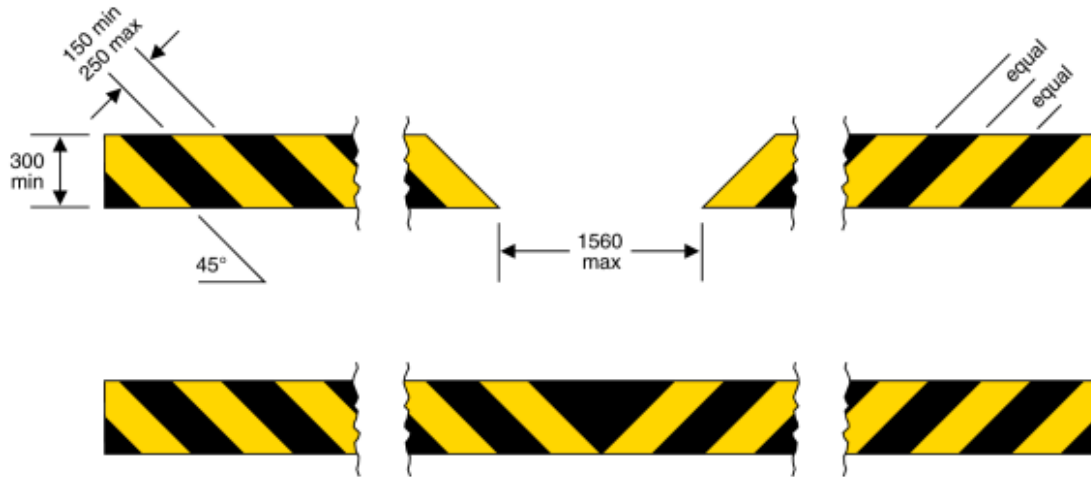


530.2
Reduced headroom at a hazard
(Alternative types)

Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 530, 530A, 629.2, 629.2A
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9 Where those parts of the sign coloured yellow are retroreflective they may also be fluorescent

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

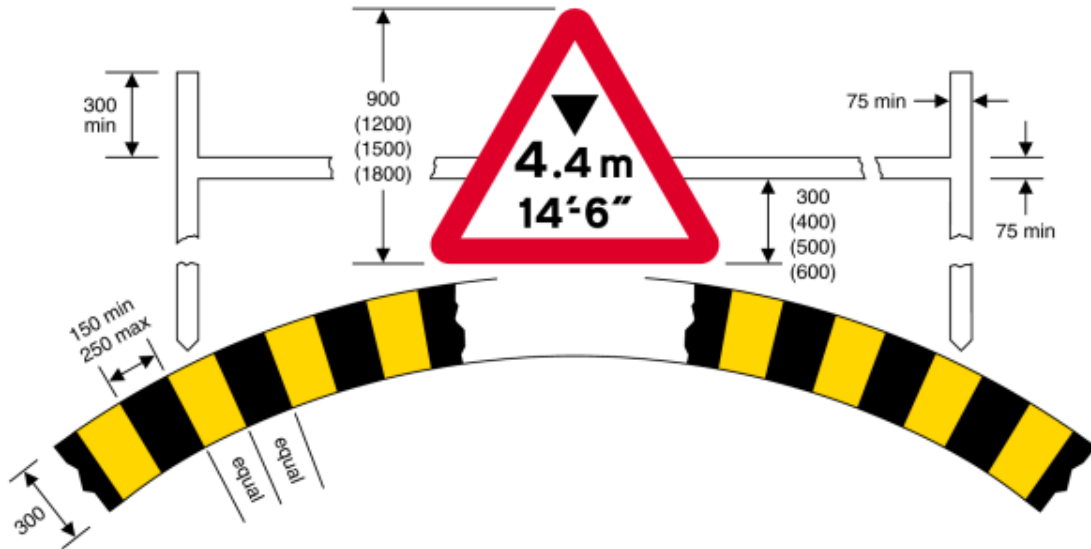


532.2A
Same as diagram 532.2

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1 Black and yellow markings may be omitted
5	Illumination requirements: Schedule 17, items 1, 9 Same as diagram 530.2

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

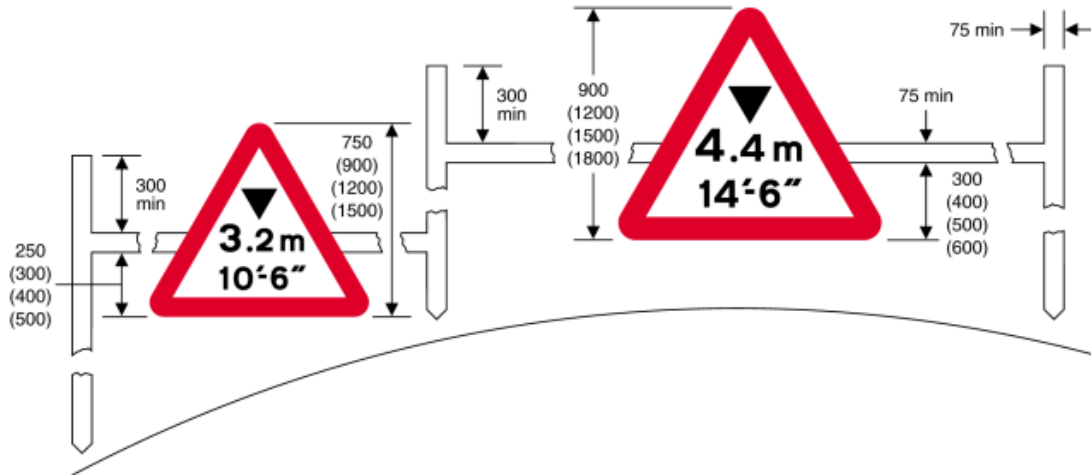


532.3A
Same as diagram 532.3

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1 Black and yellow markings shown in diagram 532.2A may be added
5	Illumination requirements: Schedule 17, items 1, 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)

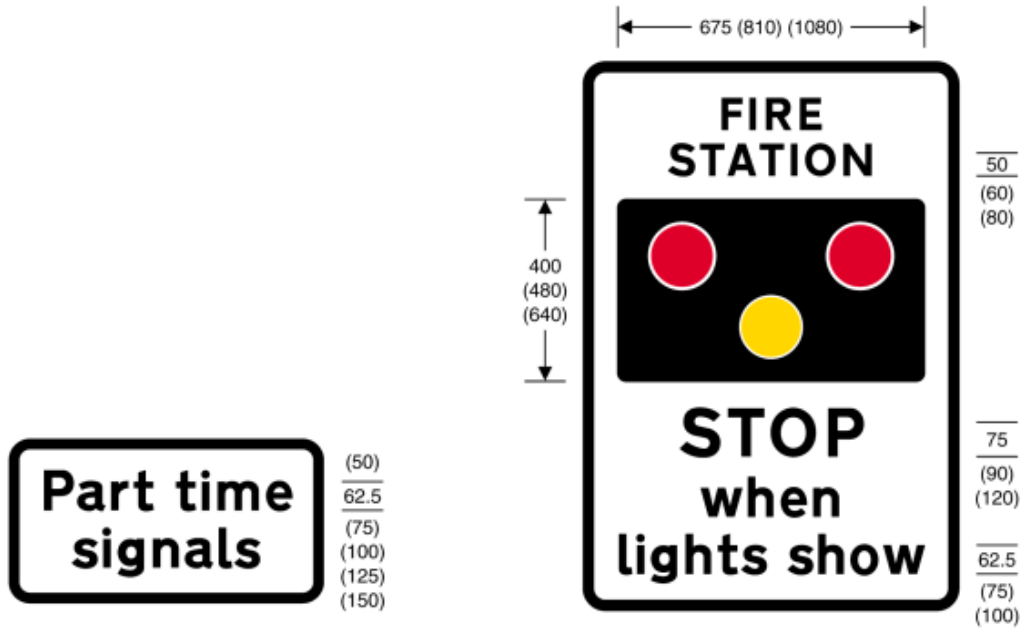

543.1
Traffic signals which only operate at certain times

563.1
Warning of light signals as shown in diagram 3014 ahead

Item	
1	Regulations: None
2	Directions: 21, 44A
3	Diagrams: 543, 3000, 3000.7, 3000.8, 3000.9, 3000.10
4	Permitted variants: Schedule 16, items 3, 6, 11 "Part time" may be varied to "Peak hour"
5	Illumination requirements: Schedule 17, items 4, 8

Item	
1	Regulations: None
2	Directions: 20, 21
3	Diagrams: 562
4	Permitted variants: Schedule 16, items 3, 6, 11 "FIRE" may be varied to: 1. "AMBULANCE" 2. "POLICE" 3. "FIRE AND AMBULANCE" 4. "FIRE AND POLICE" 5. "POLICE AND AMBULANCE" 6. "FIRE, POLICE AND AMBULANCE"
5	Illumination requirements: Schedule 17, item 8

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 1

New diagrams for Schedule 1 to the 2002 regulations (continued)



(50)
62.5
(75)
(100)
(125)
(150)
(200)

572
Distance ahead to hazard

Item	
1	Regulations: 17
2	Directions: 21
3	Diagrams: 504.1, 505.1, 506.1, 507.1, 508.1, 509.1, 510, 516, 517, 520, 521, 522, 523.1, 524.1, 528, 529, 529.1, 530, 530A, 531.1, 543, 544, 544.1, 544.2, 550.1, 552, 554, 555, 770, 771, 772, 782, 950, 7001, 7009
4	Permitted variants: Schedule 16, item 6
5	Illumination requirements: Schedule 17, item 8



(50)
62.5
(75)
(100)
(125)
(150)
(200)

573
Distance and direction to hazard


Item	
1	Regulations: None
2	Directions: 21
3	Diagrams: 523.1, 524.1, 528, 529, 529.1, 530, 530A, 531.1, 543, 544, 544.1, 544.2, 550.1, 552, 554, 555, 770, 771, 772, 782, 950, 7001, 7009
4	Permitted variants: Schedule 16, items 6, 9, 13
5	Illumination requirements: Schedule 17, item 8

Regulation 34(3)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations

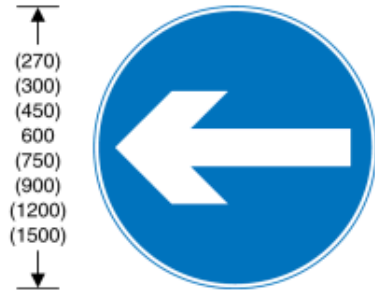


606
Vehicular traffic must proceed in the direction indicated by the arrow

Item	
1	Regulations: 10, 12, 47, 48, 49, 54
2	Directions: 7, 20, 21, 41, 44A
3	Diagrams: 515, 515.1A, 515.2, 607, 608, 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schedule 17, items 1, 6, 7



610
Vehicular traffic must comply with the requirements prescribed in regulation 15

Item	
1	Regulations: 10, 12, 14, 15, 26, 27, 54
2	Directions: 21, 41
3	Diagrams: 608
4	Permitted variants: Arrow may point downwards to the right
5	Illumination requirements: Schedule 17, items 1, 7




611
Vehicular traffic may reach the same destination by proceeding either side of the sign

Item	
1	Regulations: 12, 27
2	Directions: 41
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 7

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



612
No right turn for vehicular traffic

Item	
1	Regulations: 12, 17, 27, 47, 48, 49
2	Directions: 7, 21, 44A
3	Diagrams: 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6

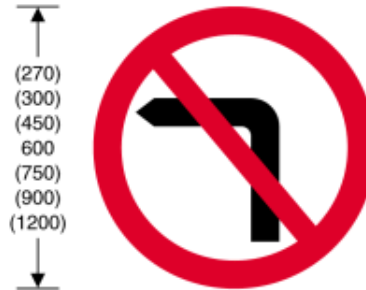


613
No left turn for vehicular traffic

Item	
1	Regulations: 12, 17, 27, 47, 48, 49
2	Directions: 7, 21, 44A
3	Diagrams: 954, 954.2, 954.3, 954.4, 954.5, 954.6, 954.7
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6



614
No U-turns for vehicular traffic

Item	
1	Regulations: 12
2	Directions: 7, 11, 21, 44A
3	Diagrams: 570, 645
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6

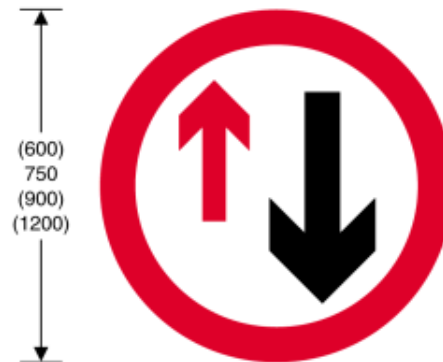


615
Priority must be given to vehicles from the opposite direction

Item	
1	Regulations: 10
2	Directions: 18, 19, 20, 21
3	Diagrams: 615.1, 645, 811, 1003, 1023, 1044.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

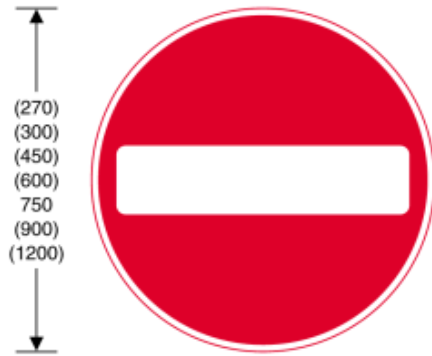

616
No entry for vehicular traffic

Item	
1	Regulations: 10, 12, 17, 27, 47, 48, 49, 54
2	Directions: 7, 8, 18, 21, 41, 44A
3	Diagrams: 954, 954.2, 1046, 1048.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 1, 6, 7




620
Vehicles requiring access to premises or land adjacent to the road are exempted from the prohibition conveyed by the associated sign

Item	
1	Regulations: 22
2	Directions: 7, 8, 21
3	Diagrams: 619, 619.1, 619.2, 622.1A, 622.5, 622.6, 622.7, 622.8, 629, 629A, 629.1, 952
4	Permitted variants: Schedule 16, item 38 "Except for access" may be omitted when a time period is added. "Except" shall be varied to "except" when preceded by a time period. "for access" may be varied to: <ol style="list-style-type: none"> 1. "for loading" 2. "for loading by" with the goods vehicle symbol shown in diagram 620.1 3. "permit holders" and an identification symbol where appropriate 4. The blue badge symbol shown in diagram 661A 5. "buses" 6. "local buses" 7. "taxis" 8. "for access to off-street premises" These variants may be used in any combination with each other and with "for access", except that 1 and 2 shall not be used together or with "for access", 8 shall not be used with "for access", and 5 and 6 shall not be used together. The word "and" shall be inserted before the last variant where more than one is used
5	Illumination requirements: Schedule 17, item 8

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)

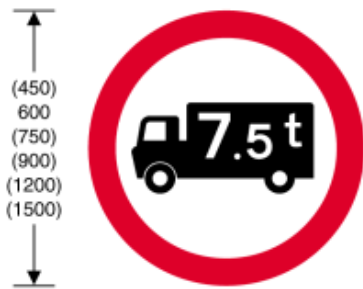

622.1A

Goods vehicles exceeding the maximum gross weight indicated on the goods vehicle symbol prohibited

Item	
1	Regulations: 17
2	Directions: 7, 8, 21
3	Diagrams: 554.3, 620
4	Permitted variants: "7.5t" may be varied to "18t"
5	Illumination requirements: Schedule 17, item 1

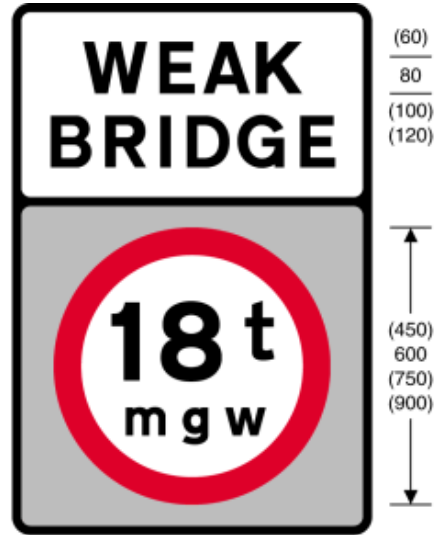

626.2A


Vehicles exceeding the maximum gross weight indicated prohibited from crossing the bridge or other structure

Item	
1	Regulations: 10, 17
2	Directions: 7, 8, 21
3	Diagrams: 627.1
4	Permitted variants: "18t" may be varied to "3t", "7.5t", "10t", "13t", "26t" or "33t". "BRIDGE" may be varied to "ROAD"
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

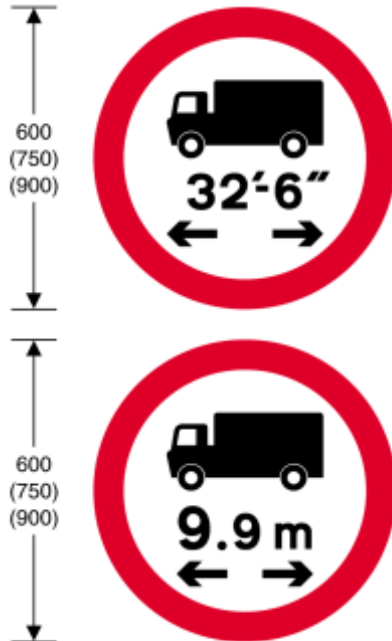

629.1


Vehicles or combinations of vehicles exceeding length indicated prohibited

Item	
1	Regulations: 17
2	Directions: 7, 8, 21
3	Diagrams: 554.3, 620, 954, 954.2
4	Permitted variants: Schedule 16, item 1 Metric sign may be omitted or placed to the right of the imperial sign
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

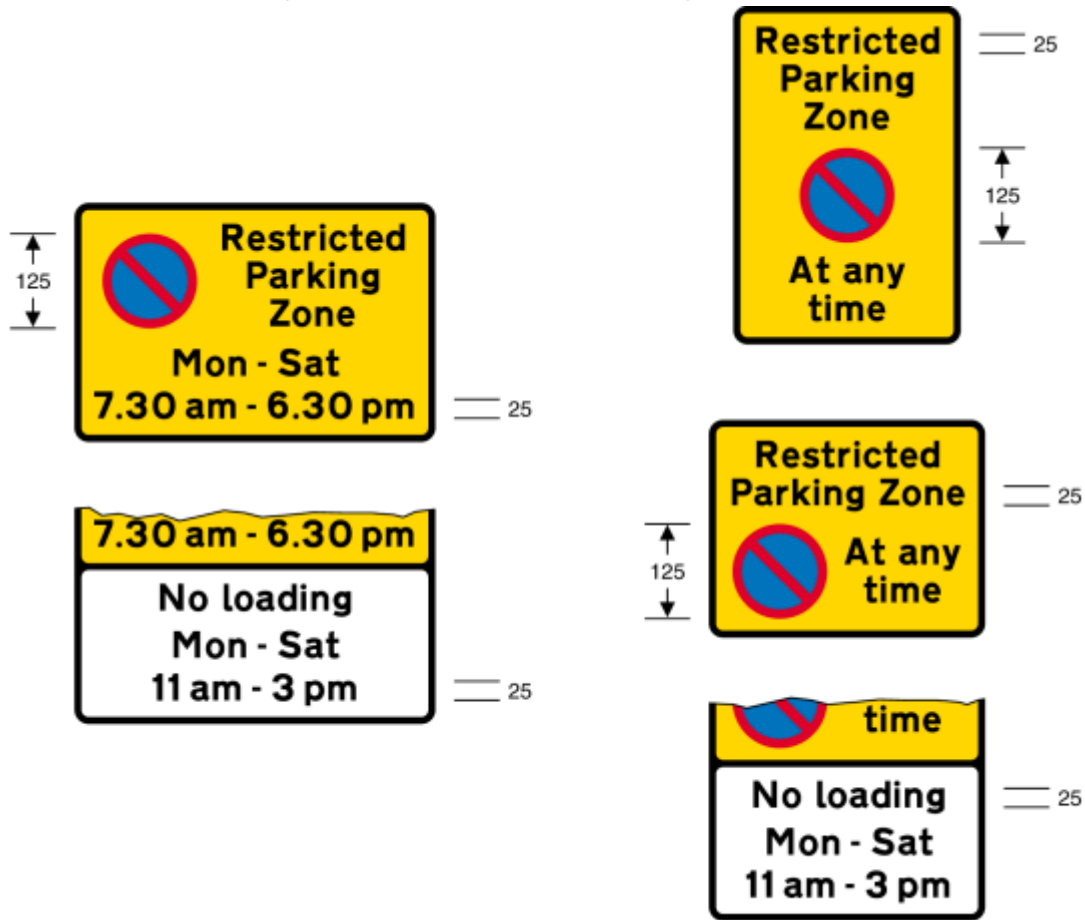

637.2A

Prohibition on waiting (and loading and unloading)
in a restricted parking zone
(Alternative types)

Item	
1	Regulations: None
2	Directions: 7, 11, 26A
3	Diagrams: 663.2
4	Permitted variants: Schedule 16, item 38 The panels indicating the prohibition of loading and unloading may be varied to diagram 638
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)



639.1B

Waiting prohibited during the periods indicated on the upper panel and restrictions on waiting during the period indicated on the lower panel

Item	
1	Regulations: 24
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 857.1, 1017, 1019, 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 The relative positions of the "no waiting" symbol and other legend in the upper panel may be as shown in diagram 639 or in the upper panel of diagram 640. The upper panel may be varied to diagram 650.2 or 650.3. The lower panel may be varied in a similar manner to diagram 661.1 or varied to diagram 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.9, 661A, 661.2A, 661.3A or 662. The sign shown in diagram 638.1 may be added as a middle panel with the size of the legend as shown for diagram 639.1B
5	Illumination requirements: Schedule 17, item 9

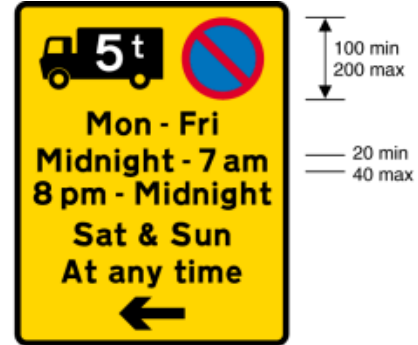

640.2A

Waiting by goods vehicles over maximum gross weight shown prohibited during the periods and in the direction indicated

Item	
1	Regulations: 4, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 14, 38 "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol. When the arrow points to the right the relative positions of the lorry or bus symbol and the no waiting roundel shall be reversed and the lorry or bus symbol (with a window substituted for the door) shall face to the right
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



660
Parking place reserved for permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 663.3, 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 "Permit holders only" may be varied to: 1. "Card holders only" 2. "Doctor permit holders only" 3. "Large or slow vehicles only" 4. "Business permit holders only" 5. "Resident permit holders only"
5	Illumination requirements: Schedule 17, item 9




660.3
Parking place reserved for holders of residents' permits

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 663.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 11, 38, 39 "Resident permit holders only" may be varied to: 1. "Permit holders only" 2. "Doctor permit holders only" 3. "Business permit holders only"
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

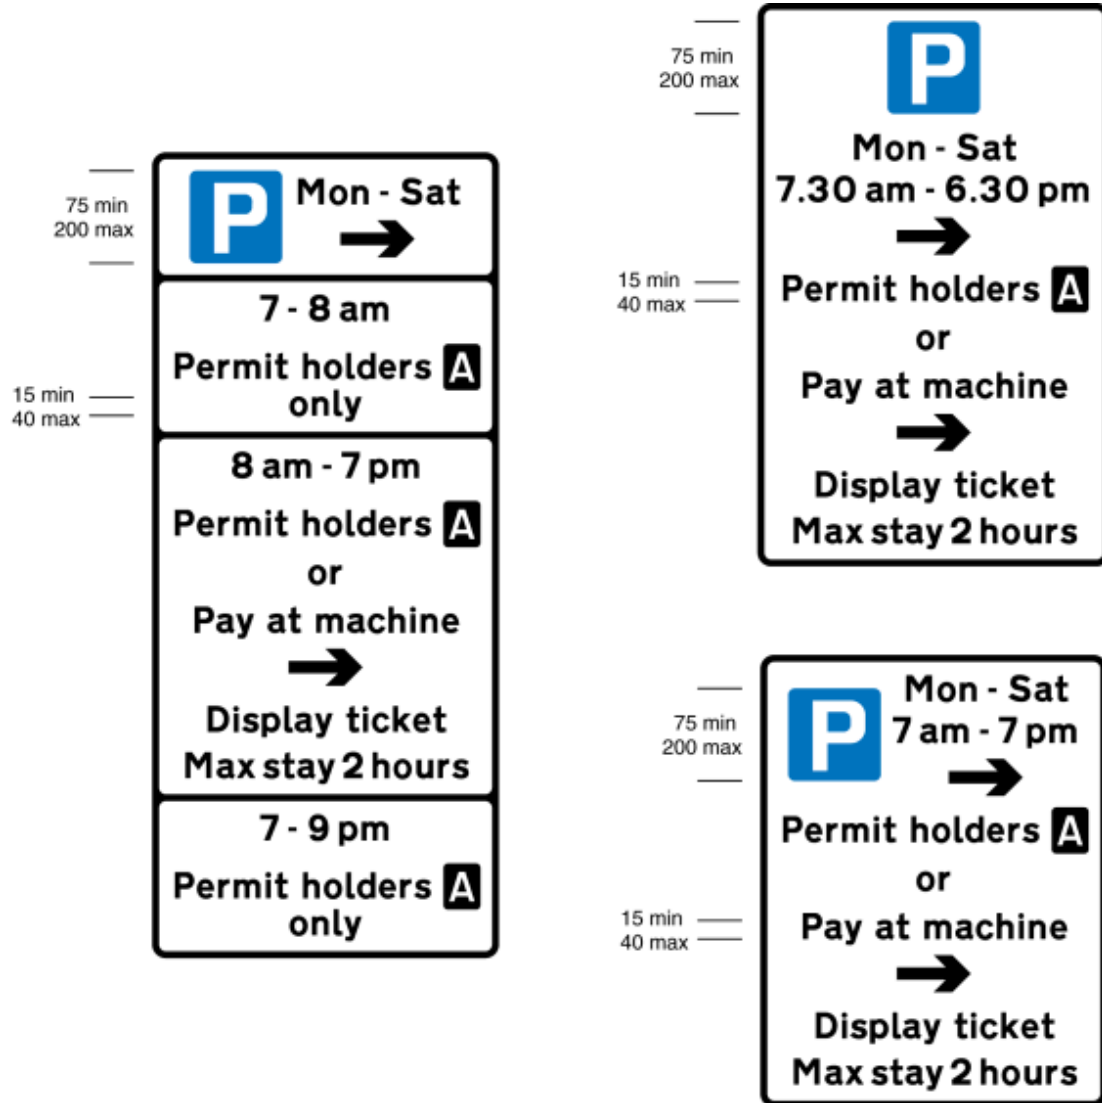

660.7

Parking place for permit holders with paid limited waiting permitted by others at specified times (Alternative types)

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 13, 14, 38, 39 Same as diagram 660.6. The arrow below the legend "Pay at machine" may be replaced by the legend "across road" or "opposite", or, when the arrow at the top of the sign is omitted, replaced by two horizontal arrows pointing in opposite directions
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



660.8

Parking place reserved for car club permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, item 11 The code letters and code numerals identifying the parking place may be varied as appropriate. The size of the code letters and code numerals and associated patch may be varied and may be in any contrasting colours. The name of the traffic authority may be added
5	Illumination requirements: Schedule 17, item 9



660.9

Parking place with facilities for charging electric vehicles reserved for permit holders

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 1028.3, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, item 11, 38, 39 The legend may be varied to "Electric vehicle recharging point only"
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



661.2A


'Pay and Display' ticket-regulated parking place

Item	
1	Regulations: None
2	Directions: 7, 11, 24, 25
3	Diagrams: 661.4, 1028.4, 1032, 1033
4	Permitted variants: Schedule 16, items 13, 38, 39 The arrow may be replaced by the legend "across road" or "opposite". A second arrow pointing in the opposite direction may be added
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

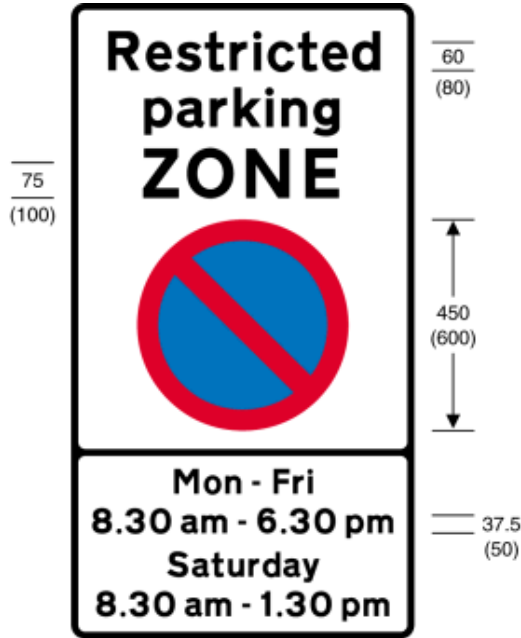

663.2
Entrance to a restricted parking zone

Item	
1	Regulations: None
2	Directions: 3, 7, 8, 26A
3	Diagrams: 637.2A
4	Permitted variants: Schedule 16, items 38, 39 The legend "No loading" may be added beneath the no waiting roundel. The lower panel shall be omitted where the restrictions apply at all times. The legend "except in signed bays" may be added beneath the time period shown in the lower panel. The legend in the lower panel may be varied to "Except in signed bays"
5	Illumination requirements: Schedule 17, item 4

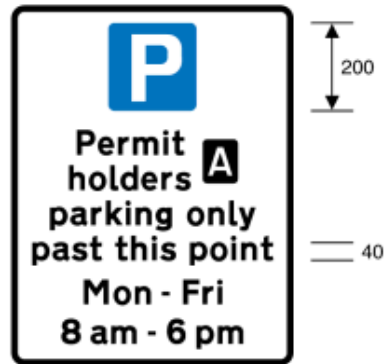


663.3
Entrance to a road or area where parking is reserved for permit holders during the period indicated and where parking bays have not been provided

Item	
1	Regulations: None
2	Directions: 3, 7, 8, 26A
3	Diagrams: 660, 660.3
4	Permitted variants: Schedule 16, items 38, 39 "Permit holders" may be varied to "Resident permit holders". The permit identifier may be placed to the right of the "P" symbol. The legend "past this point" may be varied to "in" and a street name
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)

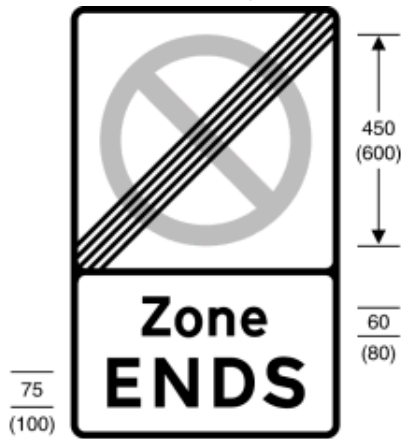

664

End of controlled, voucher or restricted parking zone

Item	
1	Regulations: None
2	Directions: 7, 10, 26A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



664.1


End of permit parking area

Item	
1	Regulations: None
2	Directions: 7, 10, 26A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2


New diagrams for Schedule 2 to the 2002 regulations (continued)

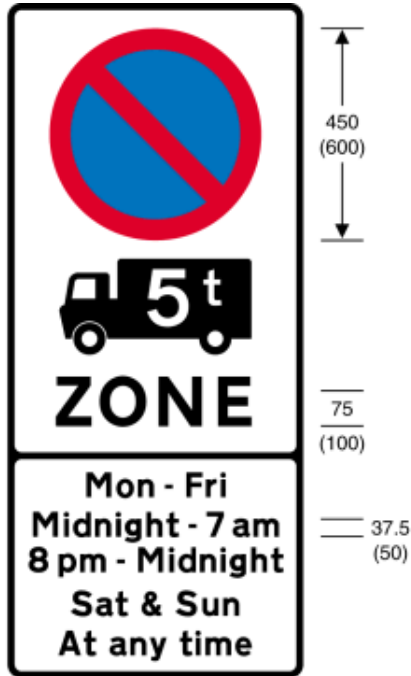

665

Entrance to a controlled parking zone applying to goods vehicles over maximum gross weight shown

Item	
1	Regulations: 4, 24
2	Directions: 7, 8, 26
3	Diagrams: None
4	Permitted variants: Schedule 16, item 38 "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	Illumination requirements: Schedule 17, item 4

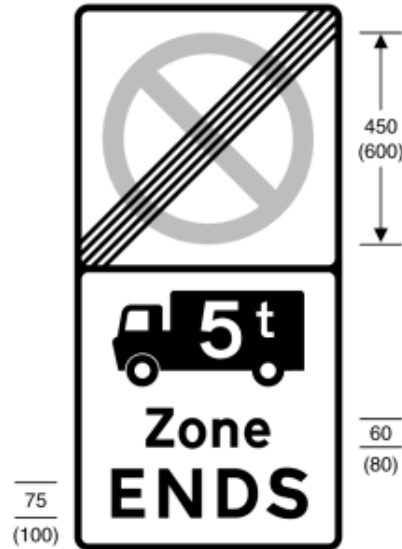

666


End of a controlled parking zone applying to goods vehicles over maximum gross weight shown

Item	
1	Regulations: 24
2	Directions: 7, 10, 26
3	Diagrams: None
4	Permitted variants: "5t" may be varied to "7.5t". The bus symbol shown in diagram 952 may be added below or substituted for the lorry symbol
5	Illumination requirements: Schedule 17, item 4


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 2

New diagrams for Schedule 2 to the 2002 regulations (continued)



671
National speed limits apply

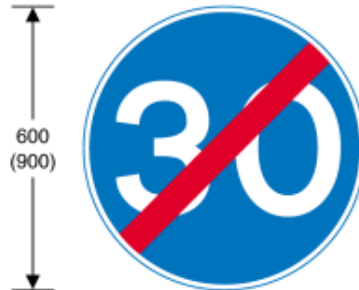

673
End of a minimum speed limit

Item	
1	Regulations: None
2	Directions: 7, 10, 11, 55A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 10, 11


Item	
1	Regulations: None
2	Directions: 7, 10
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, items 10, 11

Regulation 34(4)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE —PART 3

New diagrams for Schedule 3 to the 2002 regulations

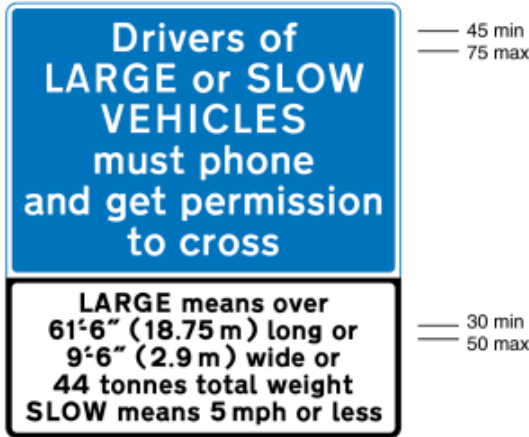

Item	
1	Regulations: 10, 16
2	Directions: None
3	Diagrams: 786, 787, 788
4	Permitted variants: "must phone" may be varied to "must use SOS phone"
5	Illumination requirements: Schedule 17, item 1


784.1

Drivers of large or slow vehicles must stop and telephone before using a railway or tramway level crossing



786

Place where large or slow, or long low vehicles should wait near a railway or tramway level crossing while the driver obtains permission by telephone to cross or confirms he has crossed

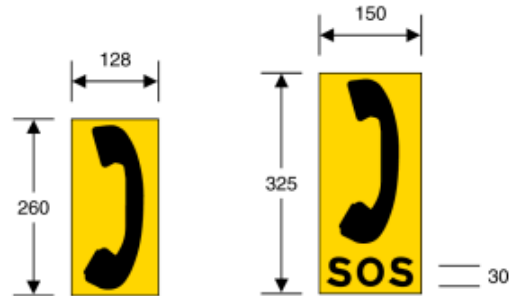

787

Site of emergency telephone or telephone at or near a railway or tramway level crossing (Alternative types)


Item	
1	Regulations: None
2	Directions: 7, 25
3	Diagrams: 782, 783, 784.1, 787, 788, 1028.3
4	Permitted variants: "AND USE PHONE" may be varied to "AND USE SOS PHONE" or "& USE SOS PHONE". "AT CROSSING" may be omitted
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: 783, 784.1, 786, 788
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 3

New diagrams for Schedule 3 to the 2002 regulations (continued)

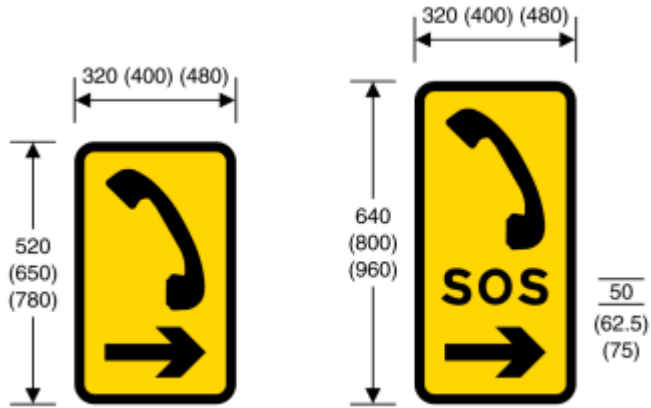

788

Direction to emergency telephone or telephone at or near a railway or tramway level crossing
(Alternative types)


Item	
1	Regulations: None
2	Directions: None
3	Diagrams: 783, 784.1, 786, 787
4	Permitted variants: Schedule 16, item 13
5	Illumination requirements: Schedule 17, item 4

Regulation 34(5)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations

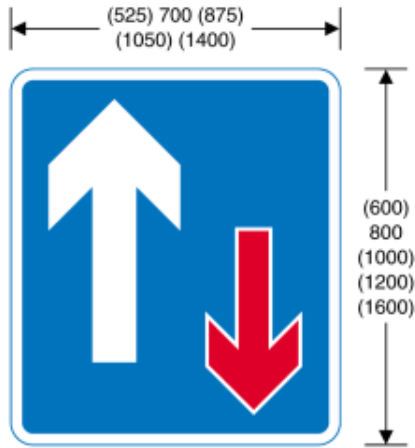

811
Traffic has priority over vehicles
from the opposite direction

Item	
1	Regulations: None
2	Directions: 18, 19, 20, 21
3	Diagrams: 615, 645, 811.1, 1044.2
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4




816.1
Alternative to the sign shown in diagram 816
with a street name plate

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The blue panel need not extend to the edge of the name plate. The black border may be omitted
5	Illumination requirements: Schedule 17, item 9


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)

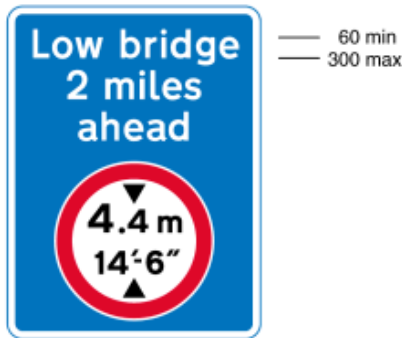

818.3
Same as diagram 818.2

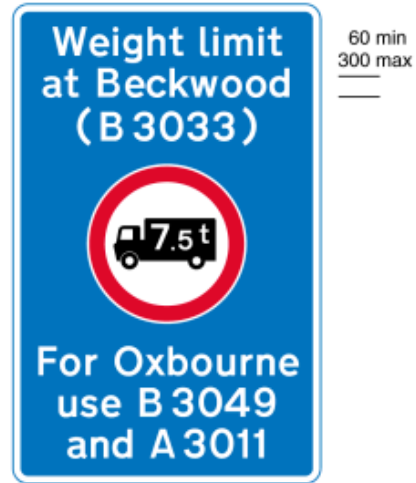

818.4
Nature and location of a prohibition, restriction or requirement with indication of alternative route

Item	
1	Regulations: 17
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 1, 6, 10 "ahead" may be varied to an arrow pointing horizontally to the left or to the right. "ahead" must be omitted when an arrow is included under item 10 of Schedule 16. "Low bridge" may be varied to "Height limit", "Weight limit", "Weak road", "Weak bridge", "Width limit", "Length limit" or omitted. The distance and any arrow shall be shown below the diagram 629.2A symbol when "Low bridge" is omitted. The diagram 629.2A symbol may be varied to diagram 622.1A (with the lorry symbol reversed as appropriate), 626.2A (prohibitory roundel only), 629, 629A, 629.1 (with the lorry symbol reversed as appropriate) or 629.2 as appropriate to accord with the prohibition
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 19, 20, 28 Same as diagram 622.1A. An arrow pointing horizontally to the left or to the right may be added above the diagram 622.1A symbol. "Weight limit" may be varied to "Weak road", "Weak bridge", "Width limit", "Length limit", "Height limit", "Low bridge" or omitted. The legend "at Beckwood (B 3033)" may be varied to an appropriate description or to a distance. "ahead" may be added after the distance when no arrow is shown. The legend "at Beckwood (B 3033)" may be omitted when an arrow is added. The diagram 622.1A symbol may be varied to diagram 626.2A (prohibitory roundel only), 629, 629A, 629.1 (with the lorry symbol reversed as appropriate), 629.2 or 629.2A as appropriate to accord with the prohibition. The legend below the diagram 622.1A symbol may be varied to "Alternative route follow" and either a symbol shown in Part VII of Schedule 13 or a description of the route, or varied to "Alternative route via" and a description of the route. The legend "For Oxbourne" may be varied to "Alternative route". The legend "B 3049 and A 3011" may be varied to a description of the route. When the sign is placed on a motorway, "use" and the route numbers may be varied to "leave at Junction" and the junction number, or "at Junction" and the junction number may be added after "use" and a route number; "Junction" may be varied to "J"
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)



60 min
300 max
—
—



(50)
62.5
(75)
(100)
(125)

818.5

Location of low bridge indicated by the sign shown in diagram 530, 530A, 532.2, 532.2A, 532.3 or 532.3A with indication of alternative route

820A

Road unsuitable for heavy goods vehicles

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 1, 6, 19, 20 An arrow pointing horizontally to the left or to the right may be added above the diagram 530A symbol. The legend "south of Maplebeck" may be varied to an appropriate description or to a distance. "ahead" may be added after the distance when no arrow is shown. The legend "south of Maplebeck" may be omitted when an arrow is added. The diagram 530A symbol may be varied to diagram 530. The legend below the diagram 530A symbol may be varied to "For" and a place name and an appropriate description of the route. "via" may be varied to "follow" or "use". "via A 123" may be varied to "follow" and a symbol shown in Part VII of Schedule 13. "A 123" may be varied to a description of the route. When the sign is placed on a motorway, the legend below the diagram 530A symbol may be varied to "For" and a place name and "leave at Junction" and the junction number, or varied to "For" and a place name and "use" and a route number "at Junction" and the junction number; "Junction" may be varied to "J"
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 11, 28 "heavy goods vehicles" may be varied to "HGVs". The legend may be omitted when an arrow is added to the sign
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 4


New diagrams for Schedule 4 to the 2002 regulations (continued)



829.6

Waiting place at a lay-by or observation platform for police or other authorised vehicles only

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "patrol" may be omitted. "Police patrol" may be varied to "Authorised"
5	Illumination requirements: Schedule 17, item 4

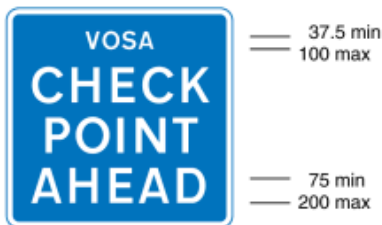

832.1B
Vehicle check point ahead

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "VOSA" may be varied to "GOODS VEHICLE" or to the name of, or acronym for the name of, the enforcement agency existing at the time of placing of the sign
5	Illumination requirements: Schedule 17, item 4



832.2B
Vehicle condition check point ahead

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: "VOSA" may be varied to the name of, or acronym for the name of, the enforcement agency existing at the time of placing of the sign
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 4

New diagrams for Schedule 4 to the 2002 regulations (continued)



878
Area in which cameras are used
to enforce traffic regulations
(Alternative types)


Item	
1	Regulations: 23
2	Directions: 32
3	Diagrams: 879
4	Permitted variants: "Traffic signal" may be varied to "Speed", "Traffic signal and speed", "Traffic enforcement", "Police", "Police enforcement" or "Bus lane". The legend may be varied to "Average speed check"
5	Illumination requirements: Schedule 17, item 4

Regulation 34(6)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations




951
Riding of pedal cycles prohibited

Item	
1	Regulations: None
2	Directions: 7, 8, 41
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 4, 7



954
Buses excluded from restriction or prohibition conveyed by associated sign

Item	
1	Regulations: 22
2	Directions: 7, 18, 21, 44A
3	Diagrams: 606, 609, 612, 613, 616, 629, 629A, 629.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



954.2
As diagram 954 applying to local buses

Item	
1	Regulations: 22
2	Directions: 7, 18, 21, 44A
3	Diagrams: 606, 609, 612, 613, 616, 629, 629A, 629.1, 952
4	Permitted variants: The legend may be on three lines
5	Illumination requirements: Schedule 17, item 8



954.3
Same as diagram 954 applying to buses and pedal cycles

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 609, 612, 613
4	Permitted variants: The word "local" may be added before "buses". "buses and cycles" may be varied to "buses, taxis and cycles", "buses, taxis & cycles" or "buses and taxis"
5	Illumination requirements: Schedule 17, item 8

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



954.4
Same as diagram 954 applying to pedal cycles

Item	
1	Regulations: None
2	Directions: 7, 21, 44A
3	Diagrams: 606, 609, 612, 613, 816
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8



954.5
As diagram 954 where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses" may be varied to "cycles"
5	Illumination requirements: Schedule 17, item 6



954.6
As diagram 954 applying to buses and pedal cycles where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses & cycles" may be varied to "local buses" or "buses & taxis"
5	Illumination requirements: Schedule 17, item 6




954.7
As diagram 954 applying to buses, taxis and pedal cycles where the signs are mounted in combination with light signals prescribed by regulation 33

Item	
1	Regulations: 22
2	Directions: 7, 21, 44A
3	Diagrams: 606, 612, 613
4	Permitted variants: "buses, taxis & cycles" may be varied to "local buses & cycles" or "local buses & taxis"
5	Illumination requirements: Schedule 17, item 6

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5


New diagrams for Schedule 5 to the 2002 regulations (continued)



955

Route for use by pedal cycles only


Item	
1	Regulations: None
2	Directions: 7, 8, 18, 21, 41
3	Diagrams: 1003, 1023, 1049, 1057, 2602.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 3, 7



956

Route for use by pedal cycles and pedestrians only

Item	
1	Regulations: None
2	Directions: 7, 8, 11, 18, 21, 41
3	Diagrams: 1003, 1023, 1049, 1057, 2602.3
4	Permitted variants: None
5	Illumination requirements: Schedule 17, items 3, 7



957


Route comprising two ways, separated by the marking shown in diagram 1049 or 1049.1 or by physical means, for use by pedal cycles only and by pedestrians only

Item	
1	Regulations: None
2	Directions: 7, 8, 11, 17, 18, 21, 33, 41
3	Diagrams: 1003, 1023, 1049, 1049.1, 1057, 2602.3
4	Permitted variants: The sign may be reversed in a mirror image
5	Illumination requirements: Schedule 17, items 3, 7

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5


New diagrams for Schedule 5 to the 2002 regulations (continued)

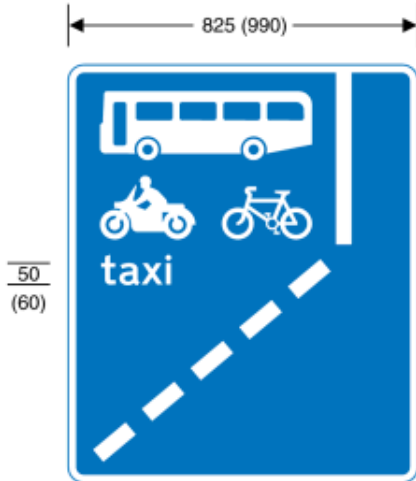

958A

With-flow bus lane which solo motor cycles, pedal cycles and taxis may also use ahead

Item	
1	Regulations: 23, 24
2	Directions: 7, 17, 21
3	Diagrams: 961, 1010
4	Permitted variants: The word "taxi" may be omitted. The bus symbol may be varied to the local bus symbol shown in diagram 958
5	Illumination requirements: Schedule 17, item 4

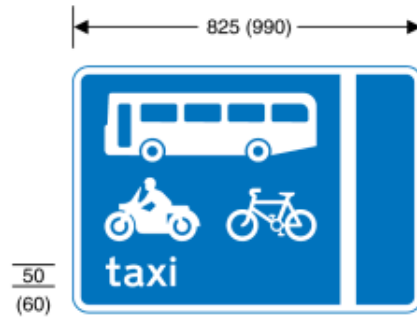

959A


With-flow bus lane which solo motor cycles, pedal cycles and taxis may also use
Note: Any vehicle may enter the bus lane to stop, load or unload where this is not prohibited

Item	
1	Regulations: 23, 24
2	Directions: 7, 11, 17, 18, 21
3	Diagrams: 961, 1048, 1049
4	Permitted variants: The word "taxi" may be omitted. The bus symbol may be varied to the local bus symbol shown in diagram 959
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)

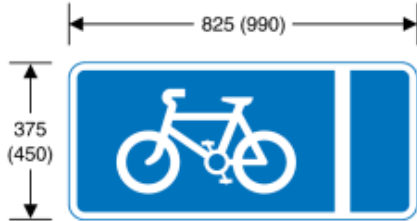


959.1
With-flow cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18, 21
3	Diagrams: 961, 1049, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

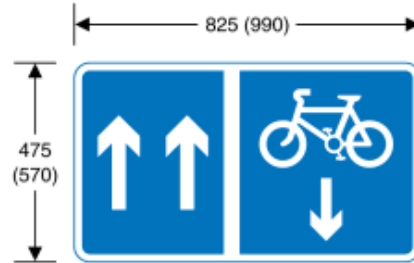


960.1
One-way traffic with contra-flow cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18
3	Diagrams: 1003, 1023, 1049, 1057
4	Permitted variants: Schedule 16, item 16
5	Illumination requirements: Schedule 17, item 4



960.2
One-way traffic with contra-flow pedal cycles

Item	
1	Regulations: None
2	Directions: 7, 11, 17, 18
3	Diagrams: 1004, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

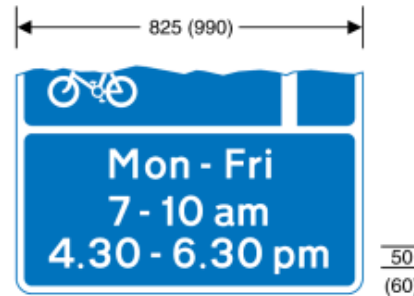

961
Times of operation of a bus lane or cycle lane

Item	
1	Regulations: None
2	Directions: 7, 11, 21
3	Diagrams: 958, 958A, 958.1, 959, 959A, 959.1
4	Permitted variants: Schedule 16, item 38
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



962.2

Contra-flow bus lane which pedal cycles may also use on road at junction ahead

Item	
1	Regulations: 23, 24
2	Directions: 7
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 14, 28 Where the arrow is omitted the word "lane" shall be varied to "lanes" and the symbols reversed to face the other way
5	Illumination requirements: Schedule 17, item 4



964

End of bus lane

Item	
1	Regulations: 23
2	Directions: 7, 10
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4



966

Pedal cyclists to rejoin main carriageway at the end of, or at a break in, a cycle track or route

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: The legend may be on three lines. "REJOIN CARRIAGEWAY" may be varied to "DISMOUNT"
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 5

New diagrams for Schedule 5 to the 2002 regulations (continued)



974
Stopping by vehicles other than buses prohibited during the period indicated

Item	
1	Regulations: 22, 29
2	Directions: 24, 25
3	Diagrams: 1025.1, 1025.3, 1025.4
4	Permitted variants: Schedule 16, item 38 "except buses" may be varied to "except local buses"
5	Illumination requirements: Schedule 17, item 4



975
Place where buses may stand and the stopping of other vehicles is prohibited during the period indicated


Item	
1	Regulations: 22, 29
2	Directions: 24, 25
3	Diagrams: 1025.1, 1025.3, 1025.4
4	Permitted variants: Schedule 16, item 38 Same as diagram 974
5	Illumination requirements: Schedule 17, item 4

Regulation 34(7)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations

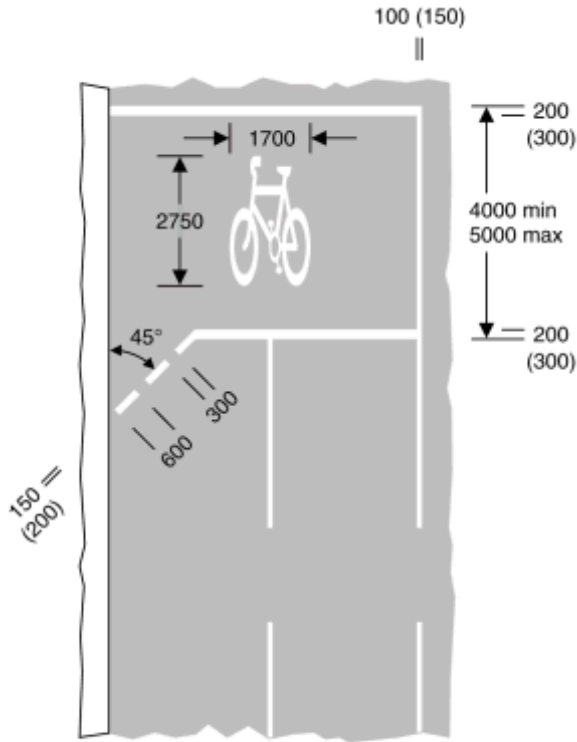

1001.2A


Alternative to the stop line shown in diagram 1001 showing a separate stop line at a junction for pedal cycles proceeding through the cycle entry

Item	
1	Regulations: 12, 31, 43
2	Directions: 18, 47
3	Diagrams: 3000, 3000.7, 3000.8, 3000.9, 3000.10
4	Permitted variants: The number of traffic lanes may be varied. The right hand longitudinal line may be omitted where that part of the carriageway is delineated by a raised kerb. The number of marks in the diagonal line may be varied
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

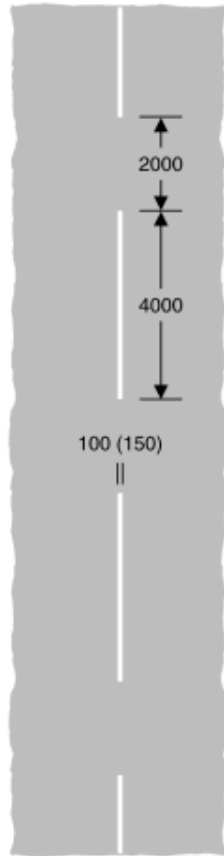

1004

Vehicular traffic should not cross or straddle the line unless it is safe to do so, and when the line is used in conjunction with a sign shown in diagram 960.2 or 967 motor vehicles should not enter a cycle lane unless that lane is clear of pedal cycles

Item	
1	Regulations: 4, 31
2	Directions: 18
3	Diagrams: 960.2, 967, 1001.2, 1057, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

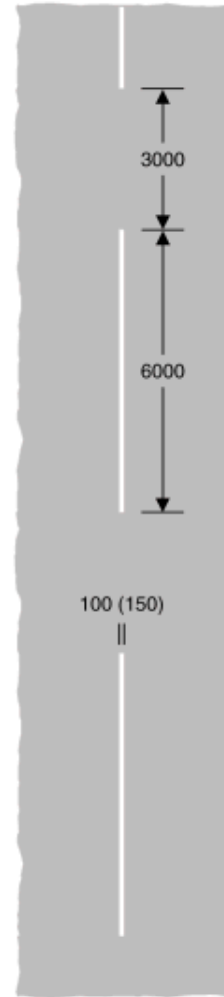

1004.1


Vehicular traffic should not cross or straddle the line unless it is safe to do so, and when the line is used in conjunction with the sign shown in diagram 967 motor vehicles should not enter a cycle lane unless that lane is clear of pedal cycles

Item	
1	Regulations: 4, 31
2	Directions: 18
3	Diagrams: 967, 1001.2, 1057
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

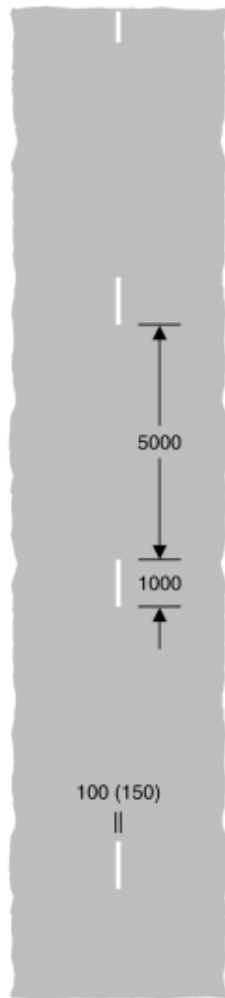

1005

Division of carriageway into traffic lanes on the part of the carriageway where vehicles normally proceed in the same direction other than at places where the marking shown in diagram 1004 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

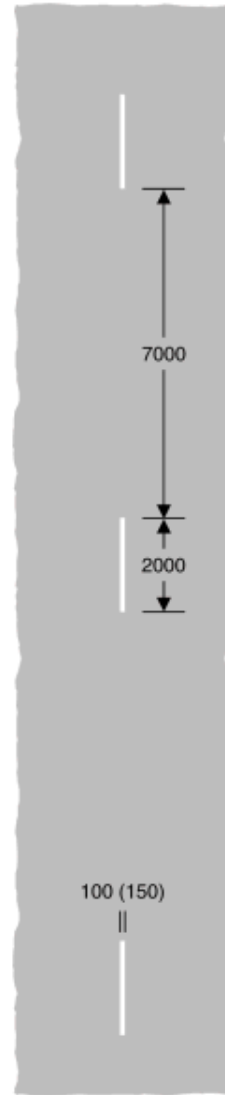

1005.1


As diagram 1005 other than at places where the marking shown in diagram 1004.1 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

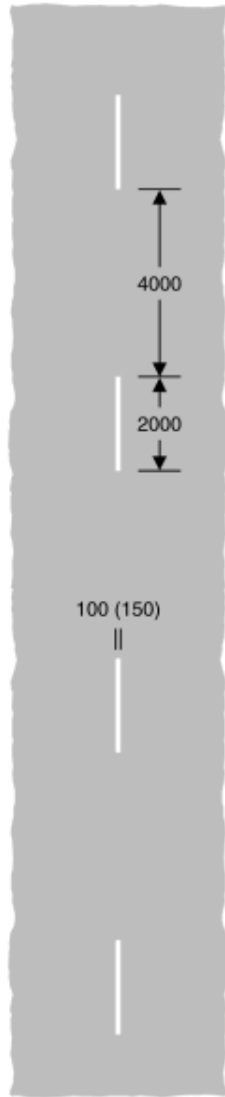

1008

Division between opposing flows of traffic on a carriageway other than at places where the marking shown in diagram 1004 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

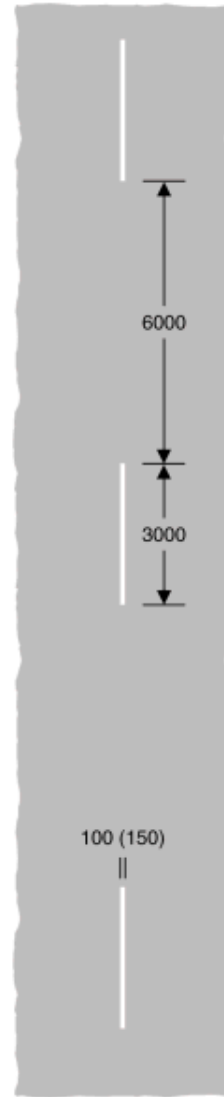

1008.1


As diagram 1008 other than at places where the marking shown in diagram 1004.1 is used

Item	
1	Regulations: 4, 31
2	Directions: None
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

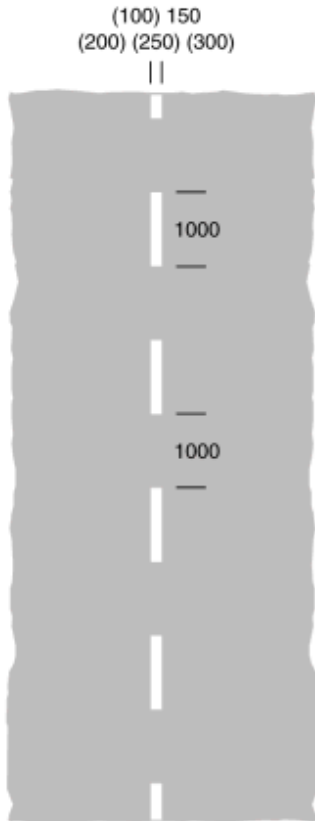

1010


- (a) Edge of the carriageway at a lay-by or at an exit from a private drive onto a public road; or
- (b) where laid diagonally across part of the carriageway, the start of a traffic lane, the boundary of which is indicated by diagram 1049; or
- (c) when used in conjunction with diagrams 1014 and 1024.1, the most suitable path to be taken by high vehicles under a low bridge or to avoid an overhanging structure; or
- (d) when laid alongside rails used by tramcars, the edge of the part of the carriageway used by the tramcars; or
- (e) the division between the main carriageway and a traffic lane which leaves the main carriageway at a junction ahead; or
- (f) the boundary between the main carriageway and either a diverging or merging traffic lane at a road junction; or
- (g) the boundary between an emergency refuge area and an actively managed hard shoulder

Item	
1	Regulations: 4, 31
2	Directions: 17, 18
3	Diagrams: 508.1, 509.1, 958, 958A, 1014, 1024.1, 1049
4	Permitted variants: An audible or tactile warning in the form of a raised rib may be incorporated in the manner shown in diagram 1012.2 into the white parts of the marking when it is used to delineate the boundary between an emergency refuge area and an actively managed hard shoulder. The ribs on an individual white mark shall be 250 millimetres apart
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

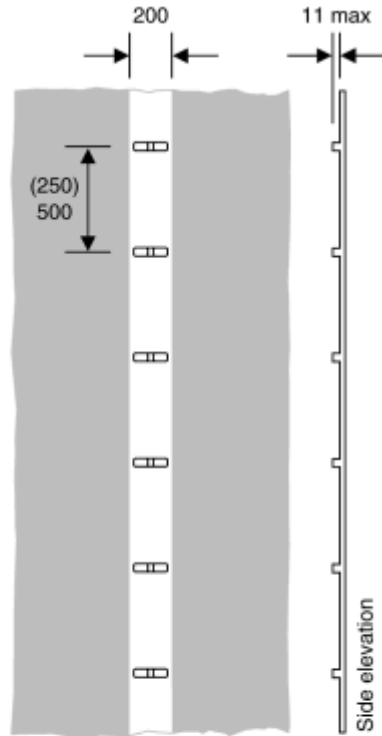

1012.2

- (a) Edge of the carriageway of a motorway other than at a junction with a slip road; or
- (b) the back edge of an actively managed hard shoulder;


and, in both cases, incorporating an audible and tactile warning

Item	
1	Regulations: 11, 31, 32
2	Directions: 14
3	Diagrams: None
4	Permitted variants: The notch may be omitted from the raised rib. The width of the line shall be 150 millimetres when it is used to delineate the back edge of an actively managed hard shoulder
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

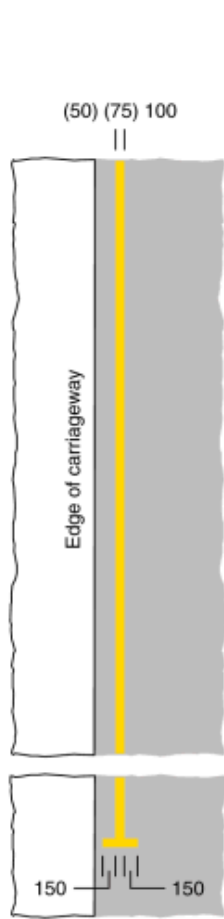

1017

Waiting of vehicles on a side of a length of road prohibited for a time less than that specified in caption (a) to diagram 1018.1

Item	
1	Regulations: 4
2	Directions: 3, 7, 18, 22, 24, 25
3	Diagrams: 637.2, 639, 639.1B, 640, 650.3, 663, 663.1, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

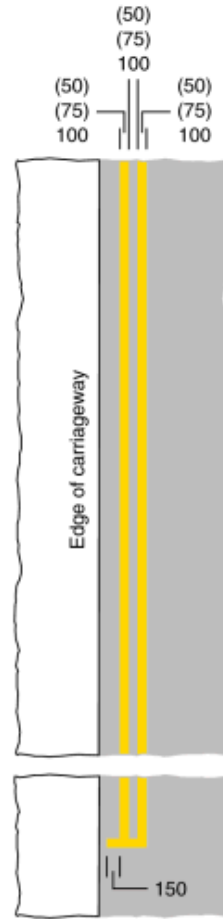

1018.1

(a) Waiting of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months; or


(b) Stopping of vehicles in a lay-by prohibited except in emergency

Item	
1	Regulations: 4
2	Directions: 3, 7, 18, 22, 24, 25
3	Diagrams: 637.2, 637.3, 640, 642.3, 650.3, 663, 663.1, 1062
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

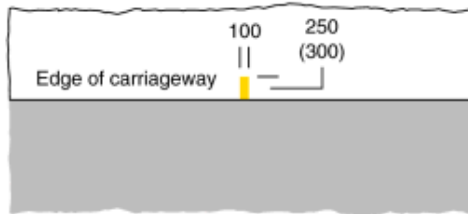

1019
Loading and unloading of vehicles on a side of a length of road prohibited for a time less than that specified in the caption to diagram 1020.1

Item	
1	Regulations: 4
2	Directions: 3, 7, 23, 24, 25
3	Diagrams: 637.2, 638.1, 639.1B, 640, 663, 663.1
4	Permitted variants: The marking may be continued down the vertical face of a kerb at the edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

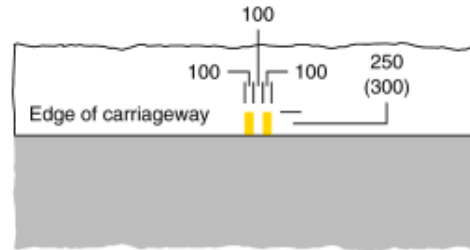


1020.1
Loading and unloading of vehicles on a side of a length of road prohibited at any time during a period of at least 4 consecutive months

Item	
1	Regulations: 4
2	Directions: 3, 7, 23, 24, 25
3	Diagrams: 637.2, 638, 640, 663, 663.1
4	Permitted variants: Same as diagram 1019
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

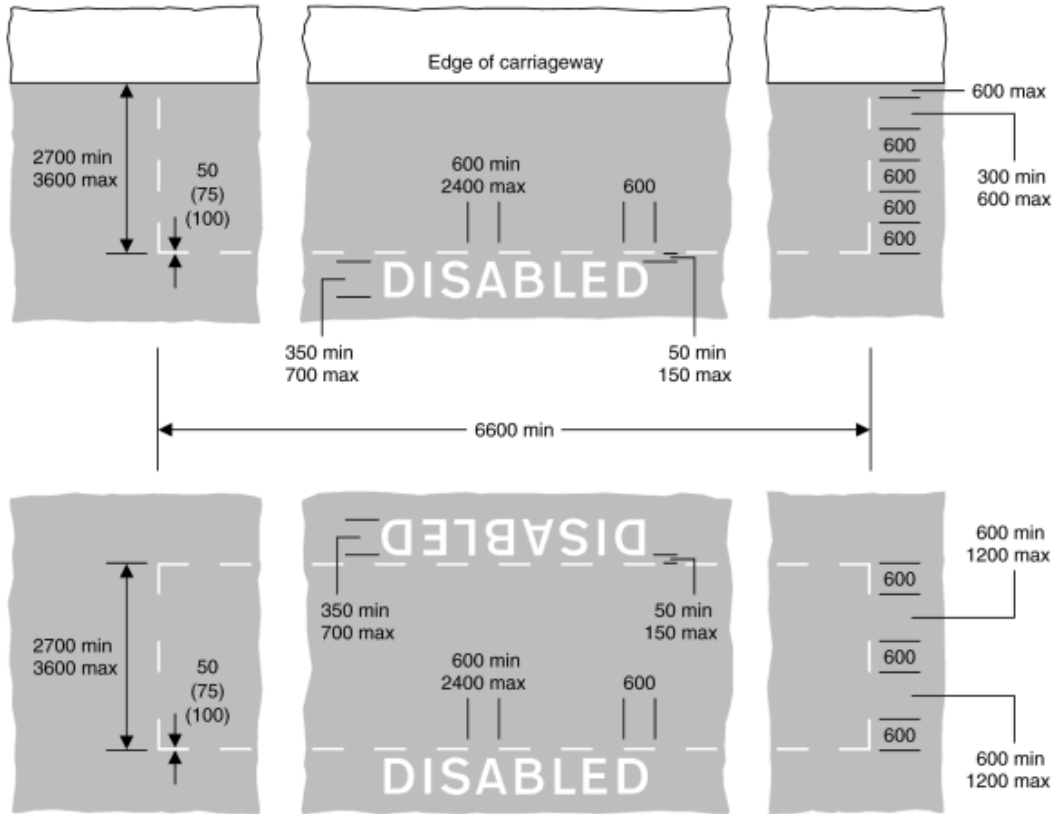

1028.3


Alternative types of parking bays reserved for disabled badge holders either at the edge or in the centre of the carriageway (Longitudinal marking)

Item	
1	Regulations: 12, 22
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.4, 660.8, 660.9, 661A, 661.1, 786, 801 (when used with 804.1), 969
4	<p>Permitted variants: The number of times the word "DISABLED" is shown may be varied according to the length of the marking. "DISABLED" may be omitted or varied to:</p> <ol style="list-style-type: none"> 1. "BUSES" 2. "LARGE OR SLOW VEHICLES ONLY" 3. "LOADING ONLY" 4. "CAR CLUB ONLY" 5. "CAR CLUB" 6. "ELECTRIC VEHICLES ONLY" 7. "ELECTRIC VEHICLES" 8. "ELECTRIC VEHS ONLY" 9. "ELECTRIC VEHS" <p>The minimum width of a bay reserved for disabled badge holders at the edge of the carriageway shall be 1800 millimetres in a case where, on account of the nature of the traffic using the road, the overall width of the carriageway is insufficient to accommodate a wider bay. In such a case, or where the width of the bay is 2700 millimetres, the transverse marking shall be the same as the transverse marking in the edge of carriageway version of diagram 1028.4. The transverse line may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb</p>
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

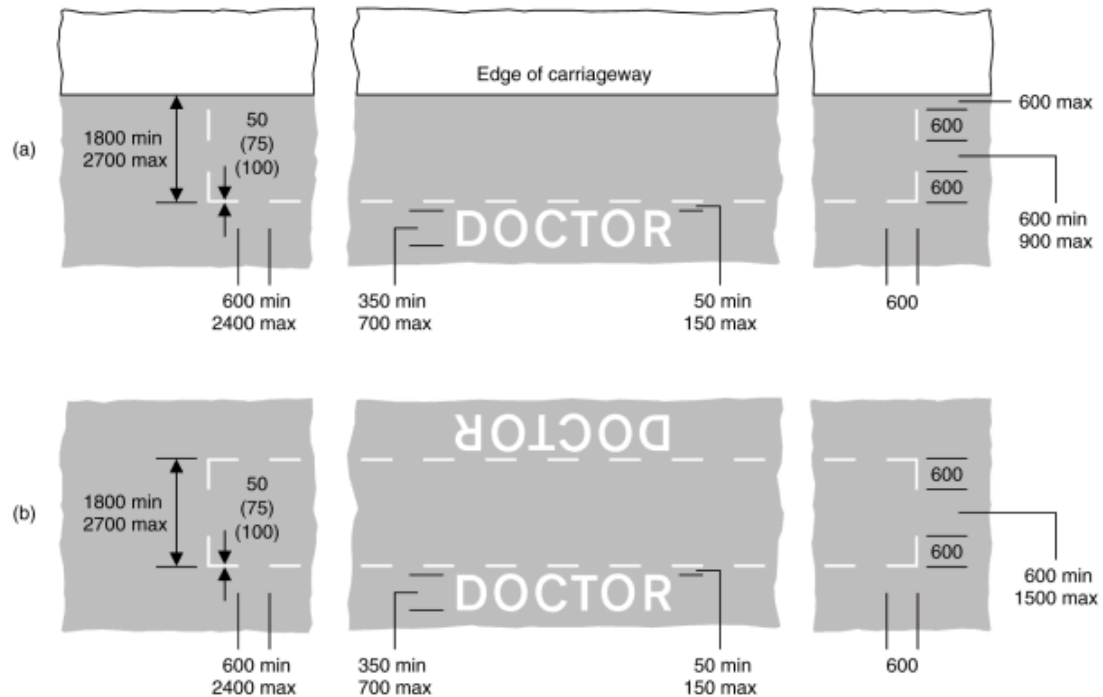

1028.4

Alternative types of parking bays reserved for doctor permit holders

- (a) at the edge of the carriageway and situated wholly on either the carriageway or the footway; or
- (b) in the centre of the carriageway or partly on the carriageway and partly on the footway


(Longitudinal marking)

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.5, 660.6, 660.7, 660.8, 660.9, 661.1, 661.2A, 661.3A, 662, 663.1, 667, 667.1, 668, 668.1, 801
4	<p>Permitted variants: The number of times the word "DOCTOR" is shown may be varied according to the length of the marking. "DOCTOR" may be omitted or varied to:</p> <ol style="list-style-type: none"> 1. "SOLO MOTORCYCLES ONLY" 2. "SOLO M/CYCLES ONLY" 3. "SOLO M/CS ONLY" 4. "PERMIT HOLDERS ONLY" 5. "CAR CLUB ONLY" 6. "CAR CLUB" 7. "ELECTRIC VEHICLES ONLY" 8. "ELECTRIC VEHICLES" 9. "ELECTRIC VEHS ONLY" 10. "ELECTRIC VEHS" <p>The transverse line may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb. When the marking is placed wholly or partly on the footway any legend shall be placed only on the carriageway side of the bay</p>
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

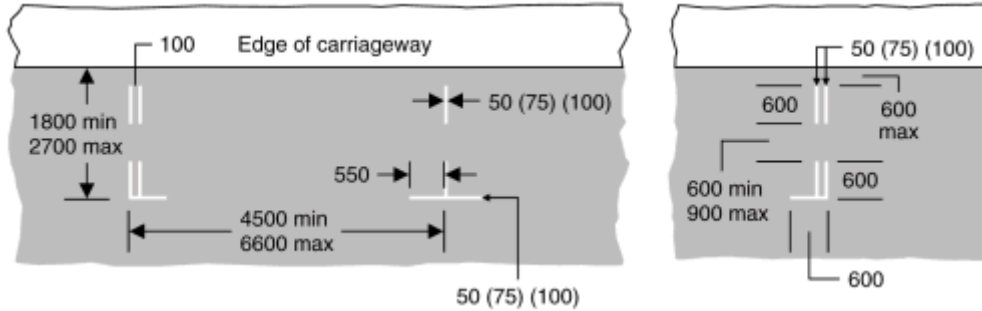

1032


Parking bay marked with individual parking spaces
(Longitudinal marking)

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.8, 660.9, 661A, 661.1, 661.2A, 661.3A, 662, 663.1, 801
4	Permitted variants: The number of individual parking spaces may be extended as necessary. The double transverse lines are only to be used at the end of a block of parking spaces and may be omitted when the marking is placed in a lay-by or where the end of the bay is delineated by a raised kerb. Two adjacent parking spaces may be combined into a single space by omitting the transverse line between them and giving a maximum length of space of 13200 millimetres. The words "DOCTOR", "DISABLED", "LOADING ONLY", "CAR CLUB ONLY", "CAR CLUB", "ELECTRIC VEHICLES", "ELECTRIC VEHS ONLY" or "ELECTRIC VEHS" may be added in the manner shown in diagram 1028.4. The minimum length of a parking space reserved for disabled badge holders shall be 6600 millimetres. The width of such a space shall be 2700 millimetres but this may be reduced to a width not less than 1800 millimetres in a case where, on account of the nature of the traffic using the road, the overall width of the carriageway is insufficient to accommodate a wider bay
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

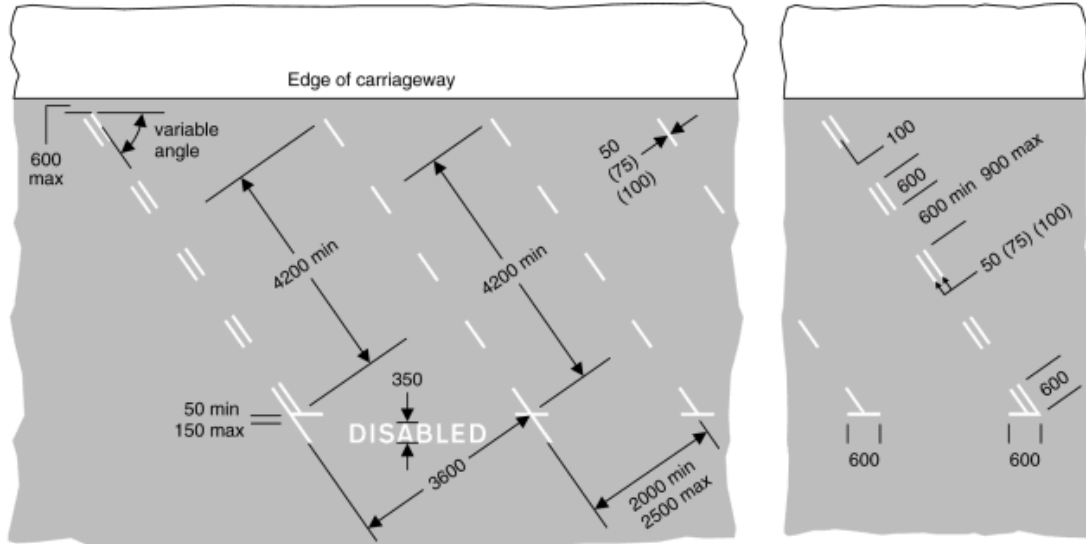

1033


Echelon parking spaces subject to such conditions, if any, as may be in force

Item	
1	Regulations: 12
2	Directions: 7, 24, 25
3	Diagrams: 639.1B, 660, 660.3, 660.4, 660.5, 660.6, 660.7, 660.8, 660.9, 661A, 661.1, 661.2A, 661.3A, 662, 663.1, 801
4	Permitted variants: "DISABLED" and the associated bay may be omitted. Additional "DISABLED" bays may be provided. The words "DOCTOR" or "CAR CLUB" may be added. The marking may be omitted along that part of a bay which is delineated by a raised kerb
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

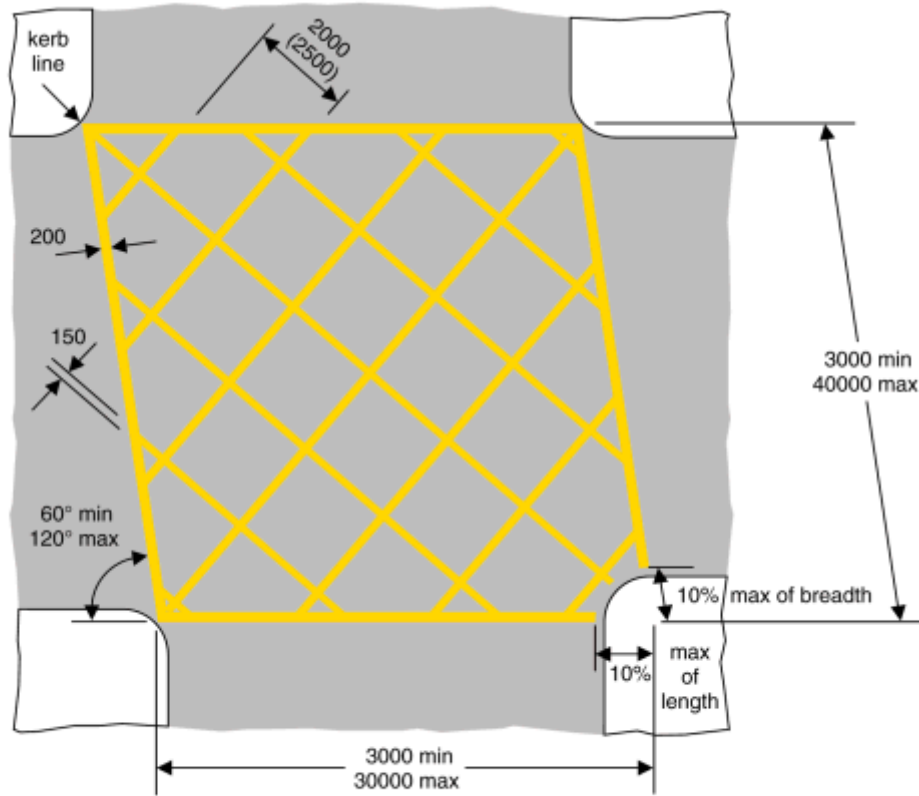

1043


Marking conveying the requirements prescribed by regulation 29(2) and Part II of Schedule 19 and which extends across the full width of the carriageway

Item	
1	Regulations: 10, 12, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: Any corner may be cut away as shown. The cut-away corner may be completed in the same manner as the other corners. Parts of the marking shall be omitted where tram rails cross the marking. Parts of the marking may be omitted to indicate the edge of the path taken by a tramcar and, where parts of the marking are so omitted, the remaining parts shall be bounded by a continuous yellow line
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

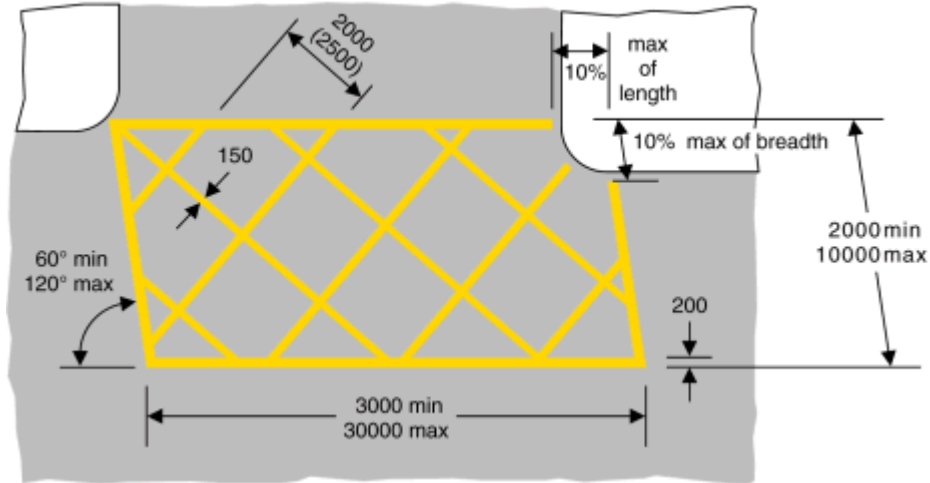

1044


As diagram 1043 where the marking extends across part of the width of the carriageway

Item	
1	Regulations: 10, 12, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: Same as diagram 1043
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

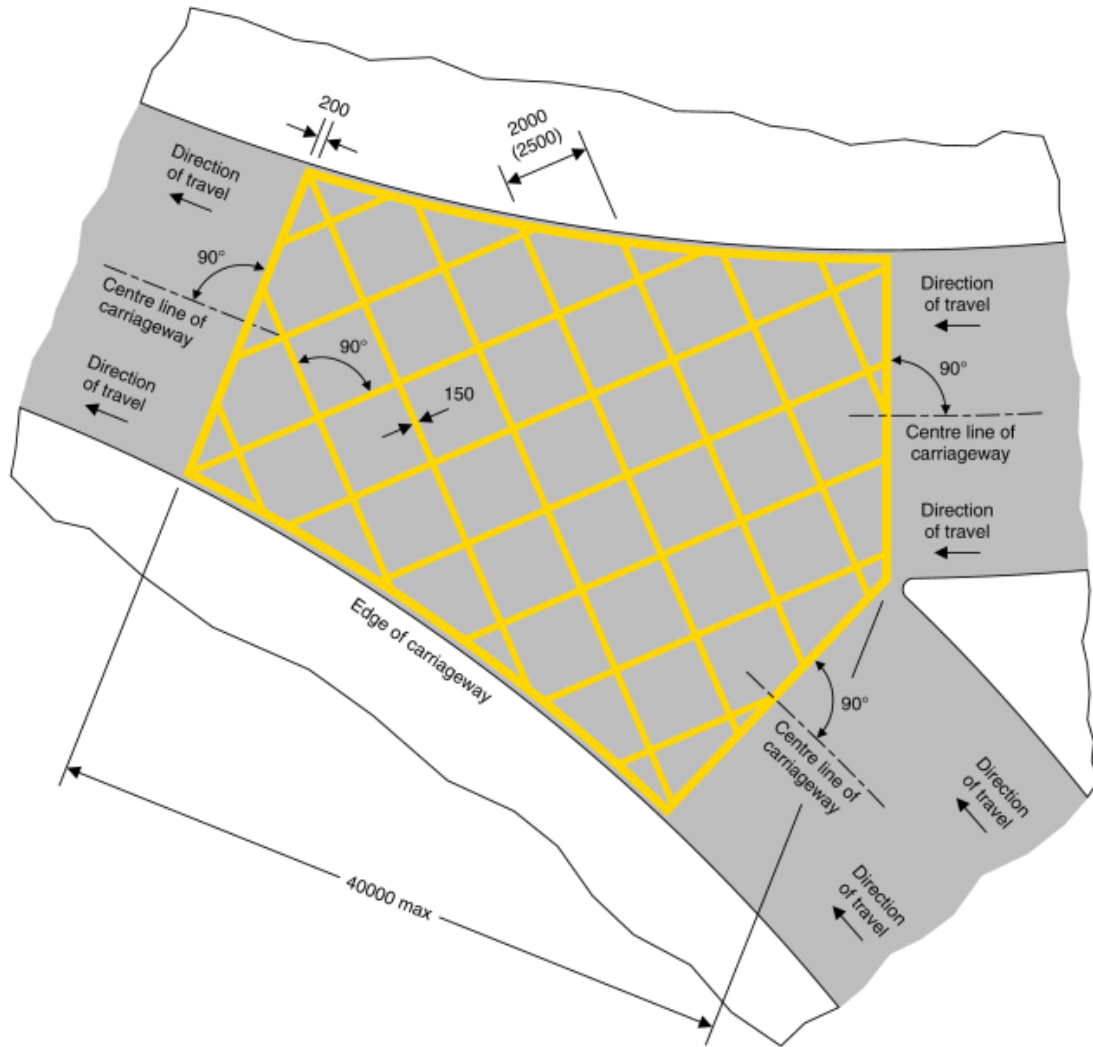

1044.1


Marking conveying the requirements prescribed by regulation 29(2) and Part II of Schedule 19 when placed on an area of carriageway at a gyratory system or roundabout

Item	
1	Regulations: 10, 29
2	Directions: 35
3	Diagrams: None
4	Permitted variants: The width and shape of the marking may be varied, but only in a manner such that the longitudinal boundaries of the marking are adjacent to each edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

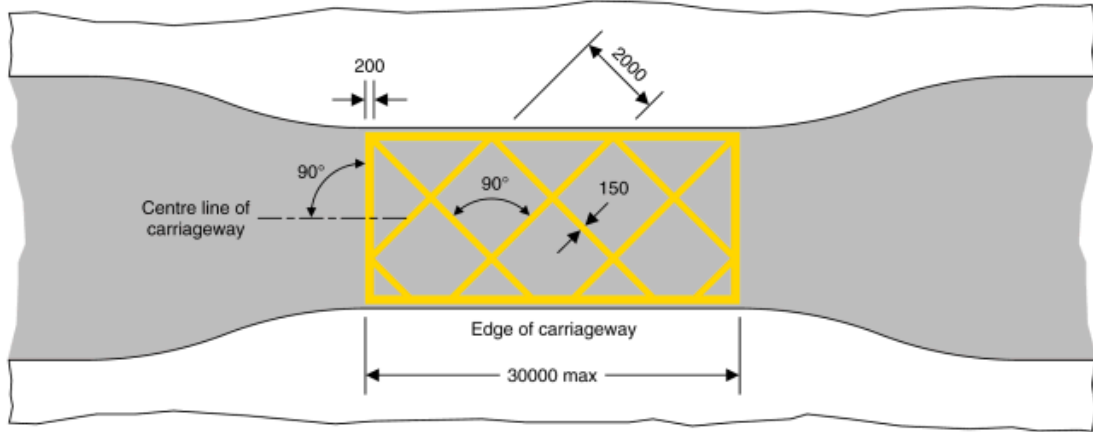

1044.2


Marking used in conjunction with signs shown in diagrams 615 and 811 conveying the requirements of regulation 29(2) and Part II of Schedule 19

Item	
1	Regulations: 10, 29
2	Directions: 18, 35
3	Diagrams: 615, 811
4	Permitted variants: The width and shape of the marking may be varied, but only in a manner such that the longitudinal boundaries of the marking are adjacent to each edge of the carriageway
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6

New diagrams for Schedule 6 to the 2002 regulations (continued)

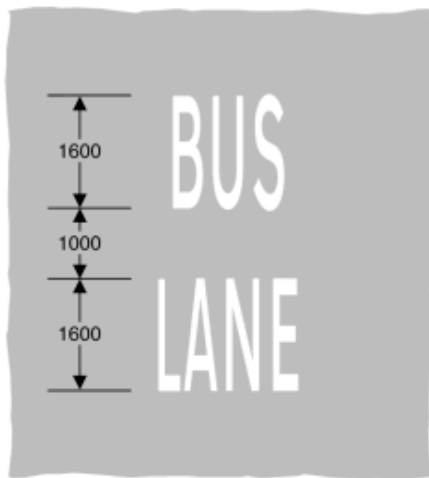

1048

With-flow lane reserved for buses and other vehicles as indicated on the sign shown in diagram 959 or 959A, or a contra-flow lane reserved for buses

Item	
1	Regulations: 22, 23
2	Directions: 7, 17, 18
3	Diagrams: 959, 959A, 960, 1049
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12



1049


Boundary of a bus lane, cycle lane, other designated lane, cycle track or route used by pedal cycles and pedestrians only. Where used in conjunction with the sign shown in diagram 957, the division of a route into that part reserved for pedal cycles and that part reserved for pedestrians

Item	
1	Regulations: 4, 31
2	Directions: 7, 17, 18, 33
3	Diagrams: 955, 956, 957, 959, 959A, 959.1, 960, 960.1, 1010, 1014, 1048, 1048.1, 1050, 1057, 1058
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 12

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 6


New diagrams for Schedule 6 to the 2002 regulations (continued)

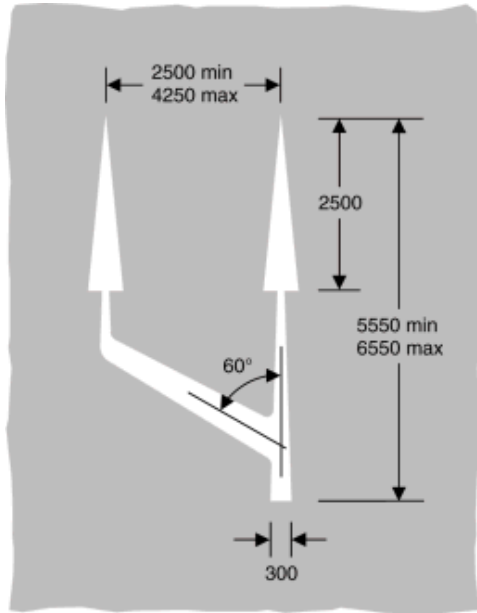

1050

Direction of possible traffic movements at the end of a bus lane or other designated lane, or where there is an intermediate discontinuation of the lane on the approach to a junction

Item	
1	Regulations: 12
2	Directions: 7, 18
3	Diagrams: 1049
4	Permitted variants: The left hand arrow head may indicate a left turn in the manner shown in diagram 1036.1
5	Illumination requirements: Schedule 17, item 12

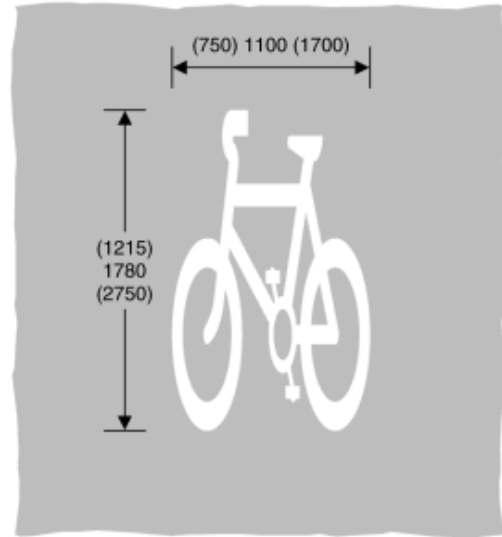

1057

Cycle lane, track or route


Item	
1	Regulations: None
2	Directions: 17, 18
3	Diagrams: 955, 956, 957, 959.1, 960.1, 960.2, 965, 967, 1001.2, 1003, 1004, 1004.1, 1023, 1049, 1049.1, 1058, 1059, 2601.2, 2602.2
4	Permitted variants: Schedule 16, item 28
5	Illumination requirements: Schedule 17, item 12

Regulation 34(8)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations

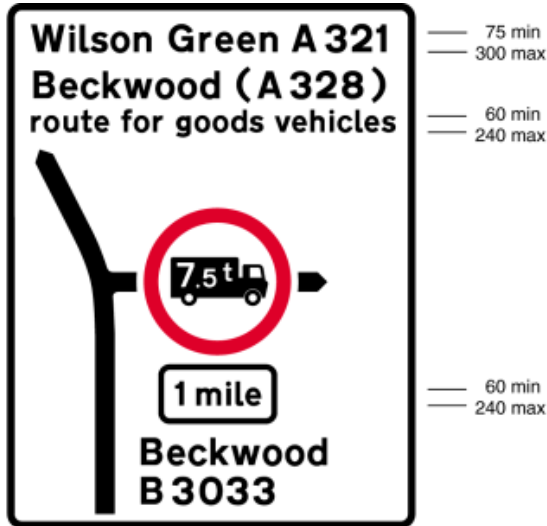

Item	
1	Regulations: 17
2	Directions: 7, 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 18, 19, 20, 21, 22, 24, 25, 26, 27, 28, 30, 31, 32, 34, 35, 36, 37
5	Illumination requirements: Schedule 17, item 4

2108

Junction ahead of two non-primary routes, on one of which there is a weight restriction, and the other is the alternative route to avoid the weight restriction



Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 The LPG fuel, picnic area, "i" and bed symbols may be omitted as appropriate. "Puddleworth" shall be varied to another geographical name as appropriate
5	Illumination requirements: Schedule 17, item 4

2310.2

Distance ahead to a named motorway service area located on a road that is not a motorway at which fuel, parking, toilets and refreshments are available, and a picnic area, overnight accommodation, LPG fuel and a Tourist Information Point or Centre may be available, 24 hours a day throughout the year
(Sign on primary or non-primary route)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2313.1

Distance ahead to services at which fuel, parking, restaurant facilities and toilets are available for all vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day



2313.2

Direction to services at which fuel, parking, light refreshments and toilets are available for all vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The cup symbol (denoting light refreshments) shown in diagram 2313.2 may be substituted for the spoon and fork symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.2 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The spoon and fork symbol (denoting restaurant) shown in diagram 2313.1 may be substituted for the cup symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2313.3

Distance ahead to services not open for 24 hours but where fuel, parking, light refreshments and toilets are available for all vehicles at least between 8 am and 8 pm on every day except Christmas Day, Boxing Day and New Year's Day

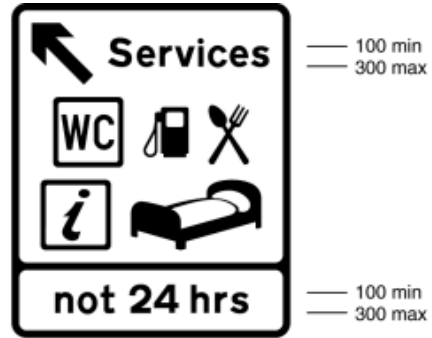

2313.4

Direction to services not open for 24 hours but where fuel, parking, restaurant facilities and toilets are available for all vehicles at least between 8 am and 8 pm on every day except Christmas Day, Boxing Day and New Year's Day


Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The spoon and fork symbol (denoting restaurant) shown in diagram 2313.4 may be substituted for the cup symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.4 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The cup symbol (denoting light refreshments) shown in diagram 2313.3 may be substituted for the spoon and fork symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7


New diagrams for Schedule 7 to the 2002 regulations (continued)

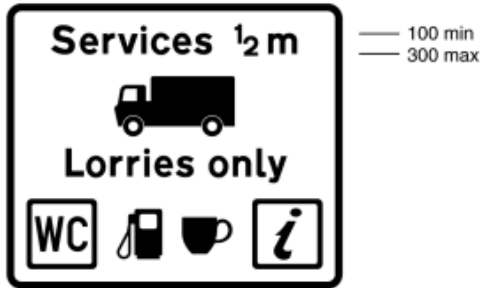

2313.5

Distance ahead to services at which fuel, parking, light refreshments and toilets are available for goods vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: 17
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 "Services" may be varied to a geographical name and "services". The lorry symbol shall be varied to the lorry symbol with the red bar shown in diagram 2313.6 and the words "Lorries only" omitted where facilities are provided for vehicles other than goods vehicles. The spoon and fork symbol (denoting restaurant) shown in diagram 2313.6 may be substituted for the cup symbol. The bed symbol (denoting hotel or other overnight accommodation) shown in diagram 2313.6 may be added. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The tourist information "i" symbol shall be omitted where this facility is not provided. The phrase "not 24 hrs" shall be added in a panel at the bottom of the sign as shown in diagram 2313.3 where the services are not open for 24 hours but where the facilities are available between at least 8 am and 8 pm. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

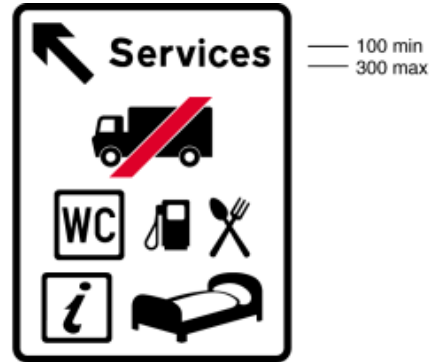

2313.6

Direction to services at which fuel, parking, restaurant facilities and toilets are available for vehicles other than goods vehicles at all times on every day except Christmas Day, Boxing Day and New Year's Day

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 28 "Services" may be varied to a geographical name and "services". The lorry symbol shown in diagram 2313.5 and the words "Lorries only" shall be substituted for the lorry symbol with the red bar where the facilities provided are primarily for heavy goods vehicles. The cup symbol (denoting light refreshments) shown in diagram 2313.5 may be substituted for the spoon and fork symbol. The symbol for LPG fuel shown in diagram 2310.2 may be added except that it shall be coloured black on a white background. The bed and tourist information "i" symbols shall be omitted where these facilities are not provided. The phrase "not 24 hrs" shall be added in a panel at the bottom of the sign as shown in diagram 2313.4 where the services are not open for 24 hours but where the facilities are available between at least 8 am and 8 pm. The phrase "not 24 hrs" shall be varied to "Fuel only 24 hrs" when fuel only is available at all times except Christmas Day, Boxing Day and New Year's Day
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



CAPITAL LETTER HEIGHT
70 min



CAPITAL LETTER HEIGHT
35 min

CAPITAL LETTER HEIGHT
70 min



60 min
250 max

2402.1
Name of a town or village commencing immediately ahead (Alternative types)

2502
Distance to a commercial vehicles parking place ahead with public toilets and telephones

Item	
1	Regulations: None
2	Directions: 13, 42
3	Diagrams: None
4	Permitted variants: Schedule 16, item 19 "Welcome to" may be omitted or varied to a similar phrase. The legend "City of" or "Welcome to the City of" may precede the place name. "Please drive carefully" may be omitted or varied to "Thank you for driving carefully" or another road safety message of not more than five words. When "Welcome to" is omitted, a phrase denoting an item of local geographical or historical interest may be added above the place name and may be in the style of "Market town of" or other appropriate description of not more than five words. The relative sizes of lettering on different parts of the sign may be varied provided the place name remains the most prominent feature
5	Illumination requirements: Schedule 17, item 9

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 10, 11, 28 The lorry or "WC" or telephone symbol may be omitted. The recycling centre symbol shown in diagram 2139 may be added. The "i" symbol shown in diagram 2313.1 may be added where the parking place includes a general information point not associated with tourist attractions
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2505

Directions to different types of parking place from a junction ahead

Item	
1	Regulations: 13, 17, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	<p>Permitted variants: Schedule 16, items 3, 6, 12, 16, 28, 31, 34, 38 The permitted variants shown below apply to each parking place indicated on the sign.</p> <p>The name or location of the parking place may be added. One of the following legends may be used or the legend may be omitted:</p> <ol style="list-style-type: none"> 1. "Free" 2. "Shoppers" 3. "Commuters" 4. "Long stay" 5. "Short stay" 6. "Pay and display" 7. "Multi-storey" <p>No more than two of the following symbols may be shown:</p> <ol style="list-style-type: none"> 1. Pedal cycle shown in diagram 968 2. Bus shown in diagram 969 3. Goods vehicle shown in diagram 804.1 4. Car shown in diagram 804.2 5. Caravan drawn by a car shown in diagram 804.3 6. Motor cycle shown in diagram 804.4 7. Tourist information "I" shown in diagram 2313.1 <p>The total number of spaces in the parking place may be indicated in white figures in the bottom right hand corner of the "P" symbol as shown in diagram 2506.</p> <p>The "Park Mark" symbol may be added to the "P" symbol in the manner shown in diagrams 2511.1 and 2512.1 to indicate a secured car park approved by the police under the "Park Mark" safer parking scheme.</p> <p>One of the following variable legends may be displayed in red or green characters in the manner shown in diagram 2509.1:</p> <ol style="list-style-type: none"> 1. "FULL" 2. "CLOSED" 3. "SPACES" <p>One of the following variable legends may be displayed in white, off-white or yellow characters on a black background:</p> <ol style="list-style-type: none"> 1. "FULL" 2. "CLOSED" 3. "SPACES" 4. The number of available spaces at any one time <p>The arrow symbols may be omitted when "FULL" or "CLOSED" is displayed</p>
5	<p>Illumination requirements: Schedule 17, item 4</p> <p style="text-align: right;">59</p>

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2509.1

Directions to several alternative parking places with an indication of the availability of parking spaces at each one (Variable message sign)

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 16, 19, 28, 31, 34, 38 Same as diagram 2505 except in respect of the indication of the total number of spaces in the "P" symbols shown in the top panel. The right hand "P" symbol in the top panel may be omitted. The top panel or both "P" symbols in the top panel may be omitted and the "P" symbol added to each of the other panels. "Long stay" or "Short stay" may be added to or substituted for either "Town centre" in the top panel or the geographical names in the other panels. The legends "SPACES" and "FULL" are interchangeable and may be varied to "CLOSED" or to the number of available spaces at any one time. The variable legend shall be displayed in the colours described in diagram 2505. The arrow may be omitted when all parking places indicated in that direction are shown as either "CLOSED" or "FULL"
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2511.1

Direction to a secured car park approved by the police under the "Park Mark" safer parking scheme

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 12, 28, 31, 34, 38 Same as diagram 2505. The "P" symbol and the "Park Mark" symbol may be arranged in the manner shown in diagram 2511.1
5	Illumination requirements: Schedule 17, item 4



2512.1

Same as diagram 2511.1

Item	
1	Regulations: 13, 19, 24
2	Directions: 13, 56
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28, 31, 34, 38 Same as diagram 2505. The "P" symbol and the "Park Mark" symbol may be arranged in the manner shown in diagram 2511.1
5	Illumination requirements: Schedule 17, item 4



2601.1


Directions of numbered routes for pedal cycles forming part of a national cycle route network at a junction ahead

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 16, 19, 20, 28, 34 The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. When the cycle symbol faces to the right, any route number shall be placed to the left of the cycle symbol. The cycle symbol and route number may be placed alongside the destination in the manner shown in diagram 2602.1. The pedestrian symbol shown in diagram 2605 (reversed as appropriate) may be added to the left of the route number when the cycle symbol faces to the right and to the right of the route number when the cycle symbol faces to the left. Where one direction only is indicated by the sign, the arrow when pointing horizontally to the left or to the right may be placed at the bottom of the sign in the manner shown in diagram 2610.1
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)

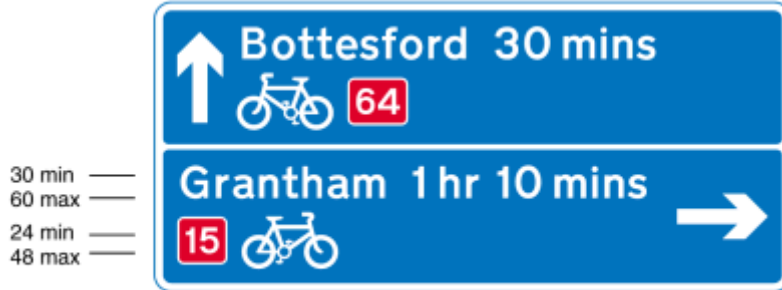

2601.1A

Directions of numbered routes for pedal cycles forming part of a national cycle route network with an indication of journey times from a junction ahead

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, Items 12, 16, 19, 20, 34 Journey times may be varied. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. The cycle symbol and route number may be placed alongside the destination in the manner shown in diagram 2602.1A. Where one direction only is indicated by the sign, the arrow when pointing horizontally to the left or to the right may be placed at the bottom of the sign in the manner shown in diagram 2610.1
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1

Direction and distance to destinations shown along a numbered route for pedal cycles forming part of a national cycle route network (Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 15, 19, 20, 34 The name of the cycle route may be added, varied or omitted as appropriate, and may be on more than one line. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. Where the cycle symbol is shown below a place name and the sign points to the right, the cycle symbol shall face to the right and any route number shall be placed to the left of the cycle symbol. The pedestrian symbol shown in diagram 2605 (reversed as appropriate) may be added to the left of the route number when the cycle symbol faces to the right and to the right of the route number when the cycle symbol faces to the left
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1A
Same as diagram 2602.1
(Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 5, 9, 12, 19, 20, 34 Same as diagram 2602.1
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1B

Direction and journey time to destinations shown along a numbered route for pedal cycles forming part of a national cycle route network (Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 15, 19, 20, 34 Journey times may be varied. The name of the cycle route may be added, varied or omitted as appropriate, and may be on more than one line. The background colour of the route number patch shall be varied to blue when the route forms part of a regional cycle route network. Where the cycle symbol is shown below a place name and the sign points to the right, the cycle symbol shall face to the right and any route number shall be placed to the left of the cycle symbol
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2602.1C
Same as diagram 2602.1B
(Alternative types)

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 19, 20, 34 Same as diagram 2602.1B
5	Illumination requirements: Schedule 17, item 9

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2608

Direction of route to a tourist attraction for pedestrians

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 19, 28, 29, 33 The cycle symbol shown in diagram 2602.1 may be added to or substituted for the pedestrian symbol. A cycle route number patch may be added to the cycle symbol in the manner shown in diagram 2602.1. The wheelchair symbol shown in diagram 814.2 may be added where the sign indicates facilities and the appropriate route for disabled people
5	Illumination requirements: Schedule 17, item 9



2609

Direction of route for pedestrians to a parking place associated with a tourist attraction

Item	
1	Regulations: None
2	Directions: 13
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 6, 15, 28, 29 The name or location of the parking place may be added. The wheelchair symbol shown in diagram 814.2 may be added where the sign indicates the appropriate route for disabled people
5	Illumination requirements: Schedule 17, item 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2703
Direction of temporary diversion route
from junction ahead

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 12, 20 Any symbol shown in Part VII of Schedule 13 may be substituted for "Diverted traffic". The U-turn arrow shown in diagram 2111.1 may be substituted for the horizontal arrow and shall always be on the right hand side of the sign
5	Illumination requirements: Schedule 17, item 4



2704
Direction of temporary diversion route

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 15, 20 Any symbol shown in Part VII of Schedule 13 may be substituted for "Diverted traffic"
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2705
Junction ahead leading to temporary diversion routes to the destinations shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 12, 16, 19, 20, 30, 31, 32, 34
5	Illumination requirements: Schedule 17, item 4



2706
Roundabout ahead leading to a temporary diversion route to the destination shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 16, 19, 20, 30, 31, 32, 34 "Diverted traffic" or any symbol shown in Part VII of Schedule 13 may be substituted for the place name destination
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7


New diagrams for Schedule 7 to the 2002 regulations (continued)



2707

Direction of temporary diversion route to destination shown

Item	
1	Regulations: None
2	Directions: 13A
3	Diagrams: None
4	Permitted variants: Schedule 16, items 3, 5, 15, 19, 20, 30, 31, 32, 34
5	Illumination requirements: Schedule 17, item 4

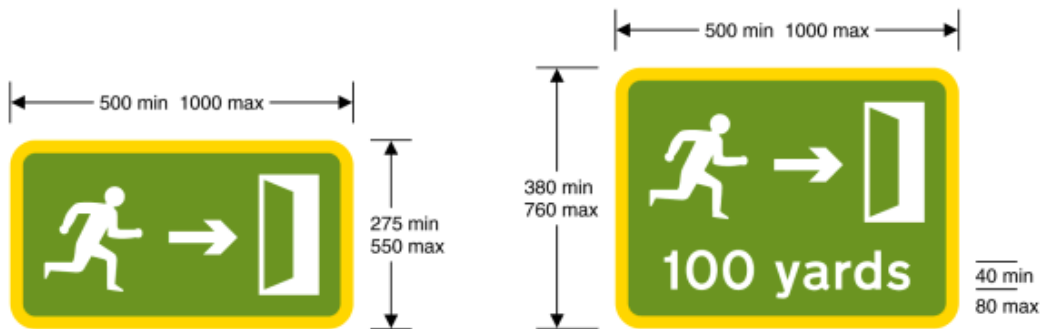

2711

Direction to emergency exit for pedestrians from a tunnel

2711.1

Direction and distance to emergency exit for pedestrians from a tunnel

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 13, 28 The arrow may be placed below the symbols
5	Illumination requirements: Schedule 17, item 2

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 13, 28 The arrow may be placed below the symbols
5	Illumination requirements: Schedule 17, item 2

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



2716

Junction ahead leading to a temporary diversion route, the direction along which is indicated by a symbol shown in Part VII of Schedule 13

Item	
1	Regulations: None
2	Directions: None
3	Diagrams: None
4	<p>Permitted variants: Schedule 16, items 12, 14, 19, 20 "M1 North" may be varied to the name of a road, to a route number and a place name, or to a route number and "Junction" and the junction number, or to a description of a route. "closed" may be varied to:</p> <ol style="list-style-type: none"> "closed to" and a type of vehicle or road user "closed at" and a place name or "Junction" and the junction number "closed after" and a place name or "Junction" and the junction number <p>The upper part of the sign may be omitted. "Alternative route" may be varied to "To rejoin", or to "To rejoin" and a route number. "to" and a destination may be added after "Alternative route". The diversion symbol may be varied to any of those shown in Part VII of Schedule 13, to any combination of place names and route numbers, to a description of a route or to the name of a road. "follow" may be omitted or varied to "via", "use" or "use" and "Junction" and the junction number. Where shown on the sign, "Junction" may be varied to "J"</p>
5	Illumination requirements: Schedule 17, item 4

100 min
300 max



2901

Regulations in force under section 17 of the 1984 Act start to apply to the road at this point

Item	
1	Regulations: None
2	Directions: 14
3	Diagrams: None
4	<p>Permitted variants: Schedule 16, item 20 The motorway route number may be placed above the symbol</p>
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 7

New diagrams for Schedule 7 to the 2002 regulations (continued)



Not more than 3 times the height of the capital letter on the lower part of the sign
 — 250 min
 — 400 max

2919.2

Distance ahead to a named motorway service area at which fuel, parking, toilets and refreshments are available, and a picnic area, overnight accommodation, LPG fuel and a Tourist Information Point or Centre may be available, 24 hours a day throughout the year, and showing the name of the operator and the price per litre of unleaded petrol


Item	
1	Regulations: 13
2	Directions: 14
3	Diagrams: None
4	Permitted variants: Schedule 16, item 8 The name of the operator may be varied. The operator's logo may be shown in the upper panel. The legend, logo, background and border of the upper panel may be in any contrasting colours. The upper panel border may be omitted. The upper panel may be omitted. "Puddleworth" shall be varied to another geographical name as appropriate. The LPG fuel, picnic area, "i" and bed symbols may be omitted as appropriate. The petrol price where shown shall accord with that currently being charged for 1 litre of unleaded petrol. The petrol price row may be omitted and the white petrol pump symbol shown in diagram 2310.2 added at the beginning of the top row of symbols
5	Illumination requirements: Schedule 17, item 4

Regulation 34(9)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8


New diagrams for Schedule 8 to the 2002 regulations

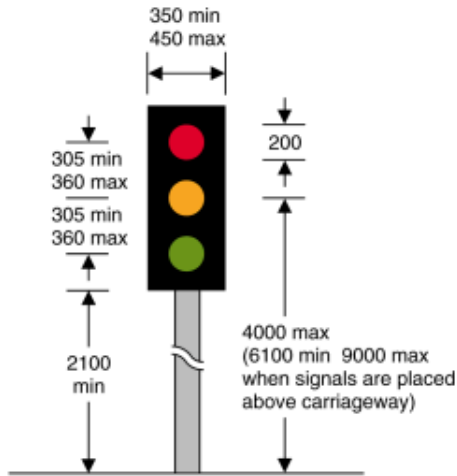

3000

Light signals for the control of vehicular traffic at road junctions, at signal-controlled crossing facilities, or at places where the headroom or width of the road is permanently reduced

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Schedule 16, item 47

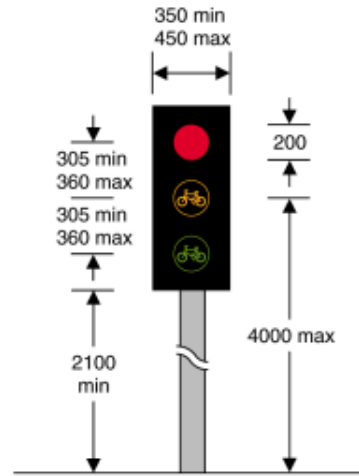

3000.2


Light signals for the control of vehicular traffic consisting solely of pedal cycles

Item	
1	Regulations: 4, 10, 33, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 1001, 1055.1, 1055.2, 4003.6
4	Permitted variants: None

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

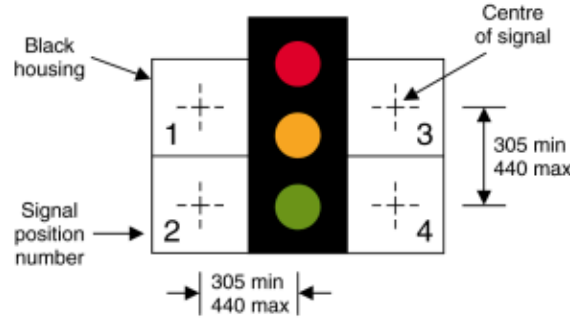

3000.7

As diagram 3000 with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2", "3" and "4" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted


Table of combinations

Item 1	Signal position	1	2	3	4
Item 2	Signal combinations	None	3001.2 (A, B or C); or 3001.3 (A, B or C); or 3013	None	None
		None	None	None	3001.2 (C, D or E); or 3001.3 (C, D or E); or 3013
		3013	3001.2 (A, B or C); or 3001.3 (A, B or C)	None	None
		None	None	3013	3001.2 (C, D or E); or 3001.3 (C, D or E)
		3001.2 (B or C); or 3001.3 (B or C)	3001.2 (A); or 3001.3 (A)	None	None
		3001.2 (C); or 3001.3 (C)	3001.2 (A or B); or 3001.3 (A or B)	None	None
		None	None	3001.2 (C or D); or 3001.3 (C or D)	3001.2 (E); or 3001.3 (E)
		None	None	3001.2 (C); or 3001.3 (C)	3001.2 (D or E); or 3001.3 (D or E)
		None	3013	None	None
		None	None	None	3013

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

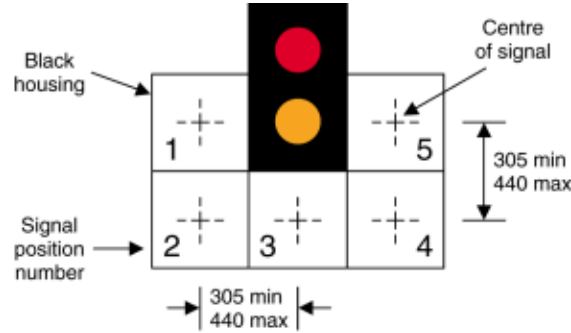

3000.8

As diagram 3000, but without the green aspect and with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2", "3", "4" and "5" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted


Table of combinations

Item 1	Signal position	1	2	3	4	5
Item 2	Signal combinations	None	3013; or none	3001.2; or 3001.3	None	None
		None	None	3001.2; or 3001.3	3013; or none	None
		3013; or none	3001.2 (A, B or C); or 3001.3 (A, B or C)	3001.2 (D or E); or 3001.3 (D or E)	None	None
		3013; or none	3001.2 (A or B); or 3001.3 (A or B)	3001.2 (C, D or E); or 3001.3 (C, D or E)	None	None
		None	None	3001.2 (A, B or C); or 3001.3 (A, B or C)	3001.2 (D or E); or 3001.3 (D or E)	3013; or none
		None	None	3001.2 (A or B); or 3001.3 (A or B)	3001.2 (C, D or E); or 3001.3 (C, D or E)	3013; or none

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 8

New diagrams for Schedule 8 to the 2002 regulations (continued)

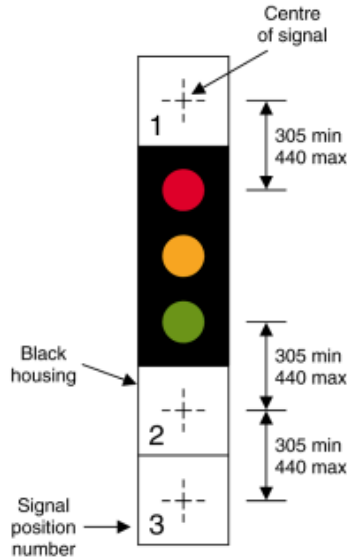

3000.9


As diagram 3000 with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2" and "3" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted

Table of combinations

Item 1	Signal position	1	2	3
Item 2	Signal combinations	3013	None	None
		None	3001.2; or 3001.3	3001.2; or 3001.3; or none
		None	3013	None
		None	3001.2; or 3001.3	3013; or none

Regulation 34(10)

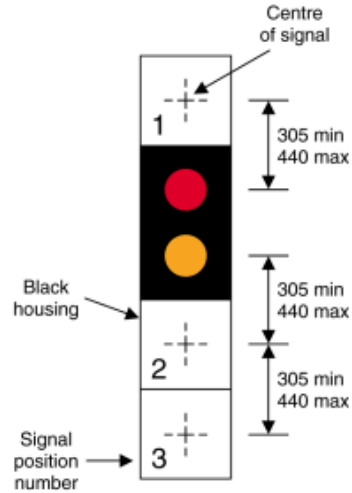

3000.10

As diagram 3000, but without the green aspect and with additional signals as shown in diagram 3001.2, 3001.3 or 3013 placed in any of the positions marked "1", "2" and "3" in accordance with the table of combinations below (Position numbers and centre marks do not form part of the signal)

Item	
1	Regulations: 4, 10, 33, 34, 36, 37, 41, 43, 47, 48, 49
2	Directions: 18, 21, 42, 44A, 46, 47, 54, 55, 56
3	Diagrams: 543.1, 1001, 1001.2, 1001.2A, 1055.1, 1055.2
4	Permitted variants: Where a signal shown in diagram 3001.2, 3001.3 or 3013 is not placed in one of the marked positions, the housing for that signal shall be omitted


Table of combinations

Item 1	Signal position	1	2	3
Item 2	Signal combinations	3013; or none	3001.2; or 3001.3	None
		None	3001.2; or 3001.3	3001.2; or 3001.3; or 3013

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9


New diagrams for Schedule 9 to the 2002 regulations

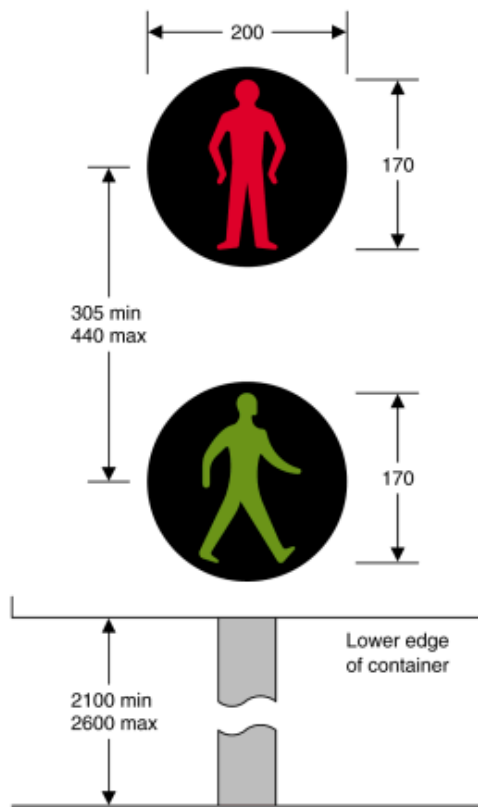

4002.1

Light signals for pedestrians

Item	
1	Regulations: 4, 47, 47A
2	Directions: 18, 44A, 46, 49, 54, 54A, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003, 4003.1
4	Permitted variants: None

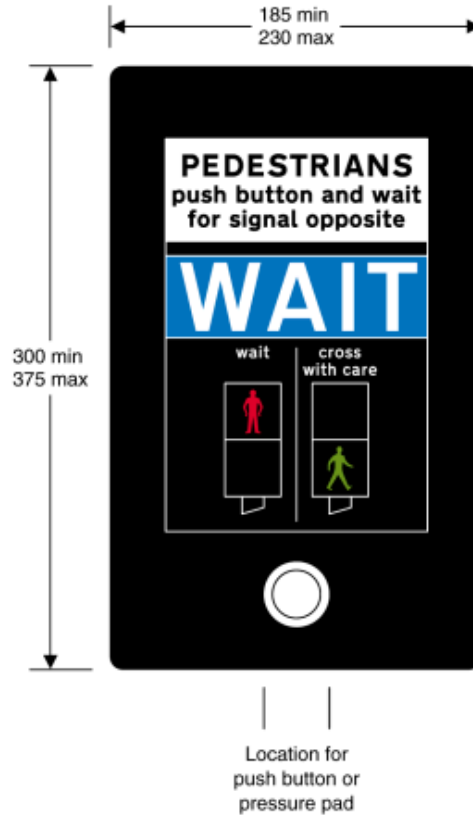

4003


Instructions to pedestrians above the push button control for calling up pedestrian phases at light signals

Item	
1	Regulations: 4, 47, 47A
2	Directions: 44A, 46, 54, 54A, 55, 56
3	Diagrams: 4002.1
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

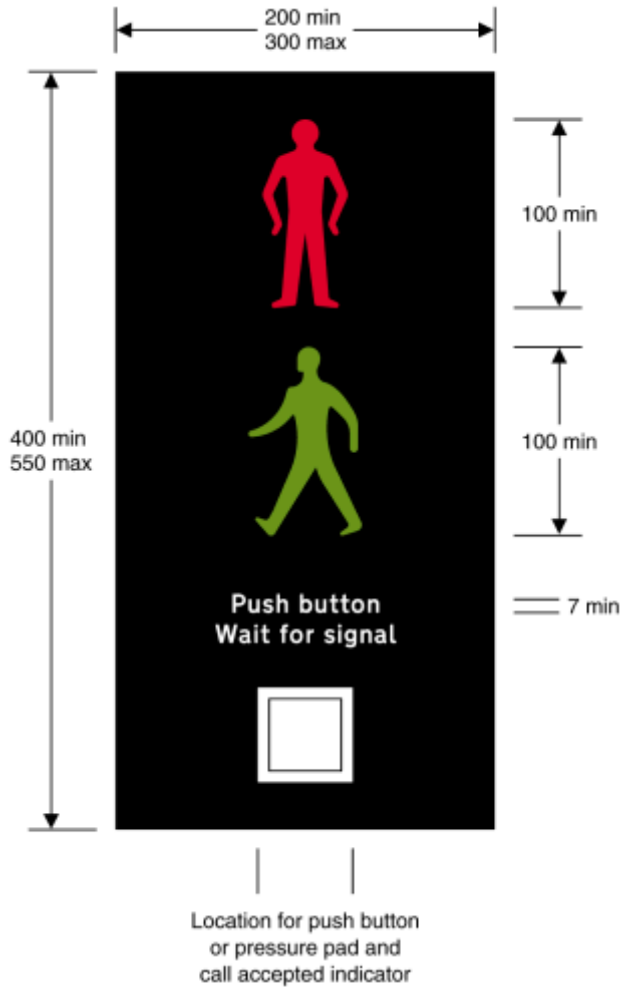

4003.1


Near side light signals and instructions for pedestrians at a pedestrian facility controlled by light signals

Item	
1	Regulations: 4, 47, 47A
2	Directions: 18, 44A, 46, 54, 54A, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4002.1, 4003.1A
4	Permitted variants: Schedule 16, item 2B The horizontal positions of the red and green figures may be varied independently of each other. Multiple red and green figures may be provided. The face containing the signal and instructions may be curved and may comprise more than one unit. The legend "Stand on mat" may be added between the legends "Push button" and "Wait for signal"

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

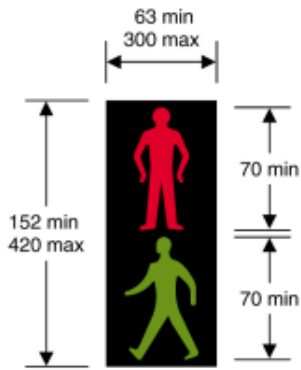

4003.1A
Supplementary near side light signals for pedestrians at a pedestrian facility controlled by light signals

Item	
1	Regulations: 4, 47
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.1
4	Permitted variants: Schedule 16, Item 28 The horizontal positions of the red and green figures may be varied independently of each other. The face containing the signal may be curved

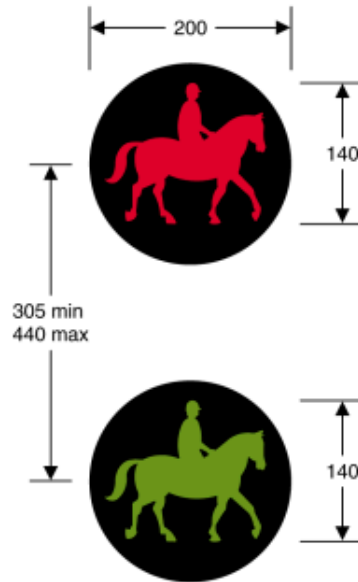


4003.2
Light signals for equestrian traffic

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.3
4	Permitted variants: None

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

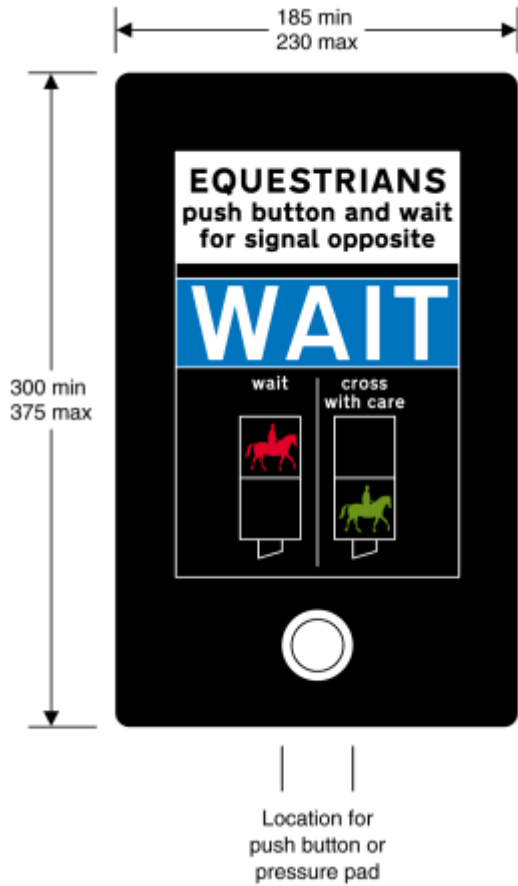

4003.3


Instructions to horse riders above the push button control for calling up equestrian traffic phases at light signals

Item	
1	Regulations: 4, 48
2	Directions: 44A, 46, 54, 55, 56
3	Diagrams: 4003.2
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

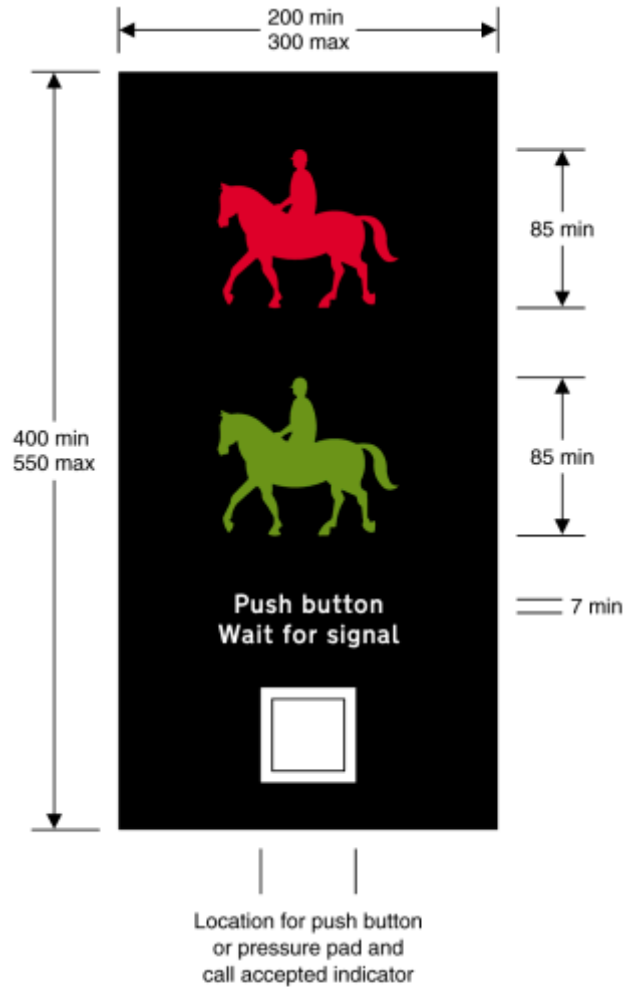

4003.4


Near side light signals and instructions for horse riders at an equestrian traffic crossing facility controlled by light signals

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.4A
4	Permitted variants: Schedule 16, item 28 The horizontal positions of the red and green ridden horse symbols may be varied independently of each other. Multiple red and green ridden horse symbols may be provided. The face containing the signal and instructions may be curved and may comprise more than one unit

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

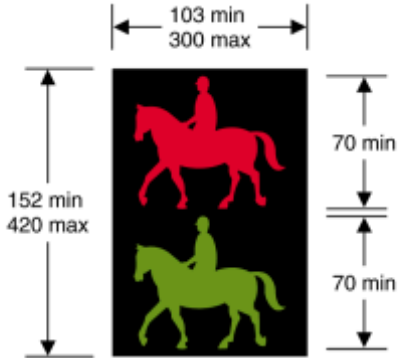


4003.4A

Supplementary near side light signals for horse riders at an equestrian traffic crossing facility controlled by light signals

Item	
1	Regulations: 4, 48
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.4
4	Permitted variants: Schedule 16, item 28 The horizontal positions of the red and green ridden horse symbols may be varied independently of each other. The face containing the signal may be curved

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

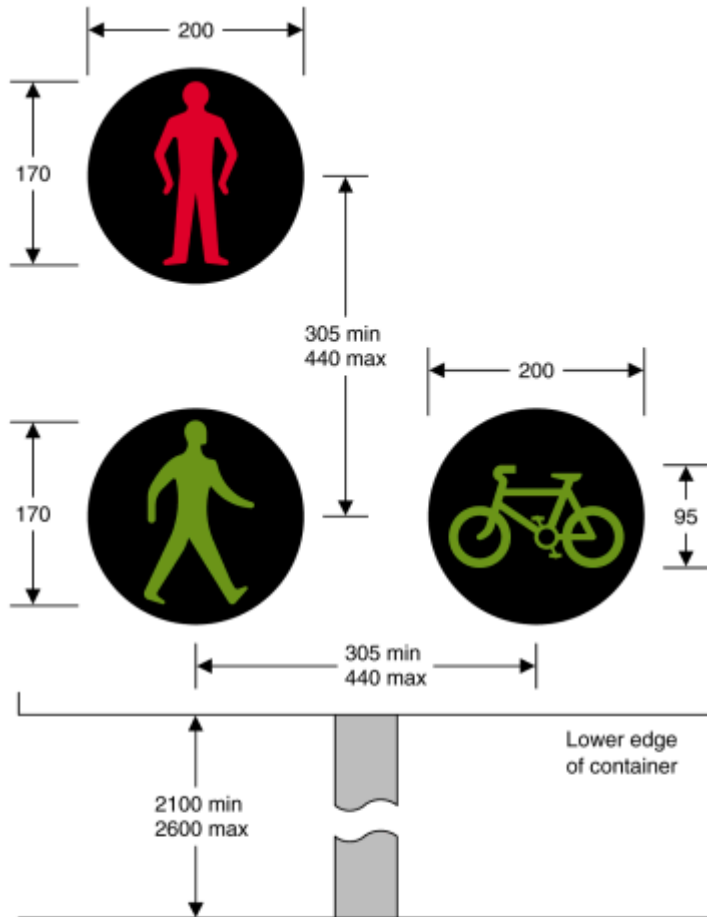


4003.5
Light signals for pedestrians and cyclists
at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.6
4	Permitted variants: The cycle aspect may be positioned to the left of the green pedestrian aspect

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

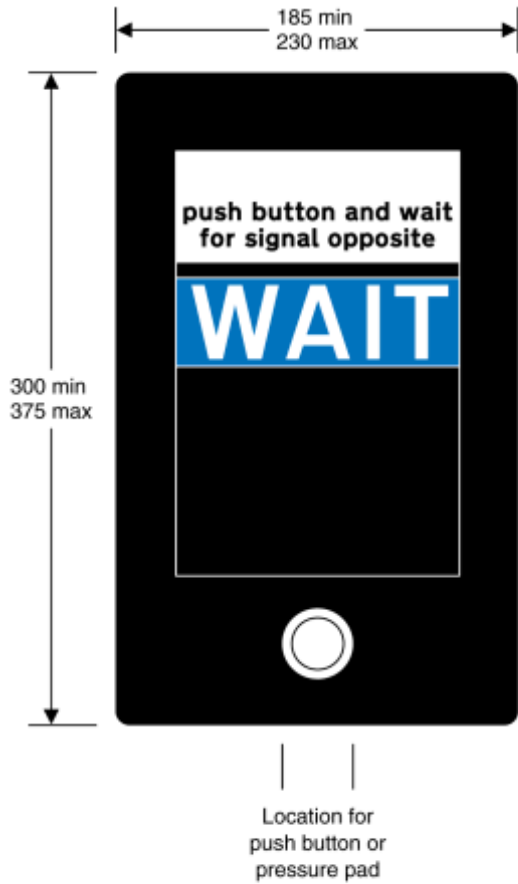

4003.6


- (a) Instructions to pedestrians and cyclists above the push button control for calling up pedestrian and cycle phases at a Toucan crossing; or
- (b) instructions to cyclists above the push button control for calling up cycle phases at a crossing controlled by the light signals shown in diagram 3000.2

Item	
1	Regulations: 4, 49
2	Directions: 44A, 46, 54, 55, 56
3	Diagrams: 3000.2, 4003.5
4	Permitted variants: The legend "WAIT" may be illuminated in white, off-white or yellow

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

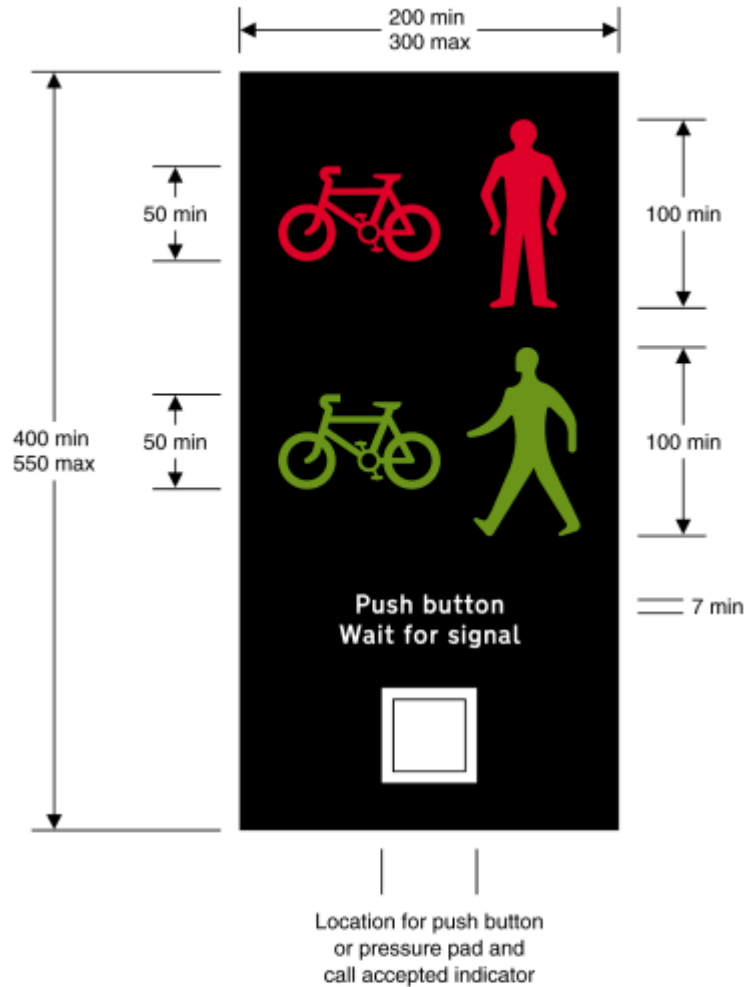

4003.7


Near side light signals and instructions for pedestrians and cyclists at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 49, 54, 55, 56
3	Diagrams: 1001.3, 1055.1, 1055.2, 4003.7A
4	Permitted variants: The combined cycle and pedestrian symbols may be reversed in a mirror image. The face containing the signal and instructions may be curved and may comprise more than one unit

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 9

New diagrams for Schedule 9 to the 2002 regulations (continued)

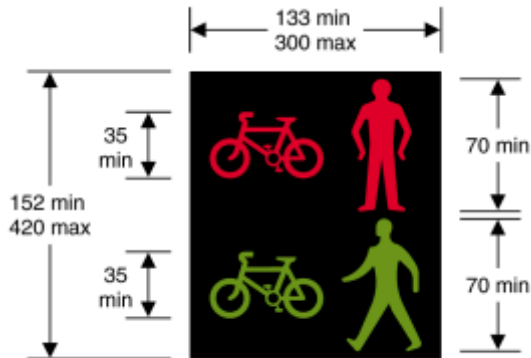

4003.7A

Supplementary near side light signals for pedestrians and cyclists at a Toucan crossing

Item	
1	Regulations: 4, 49
2	Directions: 18, 44A, 46, 54, 55, 56
3	Diagrams: 4003.7
4	Permitted variants: The combined cycle and pedestrian symbols may be reversed in a mirror image. The face containing the signal may be curved

Regulation 34(11)

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations



7005
Delays possible for specified period
owing to road works ahead

Item	
1	Regulations: 54
2	Directions: 36
3	Diagrams: None
4	Permitted variants: Schedule 16, item 38 The phrase "until March 2012" may be omitted. The diagram 7001 symbol and the distance plate may be omitted. The date may be on a single line
5	Illumination requirements: Schedule 17, item 1




7009
Loose chippings on road ahead

Item	
1	Regulations: 54
2	Directions: 21, 36
3	Diagrams: 513.2, 570, 572, 573, 7009.1
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)

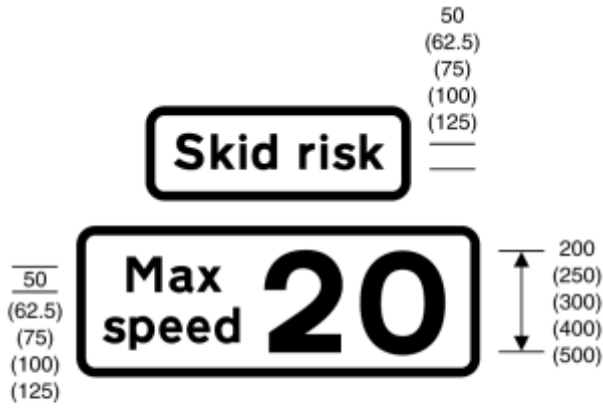

7009.1

Risk of skidding and maximum speed of 20 mph
advised on road with loose chippings

Item	
1	Regulations: None
2	Directions: 21, 36
3	Diagrams: 7009
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 8

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)



7014.1
Temporary or permanent reduction
in bridge headroom ahead

Item	
1	Regulations: None
2	Directions: 36, 37
3	Diagrams: None
4	Permitted variants: Schedule 16, item 1
5	Illumination requirements: Schedule 17, item 17



7016
Zebra or signal-controlled crossing facility
temporarily out of use
(Sign for pedestrians, cyclists or equestrians)

Item	
1	Regulations: None
2	Directions: 36, 44A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 9




7019
Light signals not in use

Item	
1	Regulations: 54
2	Directions: 36, 44A
3	Diagrams: None
4	Permitted variants: None
5	Illumination requirements: Schedule 17, item 4

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.


SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)

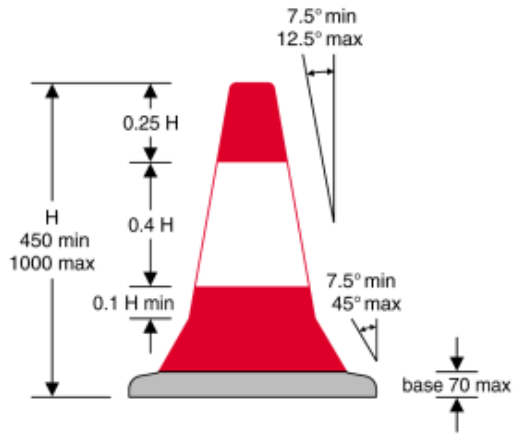

Item	
1	Regulations: 54, 56
2	Directions: 36, 41, 42
3	Diagrams: 7104, 7105
4	Permitted variants: The colour of the base may be varied in accordance with regulation 56(2)
5	Illumination requirements: Schedule 17, item 16

7101.1
Edge of a route for vehicular traffic through or past a temporary obstruction (Traffic cone)

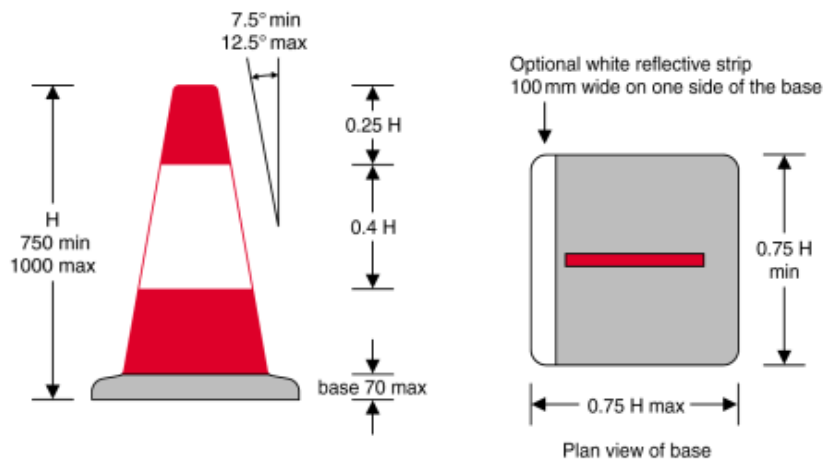


7102
Edge of a route for vehicular traffic through or past a temporary obstruction on a motorway or dual carriageway road (Flat traffic delineator)

Item	
1	Regulations: 11, 54, 56
2	Directions: 36, 42
3	Diagrams: None
4	Permitted variants: The colour of the base may be varied in accordance with regulation 56(7)
5	Illumination requirements: Schedule 17, item 16

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)

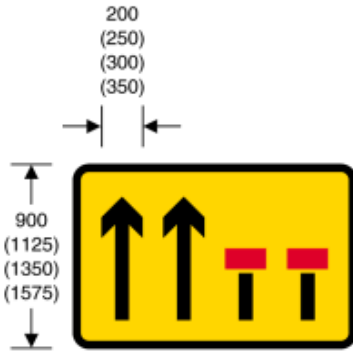

7202

Two right hand lanes of a four lane dual carriageway road or of a one-way street closed to traffic ahead

Item	
1	Regulations: 54
2	Directions: 21, 36
3	Diagrams: 7208
4	Permitted variants: Schedule 16, item 16
5	Illumination requirements: Schedule 17, item 1



7282

Symbol that may be incorporated into a road works sign to indicate a lane subject to a temporary prohibition on goods vehicles exceeding the maximum gross weight shown

Item	
1	Regulations: None
2	Directions: 7, 36
3	Diagrams: Same as 7280
4	Permitted variants: Same as diagram 622.1A. The size of the diagram 622.1A symbol shall be increased to 900 mm diameter when used in conjunction with the sign shown in diagram 7283.1 or 7284.1
5	Illumination requirements: Not applicable

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

SCHEDULE—PART 10

New diagrams for Schedule 12 to the 2002 regulations (continued)



7301
Temporary access to a construction or road works site

Item	
1	Regulations: None
2	Directions: 36
3	Diagrams: 506.1
4	Permitted variants: The legend may be varied to: 1. "WORKS TRAFFIC ONLY" 2. "NO WORKS TRAFFIC" 3. "WORKS ACCESS" and an access identifier in white characters on the red background of the sign
5	Illumination requirements: Schedule 17, item 4



7306
Direction to be taken by road works or construction traffic to an access to a works site ahead

Item	
1	Regulations: None
2	Directions: 36
3	Diagrams: None
4	Permitted variants: Schedule 16, items 6, 16 "ONLY" may be varied to an access identifier in white characters on the red background of the sign
5	Illumination requirements: Schedule 17, item 4

PART 2

The Traffic Signs (Amendment) (No. 2) General Directions 2011

Citation, commencement and interpretation

- 1.—(1) These general directions—
 - (a) may be cited as the Traffic Signs (Amendment) (No. 2) General Directions 2011;
 - (b) together with the regulations contained in Part 1 of this instrument, may be cited as the Traffic Signs (Amendment) (No. 2) Regulations and General Directions 2011; and
 - (c) come into force on 30th January 2012.
- (2) In these general directions—
 - (a) “the 1984 Act” means the Road Traffic Regulation Act 1984(1); and
 - (b) “the 2002 general directions” means the Traffic Signs General Directions 2002(2).

Preliminary

2. The 2002 general directions are amended as follows.

Amendment of direction 3

3. In direction 3 (interpretation—general), for paragraph (1), substitute—
 - “(1) In these Directions—
 - (a) “one-way road” means a road on which the driving of vehicles otherwise than in one particular direction is prohibited;
 - (b) “permit parking area” means an area into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 663.3;
 - (c) “restricted parking zone” means an area—
 - (i) into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 663.2; and
 - (ii) in which none of the road markings shown in diagrams 1017, 1018.1, 1019 and 1020.1 has been placed;
 - (d) “two-way street” means a road which is not a one-way road;
 - (e) “the Regulations” means the Traffic Signs Regulations 2002; and
 - (f) the expressions listed in paragraph (2) have the same meaning as in the Regulations.”.

Amendment of direction 7

4. In direction 7 (signs to be placed only to indicate the effect of a statutory prohibition), in paragraph (2)(a)—
 - (a) after “637.2,” insert “637.2A,”;
 - (b) after “660.7,” insert “660.8, 660.9,”;
 - (c) after “663.1,” insert “663.2, 663.3,”;

(1) 1984 c.27.

(2) Part II of S.I. 2002/3113. Relevant amending instruments are S.I. 2004/1275, 2005/1670, 2008/2177 and 2011/1040.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

- (d) after “664,” insert “664.1,”;
- (e) for “958.1, 959, 959.1,” substitute “958A, 958.1, 959, 959A, 959.1,”; and
- (f) after “960.1,” insert “960.2,”.

Amendment of direction 8

5. In direction 8 (the placing of certain signs to indicate the beginning of a restriction, requirement, prohibition or speed limit)—

- (a) in paragraph (1), after “663.1,” insert “663.2, 663.3,”; and
- (b) in paragraph (4), after “Where the relevant road has” insert “only”.

Amendment of direction 9

6.—(1) Direction 9 (beginning of a speed limit—further provisions) is amended as follows.

(2) In paragraph (4), for—

“be placed not further than 20 metres from the junction and so as to be visible to such traffic, on each side of the carriageway by which traffic may pass from the relevant road into the other road.” substitute—

“be placed—

- (a) so as to be visible to such traffic; and
 - (b) not further than 20 metres from the junction—
 - (i) if the relevant road has only one carriageway, on each side of that carriageway; or
 - (ii) if the relevant road is a dual carriageway road, on each side of the carriageway by which traffic may pass from the relevant road into the other road.”.
- (3) For paragraph (5)(b), substitute—
- “(b) signs indicating the maximum speed limit have been placed on the other road in accordance with direction 11 not more than 100 metres from the junction and—
 - (i) on each side of the junction; or
 - (ii) where traffic is permitted to enter the other road from the relevant road by proceeding onto the carriageway on only one side of the junction, on that side of the junction.”.

Amendment of direction 10

7. In direction 10 (the placing of certain signs to indicate the end of a restriction, requirement, prohibition or speed limit)—

- (a) in paragraph (1), after “664,” insert “664.1,”; and
- (b) in paragraph (8), after “If the relevant road has” insert “only”.

Amendment of direction 11

8.—(1) Direction 11 (repeater signs) is amended as follows.

(2) In paragraph (1)—

- (a) after “637.2,” insert “637.2A,”;
- (b) after “660.6,” insert “660.7, 660.8, 660.9,”;
- (c) after “661.1,” insert “661.2A,”;

- (d) after “959,” insert “959A,”; and
 - (e) after “960.1” insert “, 960.2”.
- (3) For paragraph (2), substitute—
- “(2) Subject to paragraphs (2A), (2B), (2C), (2D), (2E), (2F), (2G), (3) and (4), at least one of each of the signs to which this paragraph applies shall be placed—
 - (a) along a road which is subject to a restriction, requirement, prohibition or speed limit which can be indicated by the sign; and
 - (b) in the case of the signs shown in diagrams 614, 632, 642, 670 (except as mentioned in paragraph (1)), 672, 956, 957, 959, 959A, 959.1, 960, 960.1, 960.2 and 961, to face each stream of traffic to which the sign is intended to convey that restriction, requirement, prohibition or speed limit.”.
- (4) After paragraph (2), insert—
- “(2A) The sign shown in diagram 614 need not be placed in accordance with paragraph (2)—
 - (a) where the prohibition indicated by that sign applies only at a point on a road and not along a length of road; or
 - (b) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
 - (i) has only one carriageway; and
 - (ii) is shorter than 100 metres.
 - (2B) The sign shown in diagram 632 need not be placed in accordance with paragraph (2) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
 - (a) has no junction with another road; and
 - (b) is shorter than 400 metres.
 - (2C) The sign shown in diagram 642 need not be placed in accordance with paragraph (2) along a length of road which is subject to the prohibition indicated by that sign if that length of road—
 - (a) is subject to a speed limit of 30 mph and is shorter than 800 metres;
 - (b) is subject to a speed limit of 40 mph and is shorter than 1100 metres;
 - (c) is subject to a speed limit of 50 mph and is shorter than 1350 metres; or
 - (d) is subject to a speed limit of 60 mph or to a national speed limit and is shorter than 1600 metres.
 - (2D) The signs shown in diagrams 660 and 660.3 need not be placed in accordance with paragraph (2) on a road within a permit parking area.
 - (2E) The sign shown in diagram 670 need not be placed in accordance with paragraph (2) along a length of road which is subject to the speed limit indicated by that sign if that length of road—
 - (a) is subject to a speed limit of 20 mph and is shorter than 200 metres;
 - (b) is subject to a speed limit of 30 mph, is shorter than 200 metres and does not have a system of carriageway lighting furnished by lamps lit by electricity;
 - (c) is subject to a speed limit of 40 mph and is shorter than 250 metres;
 - (d) is subject to a speed limit of 50 mph and is shorter than 350 metres; or

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

- (e) is subject to a speed limit of 60 mph, is shorter than 400 metres and is a dual carriageway road or a motorway.
- (2F) The sign shown in diagram 672 need not be placed in accordance with paragraph (2) along a length of road which is subject to the speed limit indicated by that sign if that length of road is shorter than 250 metres.
- (2G) The signs shown in diagrams 959 and 959A need not be placed in accordance with paragraph (2) along a length of road along which, or along part of which, there is a bus lane if that length of road—
 - (a) has no junction with another road; and
 - (b) is shorter than 300 metres.”.
- (5) For paragraph (3), substitute—
 - “(3) The sign shown in diagram 670—
 - (a) when varied to “20”, need not be placed in accordance with paragraph (2) on a road within an area into which each entrance for vehicular traffic has been indicated by the sign shown in diagram 674; and
 - (b) when displayed on a variable message sign, need not be placed in accordance with paragraph (2) when the variable message sign is mounted on a gantry or other structure and is so placed that a traffic lane of the carriageway or an actively managed hard shoulder passes directly beneath it.”.
- (6) In paragraph (4)(b), for “motorway” substitute “road”.
- (7) For paragraph (5), substitute—
 - “(5) Subject to paragraph (5A), at least one sign shown in diagram 671 shall be placed—
 - (a) along a length of road (other than a motorway) on which—
 - (i) there is a system of street or carriageway lighting furnished by lamps lit by electricity placed not more than 183 metres apart in England and Wales or not more than 185 metres apart in Scotland; and
 - (ii) a national speed limit is in force; and
 - (b) to face each stream of traffic to which the sign is intended to convey that speed limit.”.
- (8) After paragraph (5), insert—
 - “(5A) The sign shown in diagram 671 need not be placed in accordance with paragraph (5) along a length of road which is subject to the speed limit indicated by that sign if that length of road—
 - (a) has only one carriageway and is shorter than 400 metres; or
 - (b) is a dual carriageway road and is shorter than 450 metres.
 - (5B) In this direction, “bus lane” has the meaning given in regulation 23.”.
- (9) Omit paragraphs (6) and (7).

Amendment of direction 13

- 9. In direction 13 (signs to be placed only on specified types of road), in paragraph (3)—
 - (a) for “2310.1” substitute “2310.2”;
 - (b) for “2511, 2512,” substitute “2511.1, 2512.1.”;
 - (c) after “2601.1,” insert “2601.1A.”;
 - (d) after “2602.1,” insert “2602.1A, 2602.1B, 2602.1C.”; and

- (e) omit “2703, 2704, 2705, 2706, 2707,”.

New direction 13A

10. After direction 13, insert—

“**13A.**—(1) The signs shown in diagrams 2703, 2704, 2705, 2706 and 2707 may not be placed on the main carriageways of a motorway.

(2) In this direction, “main carriageways of a motorway” means all those parts of a motorway—

- (a) onto which vehicular traffic may pass from a motorway entrance slip road; and
- (b) from which vehicular traffic may pass onto a motorway exit slip road, and

includes the carriageways, the central reservation, the hard shoulders and the verges.

(3) For the purposes of paragraph (2), “carriageway” and “verge” each has—

- (a) in relation to a motorway in England or Wales, the same meaning as in the Motorways Traffic (England and Wales) Regulations 1982⁽³⁾; and
- (b) in relation to a motorway in Scotland, the same meaning as in the Motorways Traffic (Scotland) Regulations 1995⁽⁴⁾.”.

Amendment of direction 14

11. In direction 14 (signs to be placed only on specified types of road), in paragraph (1), for “2919.1” substitute “2919.2”.

Amendment of direction 17

12. In direction 17 (signs to be placed only in conjunction with specified road markings— except signs for prohibitions and restrictions on waiting etc), in the table in paragraph (1)—

- (a) after item 8, insert—

“8A.	958A	1010”
------	------	-------

- (b) after item 10, insert—

“10A.	959A	1048 and 1049”
-------	------	----------------

- (c) after item 14, insert—

“14A.	960.2	1057”
-------	-------	-------

Amendment of direction 18

13.—(1) Direction 18 (road markings to be placed only in conjunction with other road markings or specified signs—except road markings for prohibitions and restrictions on waiting etc) is amended as follows.

(2) In table 1 in paragraph (1)—

- (a) after item 3, insert—

⁽³⁾ S.I. 1982/1163. A relevant amendment was made by S.I. 1984/1479.

⁽⁴⁾ S.I. 1995/2507 (S.183), to which there are amendments not relevant to these general directions.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

“3A.	1001.2A	3000, 3000.7, 3000.8, 3000.9 or 3000.10 placed adjacent to the stop line appearing above the pedal cycle symbol in diagram 1001.2A”
------	---------	---

- (b) in column (3) of item 4, in paragraph (b)—
 - (i) after “4003.1” insert “(whether or not used in conjunction with 4003.1A)”;
 - (ii) after “4003.4” insert “(whether or not used in conjunction with 4003.4A)”;
 - (iii) after “4003.7” insert “(whether or not used in conjunction with 4003.7A)”;
- (c) after item 10, insert—

“10A.	1050	1049”
-------	------	-------

- (d) for the entry in column (3) of item 11, substitute—
 - “(a) 955, 956, 957, 959.1, 960.1, 960.2, 965 or 967;
 - (b) 1001.2 when used in conjunction with 1004 or 1004.1; or
 - (c) 2601.2 or 2602.2”; and
- (e) in column (3) of item 18, for “direction 11(2)” substitute “direction 11”.
- (3) In paragraph (2), after “1001.2” insert “or 1001.2A”.
- (4) In table 2 in paragraph (3)—
 - (a) after item 5, insert—

“5A.	1044.2	615 and 811”
------	--------	--------------

- (b) for the entry in column (3) of item 6, substitute—
 - “(a) 1049 and 959;
 - (b) 1049 and 959A; or
 - (c) 1049 and 960”;
- (c) for the entry in column (3) of item 8, substitute—
 - “(a) 1048 and 959;
 - (b) 1048 and 959A;
 - (c) 1048 and 960; or
 - (d) 1048.1 and 960 varied to include the pedal cycle symbol”; and
- (d) omit—

“11.	1050	964 and 1049”
------	------	---------------

Amendment of direction 21

14. In direction 21 (plates to be placed only in combination with specified signs), in the table in paragraph (1)—

- (a) in column (3) of item 12, after “530” insert “or 530A”;
- (b) in column (3) of item 13, after “530,” insert “530A,”;
- (c) in column (3) of each of items 36 and 37, after “530,” insert “530A,”;

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(d) for the entry in column (3) of item 73, substitute “958, 958A, 958.1, 959, 959A or 959.1”; and

(e) after item 76, insert—

“76A.	7009.1	7009”
-------	--------	-------

Amendment of direction 24

15.—(1) Direction 24 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking) is amended as follows.

(2) In paragraph (1), for “subject to paragraph (2)” substitute “subject to paragraphs (2) and (5)”.

(3) In the table in paragraph (1), after item 19, insert—

“19A.	660.8	(a) 1028.3, 1028.4 or 1032, in each case when varied to indicate “CAR CLUB ONLY” or “CAR CLUB”; or (b) 1033 when varied to indicate “CAR CLUB”
19B.	660.9	(a) 1028.3 or 1028.4, in each case when varied to indicate “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”; (b) 1032 when varied to indicate “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”; or (c) 1033 when no legend appears”

(4) After paragraph (4), insert—

“(5) Paragraph (1) shall not apply to the signs shown in diagrams 660 and 660.3 when placed on a road within a permit parking area.”.

Amendment of direction 25

16.—(1) Direction 25 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking) is amended as follows.

(2) For paragraph (1) (except the table), substitute—

“(1) Subject to paragraphs (2) and (3), a road marking shown in a diagram whose number appears in, and which is in the form (if any) specified in, an item in column (2) of the table may be placed on a road only in conjunction with, and on the same side of the road as, a sign shown in a diagram whose number appears in, and which is in the form (if any) specified in, column (3) of that item.”.

(3) In the table in paragraph (1)—

(a) in column (3) of item 11, after “when” insert “the upper panel is varied to the sign shown in diagram 650.2 or 650.3 or”;

(b) in column (3) of item 15, after “660.7,” insert “660.9,”;

(c) after item 12, insert—

“12A.	1028.3 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
-------	---	-------

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

12B.	1028.3 when varied to “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”
------	--	--

(d) after item 14, insert—

“14A.	1028.4 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
14B.	1028.4 when varied to “ELECTRIC VEHICLES ONLY”, “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”

(e) after item 18, insert—

“18A.	1032 when varied to “CAR CLUB ONLY” or “CAR CLUB”	660.8
18B.	1032 when varied to “ELECTRIC VEHICLES”, “ELECTRIC VEHS ONLY” or “ELECTRIC VEHS”	660.9 or 639.1B (when the lower panel is varied to the sign shown in diagram 660.9)”

(f) after item 20, insert—

“21.	1033 when varied to “CAR CLUB”	660.8”
------	--------------------------------	--------

(4) After paragraph (2), insert—

“(3) Except for the road markings shown in diagrams 1017, 1018.1, 1019 and 1020.1, none of the road markings shown in the diagrams whose numbers appear in, and which are in the form (if any) specified in, the items in column (2) of the table may be placed in a permit parking area.”.

Amendment of direction 26

17. In direction 26 (placing of road markings and signs to indicate prohibitions and restrictions on waiting, loading and unloading and parking), omit “664.”.

New direction 26A

18. After direction 26, insert—

“**26A.**—(1) The sign shown in diagram 637.2A may be placed only in a restricted parking zone.

(2) The sign shown in diagram 663.2 may be placed only at the boundary of a restricted parking zone.

(3) The sign shown in diagram 663.3 or 664.1 may be placed only at the boundary of a permit parking area.

(4) The sign shown in diagram 664 may be placed only at the boundary of a controlled parking zone or of a restricted parking zone.”.

Amendment of direction 28

19. In direction 28 (signs to be placed only at specified sites or for specified purposes—migratory toad crossings), in paragraph (b), after “during” insert “January,”.

Amendment of direction 35

20. For direction 35, substitute—

“**35.**—(1) The road marking shown in diagram 1043 or 1044 shall not be placed at a gyratory system or roundabout.

(2) The road marking shown in diagram 1044.1 may be placed—

(a) only on an area of carriageway at a gyratory system or roundabout; and

(b) only if the entry of traffic into that area of carriageway is at all times controlled by traffic light signals.

(3) The road marking shown in diagram 1044.2 may be placed only on an area of carriageway which is not greater than 4.5 metres wide at its narrowest point.”.

Amendment of direction 36

21. In direction 36 (restrictions on the placing of temporary signs), after “other than in diagrams 7014,” insert “7014.1,”.

Amendment of direction 37

22. In direction 37 (restrictions on the placing of temporary signs), after paragraph (1), insert—

“(1A) The sign shown in diagram 7014.1 may, in relation to a bridge under which a road passes, be placed only in connection with works involving a temporary or permanent reduction in the maximum height of vehicle able to pass, on the road, under the bridge (in this direction, “temporary reduction” and “permanent reduction” respectively).

(1B) Where the sign shown in diagram 7014.1 is placed in connection with works involving a temporary reduction, it may be retained only until completion of those works.

(1C) Where the sign shown in diagram 7014.1 is placed in connection with works involving a permanent reduction, it may be retained not later than the end of the period of 6 months beginning with completion of those works.”.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

New direction 38A

23. After direction 38 (restrictions on the placing of temporary signs), insert—

- “38A.—(1) A warning light which shows an intermittent light may not be placed—
- (a) more than 50 metres from a street lamp lit by electricity; or
 - (b) on a road subject to a speed limit of more than 40 mph.
- (2) In this direction, “warning light” has the same meaning as in regulation 55.”.

Revocation of direction 40

24. Direction 40 is revoked.

Amendment of direction 41

25.—(1) Direction 41 (mounting and backing of signs) is amended as follows.

(2) In paragraph (1), for “Subject to paragraphs (2) and (3)” substitute “Subject to paragraphs (2), (3) and (3A)”.

(3) After paragraph (3), insert—

“(3A) The signs shown in diagrams 606, 610, 611, 616, 951, 955, 956 and 957 may be mounted on—

- (a) a bollard which—
 - (i) is illuminated by means of internal lighting; and
 - (ii) conforms to British Standard BS EN 12899-2:2007 or to a corresponding EEA Standard; or
- (b) a self-righting bollard which—
 - (i) is illuminated by the use of retroreflecting material; and
 - (ii) conforms to British Standard BS 8442:2006 or to a corresponding EEA Standard.”.

Amendment of direction 42

26.—(1) Direction 42 (mounting and backing of signs) is amended as follows.

(2) In paragraphs (1)(b)(ii) and (3)(b), for “BS 873” substitute “BS EN 12899-1:2007 Incorporating corrigenda May 2008 and June 2009”.

New direction 44A

27. After direction 44 (mounting of the signs shown in diagrams 560 and 561), insert—

“Mounting of signs with light signals

44A.—(1) Subject to paragraphs (2), (3), (4), (5) and (6), where the light signals prescribed by regulation 33 (whether or not varied in accordance with regulation 34) (“the regulation 33 signals”) or 47 are mounted on a post or other support specially provided for the purpose (“the post”), no other signs may be mounted on the post or affixed, whether directly or indirectly, to those light signals.

(2) One of each of the signs shown in diagrams 606, 612, 613, 614, 616, 954.5, 954.6 and 954.7 may be affixed to the regulation 33 signals, but only if those signs are so placed

that they face the stream of traffic to which they are intended to convey the warnings, information, requirements, restrictions or prohibitions prescribed by the Regulations.

(3) One of each of the signs shown in diagrams 606, 612, 613, 614 and 616 may, in addition to or instead of being affixed to the regulation 33 signals, be mounted on the post, but only if—

- (a) those signs are, when mounted on the post, so placed that they face the stream of traffic to which they are intended to convey the warnings, information, requirements, restrictions or prohibitions prescribed by the Regulations; and
- (b) where the sign shown in any particular one of those diagrams is, in addition to being mounted on the post, affixed to the light signals, the sign shown in that diagram does not, when mounted on the post, face the same stream of traffic as is faced by the sign which is shown in that diagram and affixed to the light signals.

(4) Where the regulation 33 signals are mounted on the post, additional regulation 33 signals may be mounted on the post.

(5) One of each of the signs shown in diagrams 543.1, 954, 954.2, 954.3, 954.4, 7016 and 7019 may be mounted on the post, but only if those signs are so placed that they face the stream of traffic to which they are intended to convey the information prescribed by the Regulations.

(6) Paragraph (1) does not prohibit the mounting, on the post, of the signs shown in diagrams 4002.1, 4003, 4003.1, 4003.1A (when placed with the sign shown in diagram 4003.1), 4003.2, 4003.3, 4003.4, 4003.4A (when placed with the sign shown in diagram 4003.4), 4003.5, 4003.6, 4003.7 and 4003.7A (when placed with the sign shown in diagram 4003.7).”.

Amendment of direction 46

28.—(1) Direction 46 (mounting and backing of light signals, matrix signs and warning lights) is amended as follows.

(2) In paragraph (2)(b)—

- (a) after “4003.1,” insert “4003.1A,”;
- (b) after “4003.4,” insert “4003.4A,”; and
- (c) for “or 4003.7” substitute “, 4003.7 or 4003.7A”.

(3) In paragraph (7)(b), for “regulation 33(1) or (2)” substitute “regulations 33(1) or (2), 41, 47, 48 or 49”.

Substitution of direction 47

29. For direction 47 (placing of road marking shown in diagram 1001 or 1001.2 in conjunction with light signals), and the heading to it, substitute—

“Placing of road marking shown in diagram 1001, 1001.2 or 1001.2A in conjunction with light signals

47.—(1) The light signals prescribed by regulation 33(1) may be placed only in conjunction with—

- (a) the road marking shown in diagram 1001; or
- (b) subject to direction 18(2), the road marking shown in diagram 1001.2 or 1001.2A.

(2) The light signals prescribed by regulation 33(2) or 39(1) may be placed only in conjunction with the road marking shown in diagram 1001.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(3) Paragraphs (1) and (2) shall not apply to light signals while works which necessitate the temporary removal of a road marking are being executed on a road near the light signals.”.

Amendment of direction 49

30. In direction 49 (placing of road marking shown in diagram 1001.3—zig-zag lines), in paragraph (1)(a)—

- (a) after “4003.4” insert “(whether or not placed with the signal shown in diagram 4003.4A)”; and
- (b) after “4003.7” insert “(whether or not placed with the signal shown in diagram 4003.7A)”.

Amendment of direction 54

31. In direction 54 (placing of signals and other signs at crossings), for the words “at signal-controlled crossing facilities” to the end, substitute—

“at signal-controlled crossing facilities where all streams of vehicular traffic are stopped only for the purpose of enabling pedestrians, cyclists or equestrians to cross the carriageway.”.

Amendment of direction 55

32.—(1) Direction 55 (placing of various light signals) is amended as follows.

(2) In paragraph (6), after “the light signals shown in diagram” insert “3000.2 or”.

(3) After paragraph (7), insert—

“(7A) The light signals shown in diagram 4003.1 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1) or (2); or
- (b) the light signals prescribed by regulation 33(1) or (2) and the light signals shown in diagram 4003.1A.

(7B) The light signals shown in diagram 4003.1A may be placed only in conjunction with the light signals shown in diagram 4003.1 and the light signals prescribed by regulation 33(1) or (2).”.

(4) For paragraph (8), substitute—

“(8) The light signals shown in diagram 4003.2 may be placed only in conjunction with the light signals prescribed by regulation 33(1).

(8A) The light signals shown in diagram 4003.4 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1); or
- (b) the light signals prescribed by regulation 33(1) and the light signals shown in diagram 4003.4A.

(8B) The light signals shown in diagram 4003.4A may be placed only in conjunction with the light signals shown in diagram 4003.4 and the light signals prescribed by regulation 33(1).”.

(5) For paragraph (9), substitute—

“(9) The light signals shown in diagram 4003.5 may be placed only in conjunction with the light signals prescribed by regulation 33(1).

(9A) The light signals shown in diagram 4003.7 may be placed only in conjunction with—

- (a) the light signals prescribed by regulation 33(1); or
- (b) the light signals prescribed by regulation 33(1) and the light signals shown in diagram 4003.7A.

(9B) The light signals shown in diagram 4003.7A may be placed only in conjunction with the light signals shown in diagram 4003.7 and the light signals prescribed by regulation 33(1).”.

Amendment of direction 56

33. In direction 56 (approval of types of sign and signals by the Secretary of State), in paragraph (2)(f), for “2511, 2512” substitute “2511.1, 2512.1”.

Amendment of direction 57

34.—(1) Direction 57 (studs) is amended as follows.

(2) In paragraph (4), for ““the European Standards” means European Standards EN 1463—1: 1997 and 1463—2: 2000” substitute ““the British Standards” means British Standards BS EN 1463-1:1998 Incorporating Amendment No. 1 and BS EN 1463-2:2000”.

(3) For paragraph (5), substitute—

“(5) A type of stud meets the requirements of this paragraph if and only if, being a type of stud which falls within a description specified in column (2) of an item in the table, it meets—

- (a) the requirement or test specification, of the British Standards, specified in column (3) of the item, as that requirement or specification applies to studs within the class specified in that column; or
- (b) a requirement or test specification, in a corresponding EEA Standard, equivalent to the requirement or test specification of those British Standards as that requirement or specification of the British Standards applies to studs within the class specified in that column.”.

(4) In the “NOTE” beneath the table, for “the European Standards” substitute “the British Standards”.

Amendment of Schedule 1 to the general directions

35.—(1) Schedule 1 to the 2002 general directions (placing of signals and other signs at signal-controlled crossing facilities) is amended as follows.

(2) In paragraph 1, after the definition of “near side signals” insert—

““supplementary near side signals” means a sign of the size, colour and type shown in diagram 4003.1A, 4003.4A and 4003.7A;”.

(3) In paragraph 6(4) (near side signals at crossings)—

- (a) in paragraph (a), for “regulation 49(5) or (8)” substitute “regulation 47(2A), 48(2A), 49(2A) or 49(8)”;
- (b) after paragraph (a), omit “and”; and
- (c) after paragraph (b), insert—

“and

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

- (c) one set of supplementary near side signals may be placed above each set of near side signals at the crossing.”.

Saving

36.—(1) Paragraph (2) applies to any sign which—

- (a) is shown in diagram 832.1A, 832.2A, 2310.1, 2511, 2512 or 2919.1 in the Traffic Signs Regulations 2002⁽⁵⁾ as in force immediately prior to the coming into force of the Traffic Signs (Amendment) (No. 2) Regulations 2011⁽⁶⁾; and
- (b) is, by regulation 35 of the Traffic Signs (Amendment) (No. 2) Regulations 2011, treated as prescribed by the 2002 regulations.

(2) Subject to paragraphs (3) and (4), in relation to a sign to which this paragraph applies, any provision of the 2002 general directions, as amended by these general directions, which would, but for the omission by these general directions of references to the diagram in which that sign is shown, refer to that diagram, is to be treated as referring to that diagram notwithstanding the omission, by these general directions, of the reference to that diagram in that provision.

(3) In relation to the signs shown in each of diagrams 832.1A, 832.2A, 2310.1, 2511 and 2512, paragraph (2) ceases to have effect on the expiry of the period of two years beginning with the date on which these general directions come into force.

(4) In relation to the sign shown in diagram 2919.1, paragraph (2) ceases to have effect on the expiry of the period of ten years beginning with the date on which these general directions come into force.

⁽⁵⁾ Part I of S.I. 2002/3113. Relevant amending instruments are S.I. 2003/2155, 2004/3168, 2005/1670, 2005/2929 (W.214), 2005/3225 (W.237), 2006/594, 2006/2083, 2008/2177, 2011/935 and 2011/1040 and S.S.I. 2005/344 and 2006/129.

⁽⁶⁾ Part 1 of this instrument.