

THE SCHEDULE TO THE SCHEME

Regulation 3

Plans and Specifications of the Scotman's Canal Bridge

The location and general design of the bridge are shown on the plans numbered H/8894/100/2 and H279/HCL/601 rev. C marked 'The Wigan Borough Council (Scotman's Flash, Wigan Canal Bridge) Scheme 2017'.

Points of commencement and termination

From a point on the west bank of the Leeds Liverpool Canal 550 metres east of the B5238 Poolstock Lane.

To a point on the east bank of the Leeds Liverpool Canal 575 metres east of the B5238 Poolstock Lane.

Span(s)

Single span bridge. Clear span between faces of abutments of 32.00 metres. Clear span between reinforced soil abutments of 25.3 metres.

Headway

Not less than 5.0 metres above top water level and not less than 3.87 metres above the new towpath level, which runs alongside the canal.


Waterway

A minimum clear navigable waterway of 9.35 metres.

Overall dimensions

The bridge will carry a 2 lane dual carriageway comprising of 4 x 3.65 metre lane highway, a 3.5 metre combined cycleway/footway, a 2 metre clear verge and 2.3 metre central reserve.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

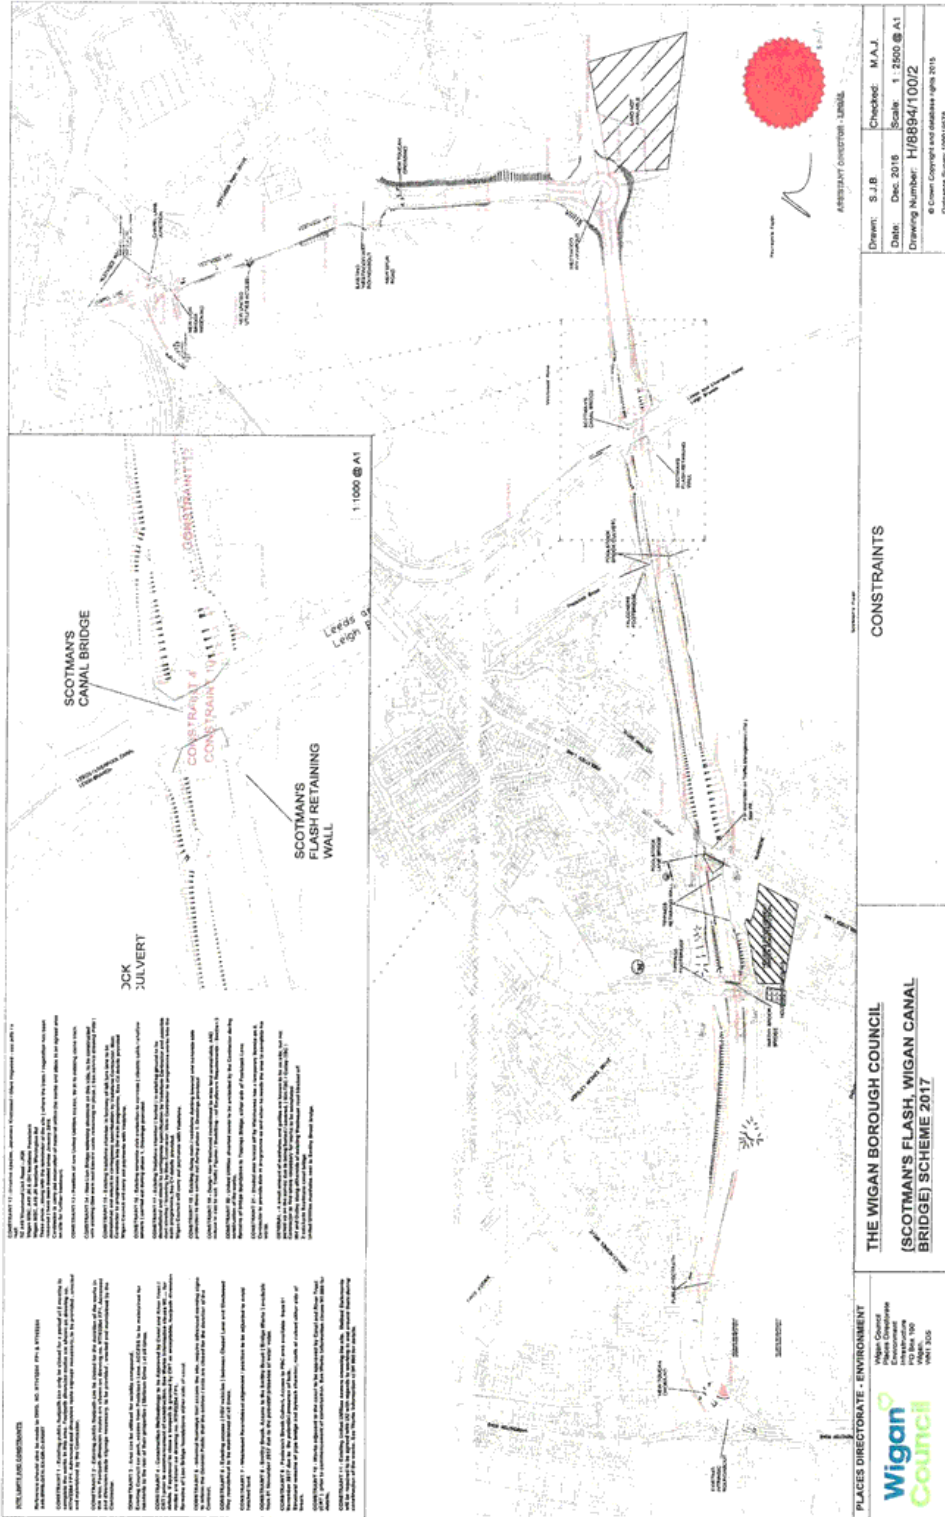

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

