

SCHEDULE 2

Regulation 3, Direction 3

Signs that warn of hazards and signs for bridges and other structures

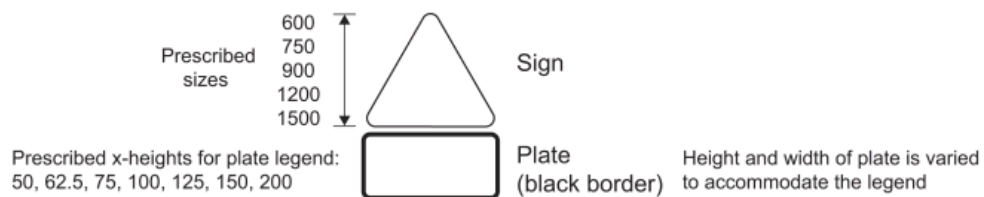
PART 1

Provisions applying to signs and plates in Parts 2 and 3

1. A warning of a description in column 2 of an item in the sign table in Part 2 must be conveyed by a triangular sign which is of—
 - (a) the colour and type provided for in the diagram in column 3; and
 - (b) the size shown for a sign in the diagram above the table.
2. A warning or information in column 4 of an item in the sign table in Part 2 is for supplementing the warning in column 2 and is to be conveyed by a plate (“a first associated plate”) which—
 - (a) includes the legend indicated in column 4 in a manner which complies with the requirements as to size provided for in respect of a plate in the diagram above the sign table in Part 2; and
 - (b) is of the colour and type provided for in that diagram.
3. Where a number is mentioned in column 5 of the sign table in Part 2, the plate provided for at that item number in the sign table in Part 3 (a “supplementary associated plate”) is an associated plate of the triangular sign in question.
4. A provision of Part 7 mentioned (by reference to paragraph number) in column 6 of the sign table in Part 2 applies in relation to the triangular sign in question.
5. A Schedule 2 General Direction mentioned (by reference to paragraph number) in column 7 of the sign table in Part 2 applies in relation to the triangular sign in question.

PART 2

Warning signs and associated plates







Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.





Sign table — Schedule 2, Part 2

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
1	Diagram 504.1 Crossroads ahead (Alternative types)		A distance	1	3	
2	Diagram 505.1 T-junction ahead (Alternative types)		A distance	1	3	
3	Diagram 506.1 Side road ahead (Alternative types)		A distance	1	3	
4	Diagram 507.1 Staggered junction ahead (Alternative types)		A distance	1	3	
5	Diagram 508.1 Traffic merges		A distance			


Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
	ahead from left					
6	Diagram 509.1 Traffic merges ahead onto main carriageway		A distance			
7	Diagram 510 Roundabout ahead		1. A distance; or 2. "Adverse camber"	1 or 4 (or both)	3	
8	Diagram 512 Bend ahead (Alternative types)		1. "Adverse camber"; 2. "Keep in low gear"; or 3. "Oncoming vehicles in middle of road"	1, 2 or 4 (or any combination)	3	
9	Diagram 512.1 Junction on the outside of a bend ahead (Alternative types)		1. "Adverse camber"; 2. "Keep in low gear"; or 3. "Oncoming vehicles in middle of road"	1, 2 or 4 (or any combination)	3	





Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
10	Diagram 512.2 Junction on the inside of a bend ahead (Alternative types)		1. "Adverse camber"; 2. "Keep in low gear"; or 3. "Oncoming vehicles in middle of road"	1, 2 or 4 (or any combination)	3	
11	Diagram 512.3 Crossroads on a bend ahead (Alternative types)		1. "Adverse camber"; 2. "Keep in low gear"; or 3. "Oncoming vehicles in middle of road"	1, 2 or 4 (or any combination)	3	
12	Diagram 513 Double bend or series of bends ahead (Alternative types)		1. "For" and a distance; 2. "Adverse camber"; 3. "Keep in low gear"; or 4. "Oncoming vehicles in middle of road"	1, 2 or 4 (or any combination)	3	
13	Diagram 516 Road narrows on		1. A distance; 2. "Single file traffic" with or without an arrow pointing to the left or to the right;	1		





Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Applicable provisions in Part 7	(7) Schedule 2 General Directions
	both sides ahead		3. "Single file traffic" and a distance, with or without an arrow pointing to the left or to the right; 4. "Single file traffic for" and a distance; 5. "Single track road" with or without an arrow pointing to the left or to the right; 6. "Single track road" or "Single track road for" and a distance, with or without an arrow pointing to the left or to the right; or 7. "Oncoming vehicles in middle of road"			
14	Diagram 517 Road narrows on one side ahead (Alternative types)		1. A distance; 2. "Single file traffic" with or without an arrow pointing to the left or to the right; 3. "Single file traffic" and a distance, with or without an arrow pointing to the left or to the right; 4. "Single file traffic for" and a distance; 5. "Single track road" with or without an arrow pointing to the left or to the right; 6. "Single track road" or "Single track road for" and a distance, with or without an arrow pointing to the left or to the right; or	1		




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1)	(2)	(3)	(4)	(5)	(6)	(7)
Item	Description	Diagram	First associated plate legend	Supplementary associated plate (by reference to Part 3 sign table item number)	Application provisions in Part 7	Schedule 2 General Directions
			7. "Oncoming vehicles in middle of road"			
15	Diagram 520 Dual carriageway road ends ahead		1. A distance; 2. "Single file traffic", with or without a distance; or 3. "Single file traffic for" and a distance	1		
16	Diagram 521 Two-way traffic ahead		1. A distance; or 2. "For" and a distance			
17	Diagram 522 Two-way traffic on route crossing ahead		A distance			
18	Diagram 523.1 Steep hill downwards ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. "For" and a distance ; 3. An arrow pointing to the left or to the right; 4. "Low gear now"; 5. "Keep in low gear"; or	1 or (when used with a first plate containing legend 4 or 5): 3, or both 1 and 3	12	





Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
			6. "Low gear for" and a distance			
19	Diagram 524.1 Steep hill upwards ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. "For" and a distance; 3. An arrow pointing to the left or to the right; 4. "Low gear now"; 5. "Keep in low gear"; or 6. "Low gear for" and a distance	1	12	
20	Diagram 528 Hump bridge ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or 3. "Oncoming vehicles in middle of road"	1		
21	Diagram 529 Opening or swing bridge ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right			
22	Diagram 529.1 Tunnel ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or			




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Applicable provisions in Part 7	(7) Schedule 2 General Directions
			3. "Oncoming vehicles in middle of road"			
23	Diagram 544.1 Pedestrians in road ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or 3. "No footway for" and a distance			
24	Diagram 544.2 Frail or disabled pedestrians likely to cross road ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; 3. "Disabled people" or "Blind people" with or without an arrow pointing to the left or to the right; or 4. "Disabled people" or "Blind people" and a distance, with or without an arrow pointing to the left or to the right			
25	Diagram 545 Children going to school or from school or playground ahead		1. "School", "Patrol", "Playground", "Disabled children", "Blind children" or "Deaf children" with or without an arrow pointing to the left or to the right; 2. "School", "Patrol", "Playground", "Disabled children", "Blind children" or "Deaf children" and a distance with or without an arrow pointing to the left or to the right; or			1






Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Applicable provisions in Part 7	(7) Schedule 2 General Directions
			3 “No footway for” and a distance			
26	Diagram 950 Cycle route ahead (Alternative types)		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; 3. “Cycle crossing” or “Cycles crossing” with or without an arrow pointing to the left or to the right; or 4. “Cycle crossing” or “Cycles crossing” and a distance with or without an arrow pointing to the left or to the right			
27	Diagram 548 Cattle likely to be in road ahead		“For” and a distance			
28	Diagram 549 Sheep likely to be in road ahead		“For” and a distance			
29	Diagram 550 Wild horses or		“For” and a distance			




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Applicable provisions in Part 7	(7) Schedule 2 General Directions
	ponies likely to be in road ahead					
30	Diagram 550.1 Accompanied horses or ponies likely to be in road ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or 3. "For" and a distance			
31	Diagram 550.2 Horse drawn vehicles likely to be in road ahead		"For" and a distance			
32	Diagram 551 Wild animals likely to be in road ahead		"For" and a distance			





Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
33	Diagram 551.2 Wild fowl likely to be in road ahead		“For” and a distance			
34	Diagram 553.1 Agricultural vehicles likely to be in road ahead		1. “Farm traffic”, “Wide vehicles” or “Tractors turning”; or 2. “Farm traffic for”, “Wide vehicles for” or “Tractors turning for” and a distance			1
35	Diagram 552 Cattle grid ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or 3. “Horse drawn vehicles and animals” and an arrow pointing to the left or to the right			
36	Diagram 554B Gate ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right			
37	Diagram 554C Gates		1. “For” and a distance, with or without an arrow pointing to the left or to the right; or			




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
	Gates ahead		2. An arrow pointing to the left or to the right			
38	Diagram 554 Ford ahead		1. A distance with or without an arrow pointing to the left or to the right; 2. An arrow pointing to the left or to the right; or 3. "Road liable to flooding" with or without an arrow pointing to the left or to the right			
39	Diagram 554.1 Risk of brake failure ahead (after passing a ford or before descending a steep gradient)		"Keep in low gear"	When used with the first plate, item 3		
40	Diagram 555 Quayside or river bank ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right			





Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
41	Diagram 555.1 Water course alongside road ahead (Alternative types)		"For" and a distance			
42	Diagram 556.1 Soft verges ahead		1. "Soft verges"; or 2. "Soft verges for" and a distance			1
43	Diagram 557.1 Road hump or series of road humps ahead		1. "Hump" or "Humps" with or without an arrow pointing to the left or to the right; 2. "Hump" or "Humps" with two arrows, one pointing to the left and one pointing to the right; 3. "Hump" or "Humps for" and a distance, with or without an arrow pointing to the left or to the right; or 4. "Hump" or "Humps for" and a distance, with two arrows, one pointing to the left and one pointing to the right			1
44	Diagram 559		"For" and a distance			




Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Applicable provisions in Part 7	(7) Schedule 2 General Directions
	Risk of falling or fallen rocks ahead (Alternative types)					
45	Diagram 581 Side winds likely ahead		“For” and a distance			
46	Diagram 558 Low flying aircraft or sudden aircraft noise likely ahead		1. “For” and a distance; 2. “Gliders”; or 3. “Gliders for” and a distance			
47	Diagram 558.1 Low flying helicopters or sudden helicopter		“For” and a distance			



Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
	noise likely ahead					
48	Diagram 582 Slow moving military vehicles likely to be crossing or in road ahead		“For” and a distance			
49	Diagram 583 Slow moving vehicles likely on incline ahead		“Slow lorries for” and a distance and “mile” or “miles”			1
50	Diagram 584 Traffic queues likely on road ahead		1. “Queues likely” with or without an arrow pointing to the left or to the right; or 2. “Queues likely on slip road” with or without an arrow pointing to the left or to the right			1, 2
51	Diagram 770		1. A distance with or without an arrow pointing to the left or to the right; or		6	

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) <i>Item</i>	(2) <i>Description</i>	(3) <i>Diagram</i>	(4) <i>First associated plate legend</i>	(5) <i>Supplementary associated plate (by reference to Part 3 sign table item number)</i>	(6) <i>Application provisions in Part 7</i>	(7) <i>Schedule 2 General Directions</i>
	Level crossing with gate or barrier ahead		2. An arrow pointing to the left or to the right			
52	Diagram 771 Railway level crossing without gate or barrier ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right		6	
53	Diagram 772 Tramcars crossing ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right		6	
54	Diagram 779 Electrified overhead cable ahead		1. "Safe height" and numerals indicating height in imperial units and, in brackets, the height in metric units, with or without "load gauge"; or 2. As legend 1 and— (a) a distance; (b) an arrow pointing to the left or to the right; or		5, 6	1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) First associated plate legend	(5) Supplementary associated plate (by reference to Part 3 sign table item number)	(6) Application provisions in Part 7	(7) Schedule 2 General Directions
			(c) a distance and an arrow pointing to the left or to the right			
55	Diagram 782 Risk of grounding at a railway or tramway level crossing or hump backed bridge ahead		1. A distance with or without an arrow pointing to the left or to the right; or 2. An arrow pointing to the left or to the right		6	
56	Diagram 562 Other danger ahead		1. "Ambulance station", "Blasting", "Blind summit", "Fire station", "Hidden dip", "Pedestrians crossing", "Road liable to flooding", or "Rising bollards", with or without an arrow pointing to the left or to the right; or 2. "Ambulance station", "Blasting", "Blind summit", "Fire station", "Hidden dip", "Pedestrians crossing", "Road liable to flooding" or "Rising bollards" and a distance, with or without an arrow pointing to the left or to the right			1

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

PART 3

Supplementary associated plates for placing in combination with signs in Part 2


1. A warning, information or restriction of a description specified in column 2 of an item in the sign table must be conveyed by a supplementary associated plate which is of the size, colour and type provided for—

- (a) in the diagram in column 3 of the item; or
- (b) in that diagram varied in accordance with column 4.

Sign table — Schedule 2, Part 3

(1)	(2)	(3)	(4)
<i>Item</i>	<i>Description</i>	<i>Diagram</i>	<i>Variants</i>
1	Diagram 511 Reduction in speed necessary for a change in road layout ahead		62.5 75 100 125 150 200 “REDUCE SPEED NOW” may be varied to “HEAVY PLANT CROSSING” when used in combination with the sign shown in item 1, 2, 3, 4, 9, 10 or 11 of the Part 2 table
2	Diagram 513.2 Maximum speed in mph advised at a bend or other hazard	50 62.5 75 100 125 	The numerals may be varied to the appropriate advised maximum speed 200 300 400 500
3	Diagram 817.2 Escape lane ahead for vehicles unable to stop on a steep hill		1. The route symbol may be varied 2. “ahead” may be varied to a distance, varied to an arrow pointing to the left or to the right, or omitted 50 62.5 75 100 125

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Variants
4	Diagram 513.1A Risk of lorries overturning on adverse camber (with bend to the left) and maximum speed advised		1. The symbol may be reversed when the bend is to the right 2. The numerals indicating the maximum speed advised may be varied as appropriate 50 min 150 max 3. The legend "Max speed 20" may be omitted 100 min 300 max

PART 4

Traffic signs for bridges and other structures

1. A warning, information or prohibition of a description in column 2 of an item in the sign table in this Part must be conveyed by a sign that is—

- (a) of the colour and type; and
- (b) complies with the requirements as to size,

provided for in the diagram in column 3 of the item.

2. In the case of the description at item 3, the warning is to be conveyed by both the triangular signs shown in the diagram in combination, and paragraph 1 applies to each of those signs.

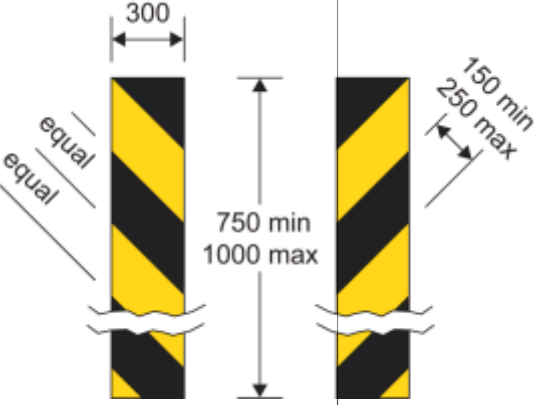

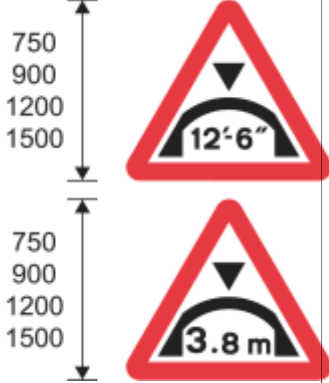
3. A number in column 4 of the sign table in this Part indicates that the plate or structure warning marking provided for at that item number in the sign table in Part 5 is an associated plate or marking of the sign provided for in the sign table in this Part at the item number at which the relevant column 4 entry appears.

4. A provision of Part 7 mentioned (by reference to paragraph number) in column 5 of the sign table in this Part applies to the sign provided for at the item number in question.

5. A Schedule 2 General Direction mentioned (by reference to paragraph number) in column 6 of the sign table in this Part applies to the upright sign provided for at the item number in question.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

Sign table — Schedule 2, Part 4

(1) Item	(2) Description	(3) Diagram	(4) Associated plate or structure warning marking (by reference to an item number in the Part 5 sign table)	(5) Applicable provision in Part 7	(6) Schedule 2 General Directions
1	Diagram 528.1 End of a bridge parapet, abutment wall, tunnel mouth or other obstruction adjacent to the carriageway			9	
2	Diagram 530A Maximum headroom available at hazard, with height indicated in both metric and imperial units		1, 3, 4 or 5	6, 12	
3	Diagram 531.1A Maximum headroom available at arch bridge ahead		2 or 5	6, 12	3

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Associated plate or structure warning marking (by reference to an item number in the Part 5 sign table)	(5) Applicable provisions in Part 7	(6) Schedule 2 General Directions
4	Diagram 1024.1 Road marking indicating path to be taken by high vehicles under a low bridge or to avoid an overhanging structure			11, 13	
5	Diagram 629.2A Vehicles exceeding height indicated prohibited with height indicated in both metric and imperial units		4	1, 2, 6, 12	

PART 5

Associated plates and structure warning markings for signs in Part 4



1.—(1) A warning or information of a description specified in column 2 of an item in the sign table in this Part must be conveyed by a plate or structure warning marking which is of the size, colour and type provided for—

- (a) in the diagram in column 3 of the item; or
- (b) in that diagram varied in accordance with column 4.

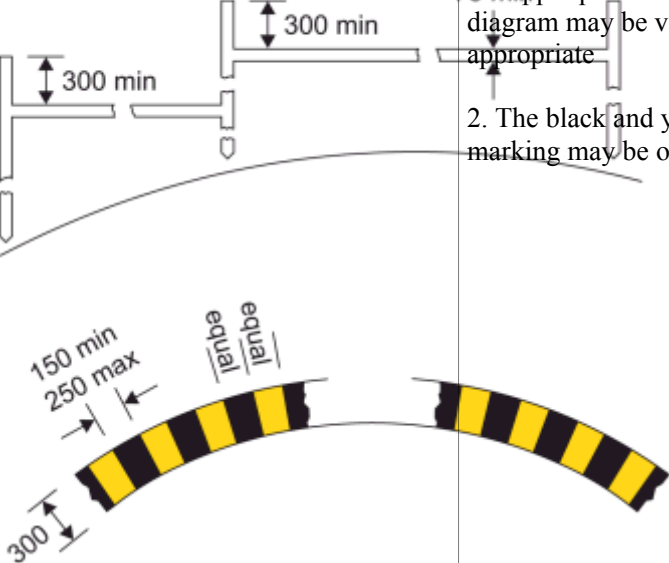
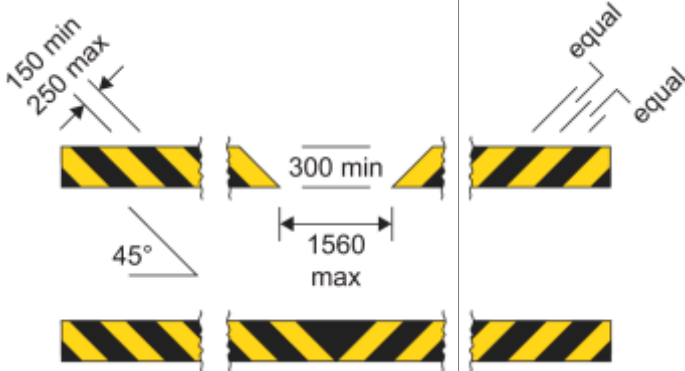
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

2. A provision of Part 7 mentioned (by reference to paragraph number) in column 5 of the sign table applies to the structure warning marking provided for at the item number in question.


Sign table — Schedule 2, Part 5

(1) <i>Item</i>	(2) <i>Description</i>	(3) <i>Diagram</i>	(4) <i>Variants</i>	(5) <i>Applicable provisions in Part 7</i>
1	Diagram 530.1 Reduced headroom over part of road due to overhanging building or structure		1 The legend may include— 75 (a) a distance, with or without an arrow pointing to the left or to the right; (b) an arrow pointing to the left or to the right 2. “building” may be varied to “buildings” or “structure”	
2	Diagram 531.2 High vehicles to use middle of road at arch bridge ahead,		The legend may include an arrow pointing to the left or to the right	

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Variants	(5) Applicable provisions in Part 7
3	<p>Diagram 532.4</p> <p>Upper: Extent of headroom available at the side of and in the centre of a road at an arch bridge.</p> <p>Lower: Marking highlighting reduced headroom at an arch bridge.</p>		<p>1. The position and number of chord markings in the upper part of the diagram may be varied as appropriate</p> <p>2. The black and yellow marking may be omitted</p>	7, 9
4	<p>Diagram 530.2</p> <p>Reduced headroom at a hazard (Alternative types)</p>			7, 9

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) <i>Item</i>	(2) <i>Description</i>	(3) <i>Diagram</i>	(4) <i>Variants</i>	(5) <i>Applicable provisions in Part 7</i>
5	Diagram 572 Distance ahead to hazard		1. The distance may be varied to another distance 2. The legend may include an arrow pointing to the left or to the right	

PART 6

Other warning signs

1. A warning of a description in column 2 of the sign table in this Part must be conveyed by a sign that is—

- (a) of the colour and type; and
- (b) complies with the requirements as to size,

provided for in the diagram in column 3 of the sign table at the item number for that description, or that diagram as varied in accordance with column 4.

2. In the case of the description at item 1, the warning is to be conveyed by the triangular sign shown in the diagram and, depending on the warning to be conveyed, both associated plates shown in the diagram, or only the upper one, and paragraph 1 applies to each of those signs.

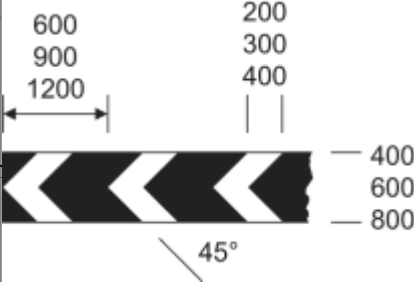
3. A provision of Part 7 mentioned (by reference to paragraph number) in column 5 applies to the sign, or combination, at the item number in question.

4. A Schedule 2 General Direction mentioned (by reference to paragraph number) in column 6 applies to the sign at the item number in question.

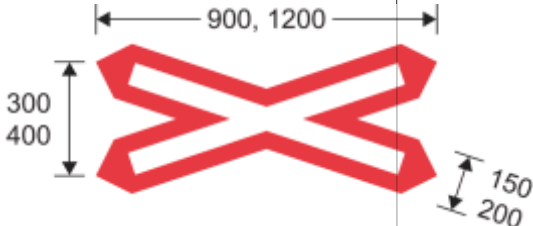
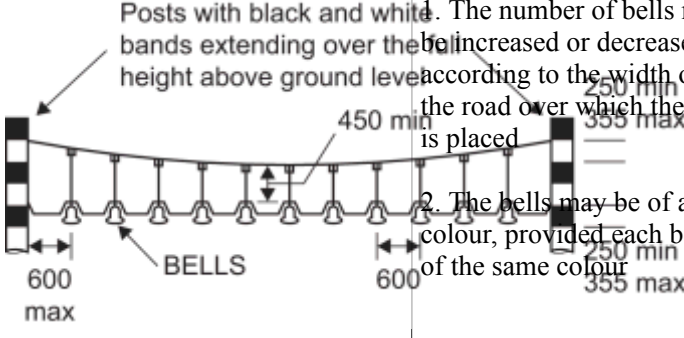
Sign table — Schedule 2, Part 6

(1) Item	(2) Description	(3) Diagram	(4) Variants	(5) Applicable provisions in Part 7	(6) Schedule 2 General Directions
1	Diagram 501 Junction ahead controlled by a “GIVE WAY” or “STOP” sign, where an indication may be given that the junction is with a dual carriageway road		<p>1. In the upper plate “GIVE WAY” is varied to “STOP” if the stop sign is placed at a junction ahead</p> <p>2. The lower associated plate may be omitted</p> <p>3. In the upper plate the distance may be varied</p>	6	4
2	Diagram 560 Edge of carriageway or		<p>1. The colour of the circular sign or the rectangular sign may be varied to white or amber</p> <p>2. The surface of the rectangular sign may be curved</p>	4	5

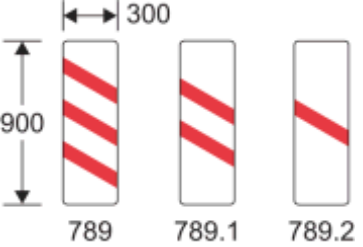
Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Variants	(5) Applicable provisions in Part 7	(6) Schedule 2 General Directions
	obstruction near that edge (Alternative types)				
3	Diagram 515 Sharp deviation of route		<p>1. The chevrons may be reversed to point to the right</p> <p>2. The number of chevrons may be varied</p> <p>3. The corners of the sign may be rounded, with a radius not greater than 10 mm</p> <p>4. The sign may be formed of a series of vertical flexible elements that need not have a horizontal cross section that is flat, provided that the elements extend to ground level to form the support for the sign and the support is coloured black</p> <p>5. Where vertical flexible elements are used, the horizontal distance between the pointed ends of two consecutive chevrons may be increased by up to 4% of the dimensions shown in the diagram</p> <p>6. Where vertical flexible elements are used, a yellow border may be added to the outside edge of the part of the sign that comprises the chevrons</p>	8, 9	

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Variants	(5) Applicable provisions in Part 7	(6) Schedule 2 General Directions
			<p>7. Where vertical flexible elements are used, the sign may include a white arrow on a blue circular background as shown by the diagram in column 3 at item 1 of the sign table in Part 2 of Schedule 3. This is to be placed over the chevrons and any yellow border, and formed as part of those elements</p>		
4	<p>Diagram 774 Location of a railway or tramway level crossing without gate or barrier</p>				
5	<p>Diagram 781 Load gauge giving audible warning to</p>		<p>1. The number of bells may be increased or decreased according to the width of the road over which the sign is placed 2. The bells may be of any colour, provided each bell is of the same colour</p>	10	

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

(1) Item	(2) Description	(3) Diagram	(4) Variants	(5) Applicable provisions in Part 7	(6) Schedule 2 General Directions
	drivers where vehicles exceed safe height under electrified overhead cables				
6	Diagrams 789, 789.1, 789.2 Countdown markers to railway or tramway level crossing		Each sign may be reversed		

PART 7

Provisions applicable to signs

- Section 36 of the 1988 Act applies to the sign.

2. The sign is specified for the purposes of column 5 of the entry in Schedule 2 to the Road Traffic Offenders Act 1988(1) relating to offences under section 36 of the 1988 Act.
3. If the sign is displayed on a variable message sign and displays its aspects by means of light-emitting characters or symbols, the legend “SLOW DOWN” may be displayed beneath the sign (and any associated plates) in characters having a height of not less than one quarter of the height of the displayed sign.
4. The sign must be illuminated by means of retroreflecting material.
5. The safe height shown on the first associated plate must be between 1 foot 3 inches and 2 feet (380 mm to 600 mm) less than the height of the lowest part of the overhead wire, of which the sign gives warning, over the highest part of the surface of the carriageway beneath that wire.
- 6.—(1) Subject to sub paragraph (2), where the sign is placed on a road within 50 metres of any lamp which forms part of a system of street-lighting, the illumination requirements for the sign are—
 - (a) where that system of street-lighting is illuminated throughout the hours of darkness, the sign must be illuminated by internal or external lighting for so long as that system is illuminated and may also be reflectorised; or
 - (b) where that system of street-lighting is not illuminated throughout the hours of darkness—
 - (i) the sign must be illuminated by internal or external lighting for so long as that system is illuminated and must also be reflectorised; or
 - (ii) the sign must be illuminated throughout the hours of darkness by internal or external lighting and may also be reflectorised.

(2) Sub-paragraph (1) does not apply to a sign where the road is subject to a speed limit of 20 mph.

(3) The exception in sub-paragraph (2) does not apply to a sign provided for at item 2 or 5 of the Part 4 sign table mounted on a bridge or other structure and, consequently, sub-paragraph (1) applies to such a sign.
7. The structure warning marking may be left unlit, or be illuminated either by means of internal or external lighting or by means of retroreflecting material.
8. Paragraph 6 applies to that part of the sign, if any, which is the white arrow on a blue circular background.
9. Where those parts of the sign coloured yellow, if any, are retroreflective, they may also be fluorescent.
10. The sign must not be illuminated.
11. The road marking must be reflectorised.
12. The sign may have different numerals to those shown in the diagram.
13. The arrow in the road marking may indicate a path to the left instead of to the right.

PART 8

The Schedule 2 General Directions

1. The triangular sign must not be placed unless placed with a plate showing the applicable first plate legend indicated in column 4 of the sign table in Part 2 at the item number in question.
2. The sign may be fitted to the rear of a road maintenance vehicle.

(1) 1988 c.53.

Status: This is the original version (as it was originally made). This item of legislation is currently only available in its original format.

3. The two triangular signs must be placed together (with or without an associated plate).
4. The triangular sign must be placed with its upper associated plate (whether or not the lower plate is also included).
- 5.—(1) The sign (“an edge of carriageway sign”) must be placed so that the top of the sign is not less than 550 mm nor more than 1000 mm above the surface of the adjacent carriageway.
 - (2) Where an edge of carriageway sign is mounted on a post specifically provided for the purpose that part of the post which extends above ground level may be—
 - (a) of any single colour; or
 - (b) coloured black and white in alternate horizontal bands, each band being not less than 225 mm or more than 350 mm deep.
 - (3) An edge of carriageway sign must be erected to display—
 - (a) the colour red on the left hand edge of the carriageway as viewed by the drivers of approaching vehicles; and
 - (b) the colour white on the right hand edge of the carriageway when so viewed, unless the edge is the edge of the carriageway of a dual carriageway road or a one-way road when the colour amber must be displayed.