

This document is meant purely as a documentation tool and the institutions do not assume any liability for its contents

► B

COUNCIL DIRECTIVE

of 20 March 1970

on the approximation of the laws of the Member States relating to measures to be taken against air pollution by gases from positive-ignition engines of motor vehicles

(70/220/EEC)

(OJ L 76, 6.4.1970, p. 1)

Amended by:

	Official Journal		
	No	page	date
► <u>M1</u> Council Directive 74/290/EEC of 28 May 1974	L 159	61	15.6.1974
► <u>M2</u> Commission Directive 77/102/EEC of 30 November 1976	L 32	32	3.2.1977
► <u>M3</u> Commission Directive 78/665/EEC of 14 July 1978	L 223	48	14.8.1978

Amended by:

► <u>A1</u> Act of Accession of Denmark, Ireland and the United Kingdom of Great Britain and Northern Ireland	L 73	14	27.3.1972
---	------	----	-----------

▼B

COUNCIL DIRECTIVE
of 20 March 1970

on the approximation of the laws of the Member States relating to measures to be taken against air pollution by gases from positive-ignition engines of motor vehicles

(70/220/EEC)

THE COUNCIL OF THE EUROPEAN COMMUNITIES,

Having regard to the Treaty establishing the European Economic Community, and in particular Article 100 thereof;

Having regard to the proposal from the Commission;

Having regard to the Opinion of the European Parliament⁽¹⁾;

Having regard to the Opinion of the Economic and Social Committee⁽²⁾;

Whereas a regulation of 14 October 1968 amending the *Straßenverkehrs-Zulassungs-Ordnung* was published in Germany in the *Bundesgesetzblatt* Part I of 18 October 1968; whereas that regulation contains provisions on measures to be taken against air pollution by positive-ignition engines of motor vehicles; whereas those provisions will enter into force on 1 October 1970;

Whereas a regulation of 31 March 1969 on the 'Composition of exhaust gases emitted from petrol engines of motor vehicles' was published in France in the *Journal officiel* of 17 May 1969; whereas that regulation is applicable:

- from 1 September 1971, to type-approved vehicles with a new type of engine, that is to say, a type of engine which has never before been installed in a type-approved vehicle;
- from 1 September 1972, to vehicles put into service for the first time;

Whereas those provisions are liable to hinder the establishment and proper functioning of the common market; whereas it is therefore necessary that all Member States adopt the same requirements, either in addition to or in place of their existing rules, in order, in particular, to allow the EEC type — approval procedure which was the subject of the Council Directive⁽³⁾ of 6 February 1970 on the approximation of the laws of the Member States relating to the type approval of motor vehicles and their trailers to be applied in respect of each type of vehicle;

Whereas, however, the present Directive will be applied before the date laid down for the application of the Directive of 6 February 1970; whereas at that time therefore the procedures of this last Directive will not yet be applicable; whereas therefore an *ad hoc* procedure must be laid down in the form of a communication certifying that a vehicle type has been tested and that it satisfies the requirements of this Directive;

Whereas, on the basis of that communication, each Member State requested to grant national type approval of a type of vehicle must be able to ascertain whether that type has been submitted to the tests laid down in this Directive; whereas, to this end, each Member State should inform the other Member States of its findings by sending them a copy of the communication completed for each type of motor vehicle which has been tested;

Whereas a longer period of adaptation should be laid down for industry in respect of the requirements relating to the testing of the average emission of gaseous pollutants in a congested urban area after a cold

⁽¹⁾ OJ No C 160, 18.12.1969, p. 7.

⁽²⁾ OJ No C 48, 16.4.1969, p. 16.

⁽³⁾ OJ No L 42, 23.2.1970, p. 1.

▼B

start than in respect of the other technical requirements of this Directive;

Whereas it is desirable to use the technical requirements adopted by the UN Economic Commission for Europe in its Regulation No 15⁽¹⁾ (Uniform provisions concerning the approval of vehicles equipped with a positive-ignition engine with regard to the emission of gaseous pollutants by the engine), annexed to the Agreement of 20 March 1958 concerning the adoption of uniform conditions of approval and reciprocal recognition of approval for motor vehicle equipment and parts;

Whereas, furthermore, the technical requirements must be rapidly adapted to take account of technical progress; whereas, to this end, provision should be made for application of the procedure laid down in Article 13 of the Council Directive of 6 February 1970 on the type approval of motor vehicles and their trailers;

HAS ADOPTED THIS DIRECTIVE:

Article 1

For the purposes of this Directive, 'vehicle' means any vehicle with a positive-ignition engine, intended for use on the road, with or without bodywork, having at least four wheels, a permissible maximum weight of at least 400 kg and a maximum design speed equal to or exceeding 50 km/h, with the exception of agricultural tractors and machinery and public works vehicles.

Article 2

No Member State may refuse to grant EEC type approval or national type approval of a vehicle on grounds relating to air pollution by gases from positive-ignition engines of motor vehicles:

- from 1 October 1970, where that vehicle satisfies both the requirements contained in Annex I, with the exception of those in items 3.2.1.1 and 3.2.2.1, and the requirements contained in Annexes II, IV, V and VI;
- from 1 October 1971, where that vehicle satisfies, in addition, the requirements contained in items 3.2.1.1 and 3.2.2.1 of Annex I and in Annex III.

▼A1*Article 2a*

No Member State may refuse or prohibit the sale or registration, entry into service or use of a vehicle on grounds relating to air pollution by gases from positive-ignition engines of motor vehicles if that vehicle satisfies the requirements set out in Annexes I, II, III, IV, V and VI.

▼B*Article 3*

1. On application being made by a manufacturer or his authorised representative, the competent authorities of the Member State concerned shall complete the sections of the communication provided for in Annex VII. A copy of that communication shall be sent to the other Member States and to the applicant. Other Member States which are requested to grant national type approval for the same type of vehicle shall accept that document as proof that the tests provided for have been carried out.

2. The provisions of paragraph 1 shall be revoked as soon as the Council Directive of 6 February 1970 on the type approval of motor vehicles and their trailers enters into force.

⁽¹⁾ ECE (Geneva) Document W/TRANS/WP 29/293/Rev. 1, 11.4.1969.

▼B*Article 4*

The Member State which has granted type approval shall take the necessary measures to ensure that it is informed of any modification of a part or characteristic referred to in item 1.1 of Annex I. The competent authorities of that Member State shall determine whether fresh tests should be carried out on the modified prototype and whether a fresh report should be drawn up. Where such tests reveal failure to comply with the requirements of this Directive, the modification shall not be approved.

Article 5

The amendments necessary for adjusting the requirements of Annexes I to VII so as to take account of technical progress shall be adopted in accordance with the procedure laid down in Article 13 of the Council Directive of 6 February 1970 on the type approval of motor vehicles and their trailers.

Article 6

1. Member States shall adopt provisions containing the requirements needed in order to comply with this Directive before 30 June 1970 and shall forthwith inform the Commission thereof.
2. Member States shall ensure that they communicate to the Commission the text of the main provisions of national law which they adopt in the field covered by this Directive.

Article 7

This Directive is addressed to the Member States.

▼B

ANNEX I

DEFINITIONS, APPLICATION FOR TYPE APPROVAL AND TEST SPECIFICATIONS

1. DEFINITIONS

1.1. **Vehicle type with regard to the limitation of the emission of gaseous pollutants from the engine**

‘Vehicle type with regard to the limitation of the emission of gaseous pollutants from the engine’ means vehicles which do not differ in essential respects, in particular as regards the following points:

- 1.1.1. The equivalent inertia determined in relation to the ►M3 reference mass ◀, as laid down in item 4.2 of Annex III;
- 1.1.2. The engine characteristics as defined in items 1-6 and 8 of Annex II.

▼M31.2. **Reference mass**

‘Reference mass’ means the mass of the vehicle in running order less the uniform mass of the driver of 75 kg and increased by a uniform mass of 100 kg.

- 1.2.1. ‘Mass of the vehicle in running order’ means the mass defined under point 2.6 of Annex I to Directive 70/156/EEC.

▼B1.3. **Engine crankcase**

‘Engine crankcase’ means the spaces in or external to an engine which are connected to the oil sump by internal or external ducts through which gases and vapours can escape.

▼M21.4. **Gaseous pollutants**

‘Gaseous pollutants’ means carbon monoxide, hydrocarbons and nitrogen oxides, the latter expressed as nitrogen dioxide (NO₂) equivalents.

▼B1.5. ►M3 **Maximum mass** ◀

‘►M3 Maximum mass ◀’ means the technically permissible ►M3 maximum mass ◀ declared by the vehicle manufacturer (this mass may be greater than the permissible ►M3 maximum mass ◀).

2. APPLICATION FOR TYPE APPROVAL

- 2.1. The following particulars must be submitted by the manufacturer or his authorised representative:
 - 2.1.1. A description of the engine type, including all the particulars referred to in Annex II;
 - 2.1.2. Drawings of the combustion chamber and of the piston, including the piston rings;
 - 2.1.3. Maximum lifts of valves and angles of opening and closing in relation to dead centres.
- 2.2. A vehicle representative of the vehicle type to be approved shall be submitted to the technical service conducting the tests referred to in item 3.

3. TEST SPECIFICATIONS

3.1. **General**

The components liable to affect the emission of gaseous pollutants shall be so designed, constructed and assembled as to enable the

▼ **B**

vehicle, in normal use, despite the vibration to which it may be subjected, to comply with the requirements of this Directive.

3.2. **Description of tests**

3.2.1. The vehicle shall be subjected, according to its weight category, to Types I, II and III tests, as specified below:

3.2.2.1. *Type I test* (verifying the average emission of gaseous pollutants in a congested urban area after a cold start).

3.2.1.1.1. This test shall be carried out on all vehicles referred to in Article 1 whose ► **M3** maximum mass ◀ does not exceed 3·5 metric tons.

3.2.1.1.2. The vehicle shall be placed on a dynamometer bench equipped with a brake and a flywheel. A test lasting a total of thirteen minutes and comprising four cycles shall be carried out without interruption. Each cycle shall comprise 15 phases (idling, acceleration, steady speed, deceleration, etc.). During the test the exhaust gases shall be collected in one or more bags. The gases shall be analysed and their volume measured at the end of the filling period.

3.2.1.1.3. The test shall be carried out by the procedure described in Annex III. The methods used to collect and analyse the gases shall be those laid down. Other methods may be approved if it is found that they yield equivalent results.

▼ **M1**

3.2.1.1.4. Subject to the provisions of item 3.2.1.1.5 below, the test shall be performed three times. ► **M2** In each test, the mass of the carbon monoxide, the mass of the hydrocarbons and the mass of the nitrogen oxides obtained must be less for a vehicle of given ► **M3** reference mass ◀, than the amounts shown in the table below: ◀

▼ **M3**

Reference mass (kilograms)	Mass of carbon monoxide (grams per test)	Mass of hydrocarbons (grams per test)	Mass of nitrogen oxides expressed in NO ₂ equivalent (grams per test)
RW	L1	L2	L3
RW ≤ 750	65	6·0	8·5
750 < RW ≤ 850	71	6·3	8·5
850 < RW ≤ 1 020	76	6·5	8·5
1 020 < RW ≤ 1 250	87	7·1	10·2
1 250 < RW ≤ 1 470	99	7·6	11·9
1 470 < RW ≤ 1 700	110	8·1	12·3
1 700 < RW ≤ 1 930	121	8·6	12·8
1 930 < RW ≤ 2 150	132	9·1	13·2
2 150 < RW	143	9·6	13·6

3.2.1.1.4.1. However, until 1 October 1981, for type-approval in respect of emissions of vehicles of category M₁ equipped with automatic transmissions, the limits L3 for nitrogen-oxide emissions given in the table in point 3.2.1.1.4 shall be multiplied by the factor 1·25.

Concerning vehicles other than those of category M₁, the limits for nitrogen-oxide emissions remain those given in point 3.2.1.1.4 of Directive 77/102/EEC, multiplied by the factor 1·25.

▼ **M1**

► **M2** 3.2.1.1.4.2. ◀ Nevertheless, for each of the pollutants referred to in 3.2.1.1.4, one of the three results obtained may exceed, by not more than 10 %, the limit laid down in that item for the vehicle concerned, on condition that the arithmetic mean of the three results is below the prescribed limit. Where the prescribed limits are exceeded for more than one pollutant, it shall be immaterial whether this occurs in the same test or in different tests.

3.2.1.1.5. The number of tests laid down in item 3.2.1.1.4 shall be reduced in the cases hereinafter defined, V₁ being the result of the first test and V₂ the result of the second test for any of the pollutants mentioned in item 3.2.1.1.4.

3.2.1.1.5.1. Only one test shall be made if, for ► **M2** the three pollutants ◀ concerned, V₁ ≤ 0·70 L.

▼M1

- 3.2.1.1.5.2. Only two tests shall be made if, for ►M2 the three pollutants ◀ concerned, $V_1 \leq 0.85$ L but for at least one of the pollutants $V_1 > 0.70$ L. In addition, for each of the pollutants concerned, V_2 must satisfy the requirements $V_1 + V_2 \leq 1.70$ L and $V_2 \leq L$.

▼B

- 3.2.1.2. *Type II test* (carbon-monoxide emission test at idling speed).
3.2.1.2.1. This test shall be carried out on all vehicles referred to in Article 1.

▼M3

- 3.2.1.2.2. The carbon monoxide content by volume of the exhaust gases emitted with the engine idling must not exceed 3.5 %. When a check is made in accordance with the provisions of Annex IV, under operating conditions not in conformity with the standards recommended by the manufacturer (configuration of the adjustment components), the maximum content measured by volume shall not exceed 4.5 %.

▼B

- 3.2.1.2.3. This content shall be checked through a test carried out in accordance with the procedure described in Annex IV.
3.2.1.3. *Type III test* (verifying emissions of crankcase gases).
3.2.1.3.1. This test shall be carried out on all vehicles referred to in Article 1 with the exception of those having a two-stroke engine with compression in the crankcase.
3.2.1.3.2. The mass of the hydrocarbons contained in the crankcase gases which are not recycled by the engine must be less than 0.15% of the mass of the fuel consumed by the engine.
3.2.1.3.3. This mass shall be checked through a test carried out in accordance with the procedure described in Annex V.

▼M1

4. EXTENSION OF EEC TYPE-APPROVAL

4.1. **Vehicle types of different ►M3 reference masses ◀**

Approval of a vehicle type may, under the following conditions, be extended to vehicle types which differ from the approved type only in respect of their ►M3 reference mass ◀.

- 4.1.1. Approval may be extended to vehicle types of a ►M3 reference mass ◀ requiring merely the use of the next higher or next lower equivalent inertia.
4.1.2. If the ►M3 reference mass ◀ of the vehicle type for which extension of the approval is requested requires the use of a flywheel of equivalent inertia higher than that used for the vehicle type already approved, extension of the approval shall be granted.
4.1.3. If the ►M3 reference mass ◀ of the vehicle type for which extension of the approval is requested requires the use of a flywheel of equivalent inertia lower than that used for the vehicle type already approved, extension of the approval shall be granted if the masses of the pollutants obtained from the vehicle already approved are within the limits prescribed for the vehicle for which extension of the approval is requested.

4.2. **Vehicle types with different overall gear rates**

Approval granted in respect of one vehicle type may, under the following conditions, be extended to vehicle types which differ from the approved type only in respect of their overall transmission ratios:

- 4.2.1. For each transmission ratio used in the Type I test, the equation $E = \frac{V_2 - V_1}{V_1}$ shall be determined where V_1 and V_2 are, respectively, the speed at 1 000 rpm of the engine of the approved vehicle type and of the vehicle type for which extension of the approval is requested.
4.2.2. If for each gear ratio ►M3 $E \leq 8$ % ◀, extension shall be granted without repeating the Type I tests.

▼M1

4.2.3. If for at least one gear ratio ►M3 $E > 8\%$ ◄, and if for each gear ratio ►M3 $E \leq 13\%$ ◄, the Type I tests shall be repeated but may be performed in a laboratory chosen by the manufacturer, subject to the agreement of the authorities competent to grant type-approval. The report on the tests shall be sent to the approved laboratory.

4.3. **Vehicle types of different ►M3 reference masses ◄ and different overall transmission ratios**

Approval granted in respect of one type of vehicle may be extended to vehicle types which differ from the approved type only in respect of their ►M3 maximum masses ◄ and their overall transmission ratios, where all the conditions laid down in items 4.1 and 4.2 above are fulfilled.

4.4. **Note**

When a vehicle type has been approved under the provisions of items 4.1 to 4.3 above, such type approval may not be extended to other vehicle types.

5. CONFORMITY OF PRODUCTION

5.1. As a general rule, conformity of production models, with regard to limitation of the emission of gaseous pollutants from the engine, shall be checked on the basis of the description in the communication set out in Annex VII and, where necessary, of all or some of the tests of Types I, II and III described in item 3.2.

5.1.1. Conformity of the vehicle in a Type I test shall be checked as follows:

5.1.1.1. A vehicle shall be taken from the series and subjected to the test described in item 3.2.1.1. However, the limits shown in item 3.2.1.1.4 shall be replaced by the following:

▼M3

Reference mass (kilograms)	Mass of carbon monoxide (grams per test)	Mass of hydrocarbons (grams per test)	Mass of nitrogen oxides expressed in NO ₂ equivalent (grams per test)
RW	L1	L2	L3
≤ 750	78	7.8	10.2
750 < RW ≤ 850	85	8.2	10.2
850 < RW ≤ 1 020	91	8.5	10.2
1 020 < RW ≤ 1 250	104	9.2	12.2
1 250 < RW ≤ 1 470	119	9.9	14.3
1 470 < RW ≤ 1 700	132	10.5	14.8
1 700 < RW ≤ 1 930	145	11.2	15.4
1 930 < RW ≤ 2 150	158	11.8	15.8
2 150 < RW	172	12.5	16.3

5.1.1.1.1. For vehicles of category M₁ equipped with automatic transmissions which have been granted type-approval in respect of emissions before 1 October 1981, the limits L3 for nitrogen-oxide emissions given in the table in point 5.1.1.1 of this Directive shall be multiplied by the factor 1.25.

Concerning vehicles other than those of category M₁, the limits for nitrogen-oxide emissions remain those given in point 5.1.1.1 of Directive 77/102/EEC, multiplied by the factor 1.25.

▼M1

5.1.1.2. If the vehicle selected does not meet the requirements of item 5.1.1.1, the manufacturer may ask for measurements to be made on a sample of vehicles taken from the series, including the vehicle originally tested. The manufacturer shall determine the size n of the sample. Vehicles other than the vehicle originally selected shall be subjected to a single Type I test.

▼ **M1**

The result to be taken into account for the vehicle originally tested shall be the arithmetic mean of the results of the three Type I tests carried out on the vehicle. The arithmetic mean \bar{x} of the results obtained with the sample and the standard deviation $S^{(1)}$ of the sample shall then be determined for each gaseous pollutant.

The production of the series shall then be deemed to conform if the following condition is met:

$$\bar{x} + k \cdot S \leq L$$

where

L = the limit value laid down in item 5.1.1.1 for each gaseous pollutant considered; and

k = a statistical factor dependent on n and given in the following table:

n	2	3	4	5	6	7
k	0.973	0.613	0.489	0.421	0.376	0.342
n	8	9	10	11	12	13
k	0.317	0.296	0.279	0.265	0.253	0.242
n	14	15	16	17	18	19
k	0.233	0.224	0.216	0.210	0.203	0.198

$$\text{If } n \geq 20 \quad k = \frac{0.860}{\sqrt{n}}$$

- 5.1.2. In a Type II or Type III test carried out on a vehicle taken from the series, the conditions laid down in items 3.2.1.2.2 and 3.2.1.3.2 shall be complied with.
- 5.1.3. Notwithstanding the requirements of item 2.1.1 of Annex III, the technical department responsible for checking conformity of production may, with the consent of the manufacturer, carry out tests of Types I, II and III on vehicles which have been driven less than 3 000 km.

(1) $S^2 = \sum \frac{(x - \bar{x})^2}{n - 1}$, where x is any one of the individual results obtained with the sample n.

▼ **B**

ANNEX II

ESSENTIAL CHARACTERISTICS OF THE ENGINE AND INFORMATION CONCERNING THE
CONDUCT OF TESTS¹

1. Description of engine
 - 1.1. Make
 - 1.2. Type
 - 1.3. Cycles: four-stroke/two-stroke²
 - ▶⁽¹⁾ 1.4. Number and arrangement of cylinders
 - 1.5. Bore mm
 - 1.6. Stroke mm
 - 1.7. Cylinder capacity cm³
 - 1.8. Compression ratio³
 - 1.9. System of cooling
 - 1.10. Supercharger with/without² description of the system
 - 1.11. Device for recycling crankcase gases (description and diagrams)
 - 1.12. Air filter: drawings, or makes and types
2. Additional anti-pollution devices (if any, and if not covered by another heading)
Description and diagrams
3. Air intake and fuel feed
 - 3.1. Description and diagrams of air intakes and their accessories (dashpot, heating device, additional air intakes, etc.)
 - 3.2. Fuel feed
 - 3.2.1. By carburettor(s)² Number
 - 3.2.1.1. Make
 - 3.2.1.2. Type
 - 3.2.1.3. Adjustments²

<ol style="list-style-type: none"> 3.2.1.3.1. Jets 3.2.1.3.2. Venturis 3.2.1.3.3. Float-chamber level 3.2.1.3.4. Weight of float 3.2.1.3.5. Float needle 	} or {	<ol style="list-style-type: none"> ▶⁽²⁾ Fuel delivery curve plotted against air flow, and settings required to maintain the curve² ◀
---	--------	---
 - ▶⁽³⁾ 3.2.1.3.6. Idling system. Description of settings and relevant requirements in order to comply with point 3.2.1.2.2 of Annex I (configuration of adjustment components). ◀
 - 3.2.1.4. Manual/automatic choke² Closure setting³
 - 3.2.1.5. Feed pump
Pressure³ or characteristic diagram³
 - 3.2.2. By injector²
 - 3.2.2.1. Pump

¹ In the case of non-conventional engines and systems, particulars equivalent to those referred to here shall be supplied.² Delete as appropriate.³ Specify the tolerance.▶⁽¹⁾⁽²⁾ **MI**▶⁽³⁾ **M3**

▼ **B**

- 3.2.2.1.1. Make
- 3.2.2.1.2. Type
- 3.2.2.1.3. Delivery mm³ per stroke at pump speed of rpm,^{1 2} or characteristic diagram^{1 2}
- 3.2.2.2. Injector(s)
- 3.2.2.2.1. Make
- 3.2.2.2.2. Type
- 3.2.2.2.3. Calibration bars^{1 2}
or characteristic diagram^{1 2}
- 4. Valve timing**
- 4.1. Maximum lift of valves and angles of opening and closing in relation to dead centres
- 4.2. Reference and/or setting ranges¹
- 5. Ignition**
- 5.1. Distributor(s)
- 5.1.1. Make
- 5.1.2. Type
- 5.1.3. Ignition advance curve²
- 5.1.4. Ignition timing²
- 5.1.5. Contact-point gap²
- 6. Exhaust system**
- Description and diagrams
- 7. Additional information on test conditions**
- 7.1. Lubricant used
- 7.1.1. Make
- 7.1.2. Type
- (State percentage of oil in fuel if any lubricant is mixed with the fuel)
- 7.2. Sparking plugs
- 7.2.1. Make
- 7.2.2. Type
- 7.2.3. Spark-gap setting
- 7.3. Ignition coil
- 7.3.1. Make
- 7.3.2. Type
- 7.4. Ignition condenser
- 7.4.1. Make
- 7.4.2. Type
- 8. Engine performances**
- 8.1. Idling speed rpm²
- ▶⁽¹⁾ 8.1.1. Carbon monoxide content by volume in the exhaust gas, with the engine idling ... % (manufacturer's standard).◀
- 8.2. Engine speed at maximum power rpm²
- 8.3. Maximum power ▶⁽²⁾kw◀ (ISO; BSI; CUNA; DIN; IGM; SAE; etc.)¹;

¹ Delete as appropriate.² Specify the tolerance.

▼B*ANNEX III***TYPE I TEST**

(verifying the average emission of pollutants in a congested urban area after a cold start)

Procedure for Type I test specified in item 3.2.1.1. of Annex I

1. OPERATING CYCLE ON THE DYNAMOMETER BENCH

1.1. **Description of cycle**

The operating cycle on the dynamometer bench shall be that indicated in the following table and plotted in Appendix 1. The analysis by operations is given in Appendix 2.

Operating cycle on the dynamometer bench

No of operation	Operation	Phase	Acceleration m/sec ²	Speed km/h	Duration of each		Cumulative time (sec)	Gear to be used in the case of a manual gearbox
					Operation (sec)	Phase (sec)		
1	Idling	1			11	11	11	6 sec PM + 5 sec K ₁ (1)
2	Acceleration	2	1.04	0—15	4	4	15	1
3	Steady speed	3		15	8	8	23	1
4	Deceleration	4	- 0.69	15—10	2	5	25	1
5	Deceleration, clutch disengaged	5	- 0.92	10—0	3	21	28	K ₁
6	Idling				21	21	49	16 sec PM + 5 sec K ₁
7	Acceleration	6	0.83	0—15	5	5	54	1
8	Gear change				2	12	56	
9	Acceleration	7	0.94	15—32	5	5	61	2
10	Steady speed			32	24	24	85	2
11	Deceleration	8	- 0.75	32—10	8	11	93	2
12	Deceleration, clutch disengaged	9	- 0.92	10—0	3	21	96	K ₂
13	Idling				21	21	117	16 sec PM + 5 sec K ₁
14	Acceleration	10	0.83	0—15	5	5	122	1
15	Gear change				2	26	124	
16	Acceleration		0.62	15—35	9	9	133	2
17	Gear change				2	2	135	
18	Acceleration		0.52	35—50	8	8	143	3
19	Steady speed	11		50	12	12	155	3
20	Deceleration	12	- 0.52	50—35	8	8	163	3
21	Steady speed	13		35	13	13	176	3
22	Gear change				2	2	178	
23	Deceleration	14	- 0.86	32—10	7	12	185	2
24	Deceleration, clutch disengaged		- 0.92	10—0	3	3	188	K ₂

No of operation	Operation	Phase	Acceleration m/sec ²	Speed km/h	Duration of each		Cumulative time (sec)	Gear to be used in the case of a manual gearbox
					Operation (sec)	Phase (sec)		
25	Idling	15			7	7	195	7 sec PM

(1) PM = Gearbox in neutral, clutch engaged.

K₁, K₂ = First or second gear engaged, clutch disengaged.

▼B**1.2. General conditions for carrying out the cycle**

Preliminary testing cycles should be carried out if necessary to determine how best to actuate the accelerator and brake controls so as to achieve a cycle approximating to the theoretical cycle within the prescribed limits.

1.3. Use of the gearbox

1.3.1. If the maximum speed which can be attained in first gear is below 15 km/h, the second, third and fourth gears shall be used.

►M3 The second, third and fourth gears may also be used when the driving instructions recommend starting in second gear on level ground, or when first gear is therein defined as a gear reserved for cross-country driving, crawling or towing. ◀

1.3.2. Vehicles equipped with semi-automatic gearboxes shall be tested by using the ratios normally employed for driving, and the gear lever shall be operated in accordance with the manufacturer's instructions.

1.3.3. Vehicles equipped with fully automatic gearboxes shall be tested with the highest gear ('Drive') engaged. The accelerator shall be operated so as to obtain the steadiest acceleration possible, allowing the various gears to be engaged in the normal order. Furthermore, the gear-change points shown in Appendix 1 shall not apply; acceleration shall continue throughout the period represented by the straight lines connecting the end of each period of idling with the beginning of the next period of steady speed. The tolerances given in item 1.4 shall apply.

1.3.4. Vehicles equipped with an overdrive which can be actuated by the driver shall be tested with the overdrive out of action.

1.4. Tolerances

1.4.1. A tolerance of 1 km/h above or below the theoretical speed shall be allowed during acceleration during steady speed, and during deceleration when the vehicle's brakes are applied. If the vehicle decelerates more rapidly without the use of the brakes, only the requirements of item 5.6.3 shall apply. Speed tolerances greater than those prescribed shall be permitted during phase changes provided that the tolerances are never exceeded for more than 0.5 second on any one occasion.

1.4.2. Time tolerances of ± 0.5 sec. These tolerances shall apply at the beginning and at the end of each gear-changing period⁽¹⁾.

1.4.3. The speed and time tolerances shall be combined as indicated in Appendix 1.

2. VEHICLE AND FUEL**2.1. Test vehicle**

2.1.1. The vehicle shall be presented in good mechanical condition. It shall have been run in and have been driven at least 3 000 km before the test.

2.1.2. The exhaust device shall not have any leaks likely to reduce the quantity of gases collected, which shall be the quantity of gases emerging from the engine.

2.1.3. The tightness of the admission system may be checked to ensure that carburation is not affected by an accidental intake of air.

2.1.4. The settings of the engine and of the vehicle's controls shall be those prescribed by the manufacturer. ►M3 This requirement also applies, in particular, to the settings for idling (rotational speed and carbon monoxide content of the exhaust gases), for the automatic choke and for the exhaust-gas cleaning system. ◀

▼M3

2.1.5. The intake system of the vehicle tested shall be fitted, beyond the throttle, with a connection making it possible to measure accurately the vacuum in the intake pipe.

⁽¹⁾ It should be noted that the time of two seconds allowed includes the time for changing gear and, if necessary, a certain amount of latitude to catch up with the cycle.

▼B

- 2.1.6. The laboratory may verify that the vehicle conforms to the performances stated by the manufacturer, that it can be used for normal driving, and more particularly that it is capable of starting when cold and when hot.

▼M3

- 2.1.7. Vehicles designed to operate with catalytic converters shall be tested with the catalyst removed although these devices may be fitted to vehicles produced to the type approved.

▼B2.2. **Fuel**

- 2.2.1. The fuel shall be the reference fuel whose specifications are given in Annex VI. If the engine is lubricated by a mixture, the oil added to the reference fuel shall comply as to grade and quantity with the manufacturer's recommendations.

3. TEST EQUIPMENT

3.1. **Dynamometer brake**

No particular model is prescribed. However, its adjustment shall not be affected by the lapse of time. It shall not produce any perceptible vibrations in the vehicle likely to impair the latter's normal operation. It must be equipped with an inertia adapter enabling the operation of the vehicle on the road to be reproduced (equivalent inertias).

3.2. **Gas-collection equipment**

- 3.2.1. **►M2** The connecting tubes shall be made of stainless steel and shall, so far as possible, be provided with rigid connections. **◄** However, a completely gas-tight flexible ring element shall be used to isolate the device from the vehicle vibrations. Other materials may be used if they do not affect the composition of the gases.
- 3.2.2. If the vehicle being tested is equipped with an exhaust pipe comprising several branches, the branches shall be interlinked as near as possible to the vehicle.
- 3.2.3. The temperature of the gases in the collecting system shall be compatible with the correct operation of the engine, with maintenance of the sampling bags in good condition, with the hydrocarbon absorption level laid down in item 4.5.1 **►M2** **◄**.

▼M3

- 3.2.4. A cooling condenser shall be installed between the tail pipe and the inlet valve to the bag or bags, so that the temperature of the gases at the condenser outlet is not reduced below 5 °C. The cooling system should be such as to avoid any condensed water entrainment by the gases flowing through it, and the humidity of the gases in the collecting bag or bags must be less than 90 % at 20 °C.

▼M2

- 3.2.5. The total volume of the collecting system, excluding the bag, shall not exceed 0.08 m³. **►M3** The volume of the section of the sampling tube leading into the bag shall be less than 0.03 m³. **◄**

▼B

- M2** 3.2.6. **◄** The various valves used to direct the exhaust gases either to the atmosphere or to the sampling device shall be quickly adjustable and quick-acting.
- M2** 3.2.7. **◄** The collecting device shall comprise one or more bags of adequate capacity. The bags shall be made of such materials as will not affect either the accuracy of the measurements or the conservation of the gases.

3.3. **Analytical equipment**

- 3.3.1. The sampling probe may consist of the sampling tube leading into the collecting device or of the bag-emptying tube. It may also be independent but in no case shall its opening be at the bottom of the bag.
- 3.3.2. **►M2** The carbon monoxide and hydrocarbon analysers shall be of the non-dispersive type with absorption in the infra-red. **◄** The hydrocarbons analyser shall be sensitised for n-hexane.

▼ M2

- 3.3.3. The nitrogen oxides shall be analysed as follows:
- 3.3.3.1. The gases contained in the bag shall pass through a converter which reduces the nitrogen dioxide (NO₂) to nitric oxide (NO).
- 3.3.3.2. The nitric oxide (NO) content of the gases emerging from the converter shall be determined by means of a chemiluminescence analyser.
- 3.3.3.3. No gas-drying device (ice-trap) must be used upstream of the analyser.

▼ B**3.4. Volume-measuring equipment**

- 3.4.1. A volumetric gauge shall be used.
- 3.4.2. Pressure and temperature measurements enabling the volume to be referred to standard conditions shall be carried out at points selected in the light of the type of gauge used. The laboratory shall specify their positions.
- 3.4.3. The gas-bleeding device may consist of a pump or of any other system which keeps the pressure measured at the gauge constant.

3.5. Accuracy of instruments

- 3.5.1. As the brake is calibrated in a separate test, the accuracy of the dynamometer is not indicated. The total inertia of the rotating masses, including that of the rollers and the rotating part of the brake (see item 4.2), shall be given to within ± 20 kg.
- 3.5.2. The speed of the vehicle shall be measured by the speed of rotation of the rollers connected to the brake flywheels. It shall be measurable to within ± 2 km/h in the speed range 0 to 10 km/h and to within ± 1 km/h for speeds above 10 km/h.
- 3.5.3. The temperatures considered in items 5.1.1 and 6.3.3 shall be measurable to within ± 2 °C.
- 3.5.4. The atmospheric pressure shall be measurable to within $\pm \blacktriangleright \underline{\text{M3}} 1.33$ mbar \blacktriangleleft .
- 3.5.5. The vacuum in the vehicle's intake system shall be measurable to within $\pm \blacktriangleright \underline{\text{M3}} 6.67$ mbar \blacktriangleleft . The other pressures (backpressure in the sampling device, pressure for correction of volume etc.) must be measurable to within $\pm \blacktriangleright \underline{\text{M3}} 0.49$ mbar \blacktriangleleft .
- 3.5.6. The size and accuracy of the gauge shall be appropriate to the volume of gas to be measured, so that the measurement of volume is accurate to within $\pm 2\%$.

▼ M2

- 3.5.7. The converter must be least 90 % efficient.

▼ B

- $\blacktriangleright \underline{\text{M2}}$ 3.5.8. \blacktriangleleft The analysers shall have a measuring range compatible with the accuracy required to measure the content of the various constituents to within $\pm 3\%$, disregarding the accuracy of the standard (calibration) gases. The overall response time of the analysing circuit shall be less than one minute.
- $\blacktriangleright \underline{\text{M2}}$ 3.5.9. \blacktriangleleft The content of the standard gases shall not differ by more than $\pm 2\%$ from the reference value of each gas. The diluent shall be nitrogen.

4. PREPARING THE TEST**4.1. Setting of brake**

- 4.1.1. The brake shall be so adjusted as to reproduce the operation of the vehicle on the level at a steady speed of 50 km/h.

▼ **M3**

4.1.2. The brake is adjusted in the following way:

▼ **B**

► **M3** 4.1.2.1. ◀ For this purpose the vacuum shall be measured at the engine intake during a road test carried out at 50 km/h in third gear, or using the gears specified in item 1.3, the vehicle being loaded to its ► **M3** maximum mass ◀ and the tyre pressure being that indicated by the manufacturer. The vacuum shall be measured when a steady speed on the level has been maintained for at least fifteen seconds. To take account of the effects of wind, the average of the results of measurements made twice in each direction shall be taken.

► **M3** 4.1.2.2. ◀ The vehicle shall then be placed on the dynamometer bench and the brake so adjusted as to obtain the same vacuum at the intake as that recorded in the road test referred to item 4.1.2 above. This brake setting shall be maintained throughout the test.

▼ **M1**

► **M3** 4.1.2.3. ◀ A check shall be made to verify that the setting of the brake so obtained is appropriate for other intermediate states between idling and the maximum speed in the cycle, if necessary, an average setting shall be adopted.

▼ **M3**

4.1.2.4. Other methods of measuring the power necessary for propelling the vehicle (e.g. driveline torque measurement, deceleration measurement, etc.) will also be permitted.

4.1.2.5. The brake can only be adjusted on the basis of road tests if the conditions of air pressure and temperature, on the road and at the location of the dynamometer bench, do not differ by more than ± 15 mbar and ± 8 °C.

4.1.3. If the preceding method is not applicable, the bench is regulated in order to absorb the power exerted by the driving wheels at a constant speed of 50 km/h in accordance with the provisions of the table in point 4.2. This power is determined according to the method indicated in Annex VII.

4.1.3.1. In the case of vehicles other than those of category M₁, vehicles with a reference mass of more than 1 700 kg, or vehicles all of whose wheels are driven, the power values given in the table shall be multiplied by the factor 1.3.

▼ **B**

4.2. **Adjustment of equivalent inertias to the vehicle's translatory inertias**

A flywheel shall be used enabling a total inertia of the rotating masses to be obtained proportional to the ► **M3** maximum mass ◀ within the following limits:

▼ **M3**

Reference mass (RW) of vehicle (kilograms)	Equivalent inertias (kilograms)	Power absorbed by the dynamometer (kilowatts)
≤ 750	680	1.8
$750 < RW \leq 850$	800	2.0
$850 < RW \leq 1\ 020$	910	2.2
$1\ 020 < RW \leq 1\ 250$	1 130	2.4
$1\ 250 < RW \leq 1\ 470$	1 360	2.7
$1\ 470 < RW \leq 1\ 700$	1 590	2.9
$1\ 700 < RW \leq 1\ 930$	1 810	3.1
$1\ 930 < RW \leq 2\ 150$	2 040	3.3
$2\ 150 < RW \leq 2\ 380$	2 270	3.5
$2\ 380 < RW \leq 2\ 610$	2 270	3.6
$2\ 610 < RW$	2 270	3.7

▼ **B**

4.3. **Conditioning of vehicle**

4.3.1. Before the test the vehicle shall be kept at a temperature of between 20 ° and 30 °C for at least six hours. The cooling-water and engine-oil temperatures shall be measured before the test to make sure that they are between 20 ° and 30 °C.

▼ B

4.3.2. The tyre pressure shall, as in the case of the preliminary road test for brake adjustment, be that indicated by the manufacturer. However, if the diameter of the rollers is less than 50 cm, the pressure in the tyres shall be increased by 30-50% to prevent damage to the tyres.

4.4. **Check of back-pressure**

During the preliminary tests a check shall be made to ensure that the back-pressure set up by the sampling device does not exceed ►**M3** 7.36 mbar ◀, measurements being performed at the various steady speeds prescribed in the cycle. ►**M3** For vehicles with a reference mass of more than 1 700 kg whose engine is fitted with a device for the dilution of exhaust gases (an air pump, for example), a back-pressure not exceeding 10 mbar is allowed. ◀

▼ M24.5. **Conditioning of bag(s)****▼ B**

4.5.1. ►**M2** The bag(s) shall ◀ be so conditioned, particularly with regard to hydrocarbons, that hydrocarbon losses over a period of 20 minutes do not exceed 2% of the initial content. This conditioning shall be carried out during preliminary tests conducted at temperatures close to the extreme temperatures encountered during the various tests.

4.5.2. Losses shall be measured as follows. When the engine is running at a constant (rpm) speed the hydrocarbon content of the gases entering the bag shall be measured continuously until the bag has been filled. The content, when filling is completed, must be the average of the contents recorded during filling. The bag shall be emptied by the analyser pumps and the content recorded continuously or at fixed intervals. If after twenty minutes the content has varied by more than 2%, the bag shall be emptied and then refilled for a second measurement. This cycle shall be repeated as many times as is necessary to saturate the walls.

▼ M2

4.5.3. Air must be blown into the bag(s) before each test in order to remove any residual moisture.

▼ B4.6. **Calibration of analytical apparatus****▼ M2**

4.6.1. Check on converter efficiency

The efficiency of the NO₂-NO converter shall be checked by one of the following two methods:


4.6.1.1. Method 'A'

4.6.1.1.1. A sampling bag which has not already been used to collect samples of exhaust gases shall be filled with air (or oxygen) and NO reference gas, which will be metered in such a way as to enable a mixture lying within the measuring range of the analyser to be obtained. Enough oxygen shall be added to enable a good proportion of the NO to be converted into NO₂.

4.6.1.1.2. The bag shall be shaken briskly and be immediately connected to the sample feed device on the analyser. The NO and NO_x concentrations shall be measured in turn at one-minute intervals_x by alternately passing the sample through the converter and through the bypass tube. After several minutes the presence of NO and NO_x will be recorded as shown in the diagram below if the converter is functioning properly. Although the quantity of NO₂ will be increasing, the sum NO_x = NO + NO₂ should remain constant. A reduction in the amount of NO_x as the operations proceed would be a sign that the efficiency of the converter was decreasing and the cause would have to be determined before the device was used.

▼ M2


Response rate of the check on converter efficiency

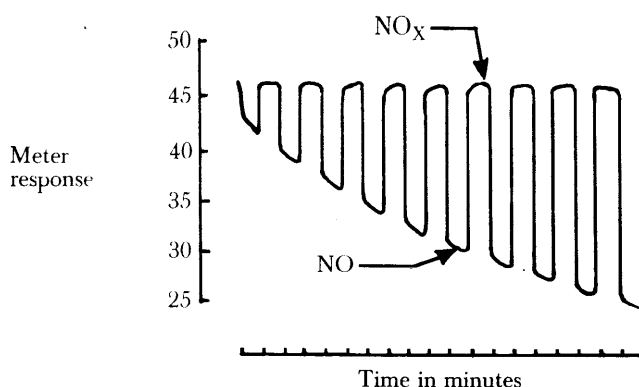

4.6.1.2. Method 'B'

The efficiency of the converter can be verified with the aid of an ozonizer in accordance with the diagram and method set out below:

Device for measuring converter efficiency

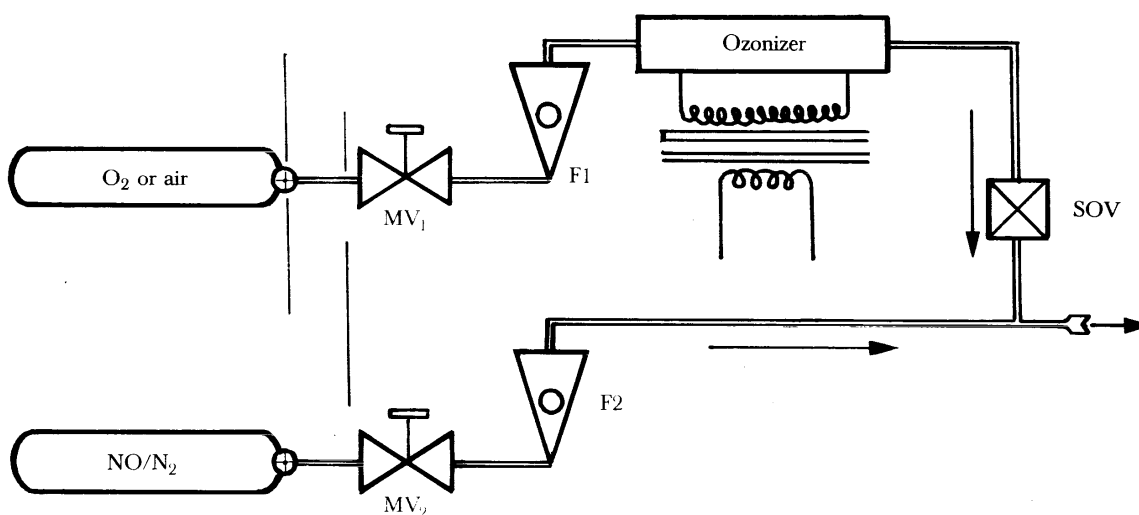

- 4.6.1.2.1. The NO analyser shall be connected to a T tube receiving on one side a supply of the calibration gas (mixture of NO in N₂ in a proportion corresponding to about 80% of the full-scale value of the instrument) and from the other side a supply of ozonized oxygen or air (depending on the NO concentration). The inlet pipe for the supply of O₂ shall be provided with a shut-off valve (SOV) and each of the inlet pipes shall also be connected to a metering valve (MV) and a flowmeter (F).
- 4.6.1.2.2. At the beginning of the check the SOV shall be closed and MV2 set in such a way as to obtain a steady reading from the chemiluminescent instrument set to 'bypass'. The device shall be spanned and calibrated in such a way that it correctly indicates the concentration of the gas sample used. Note reading (A).
- 4.6.1.2.3. With the ozonizer off the SOV shall be opened and the O₂ flow rate regulated in such a way as to reduce the figure indicated by the analyser by about 10%. This figure (B) shall be noted. The ozonizer shall be switched on and its voltage regulated so that the instrument reading falls to about 20 % of the initial value obtained with the non-diluted gas. The figure indicated (C) shall be noted.
- 4.6.1.2.4. The analyser shall be switched to 'convert' and the reading (D) shall again be noted. The ozonizer shall be switched off and the new reading (E) noted. The SOV shall be closed and the new reading (F) of the instrument noted. The latter reading must be identical with the

▼ M2

initial value (A) unless the gas sample contains NO₂, in which case the figure indicated will be higher.

- 4.6.1.2.5. The efficiency of the converter (expressed as a percentage) shall be given by

$$\frac{D - C}{E - C} \times 100.$$

- 4.6.1.3. The efficiency of the converter must be checked at least once a week and preferably once a day.

▼ B

- **M2** 4.6.2. ◀ Calibration of analysers.

The quantity of gas at the indicated pressure compatible with the correct functioning of the equipment shall be injected into the analyser by means of the discharge gauge and the pressure-reducing valve mounted on each bottle. The apparatus shall be adjusted to indicate as a stabilised value the value shown on the standard-gas bottle. Starting from the setting obtained with the maximum-content bottle, the curve of the analyser's deviations shall be drawn as a function of the content of the various standard-gas bottles used.

- **M2** 4.6.3. ◀ Overall response time of the apparatus.

The gas from the maximum-content bottle shall be injected into the end of the sampling probe. A check shall be made to ensure that the indicated value corresponding to maximum deviation is attained in less than one minute. If this value is not attained, the analysing circuit shall be inspected from end to end for leaks.

4.7. **Adjustment of volume-measuring device**

The bag shall be filled during the preliminary tests and a check made to ensure that the volume can be measured with the desired accuracy. If necessary, a suitable (gas) gauge shall be selected in each case.

5. **PROCEDURE FOR BENCH TESTS**

5.1. **Special conditions for carrying out the cycle**

- 5.1.1. The temperature in the place where the roller bench is situated shall be between 20 ° and 30 °C throughout the test and approximate as closely as possible that of the place where the vehicle was conditioned for the test.
- 5.1.2. The vehicle shall be more or less horizontal during the test so as to avoid any abnormal distribution of the fuel.
- 5.1.3. The test shall be carried out with the bonnet raised. An auxiliary ventilating device acting on the radiator (water-cooled) or on the air intake (air-cooled) may be used, if necessary, to keep the engine temperature normal.
- 5.1.4. When the cycle is carried out the speed considered shall be that of the rollers connected to the brake flywheel. During the test the speed shall be plotted against time so that the correctness of the cycles performed can be assessed.
- 5.1.5. Recording of the vacuum shall be optional; however, if it is recorded at the same time as the speed, it will be possible to judge whether the accelerations have been made correctly.
- 5.1.6. The temperatures of the cooling water and of the crankcase oil may also be recorded if desired.

5.2. **Starting up the engine**

- 5.2.1. The engine shall be started up by means of the devices provided for this purpose, such as the choke, the starter valve, etc., according to the manufacturer's instructions.
- 5.2.2. The engine shall be kept idling on the choke for a period of forty seconds. The first cycle shall begin when the valve of the effluent-recovery device is operated, which shall be done at the end of the forty-second period.

▼M1**5.3. Use of the choke****5.3.1. Manual choke**

The choke shall be cut out as soon as possible, and in principle before acceleration from 0 to 50 km/h of the first cycle. If this requirement cannot be met, the moment of effective cutout shall be indicated. The method used to adjust the choke shall be that indicated by the manufacturer.

5.3.2. Automatic choke

If the vehicle is fitted with an automatic choke, it must be driven as indicated by the manufacturer as regards setting and kick-down following a cold start. If the kick-down point is not indicated, it must take place 13 seconds after the engine has commenced running.

▼B**5.4. Idling****5.4.1. Manual-shift gearbox:**

5.4.1.1. During periods of idling the clutch shall be engaged and the gears in neutral.

5.4.1.2. To enable the accelerations to be performed according to the normal cycle the vehicle shall be put in first gear, with the clutch disengaged, five seconds before the acceleration following the idling period in question.

5.4.1.3. The first idling period at the beginning of the cycle shall consist of six seconds of idling in neutral with the clutch engaged and five seconds in first gear with the clutch disengaged.

5.4.1.4. For the idling periods during each cycle the corresponding times shall be sixteen seconds in neutral and five seconds in first gear with the clutch disengaged.

5.4.1.5. The last idling period in the cycle shall consist of seven seconds in neutral with the clutch engaged.

5.4.2. Semi-automatic gearboxes:

The manufacturer's instructions for driving in town, or in their absence instructions applicable to manual gearboxes, shall be followed.

5.4.3. Automatic gearboxes:

The selector must not be operated at any time during the test unless the manufacturer specifies otherwise. In the latter case the procedure for manual gearboxes shall be applied.

5.5. Accelerations

5.5.1. Accelerations shall be so performed that the rate of acceleration is as constant as possible throughout the operation.

5.5.2. If acceleration cannot be carried out in the prescribed time, the extra time required shall be deducted from the time allowed for changing the combination, if possible, and in any case from the next steady-speed period.

5.6. Decelerations

5.6.1. All decelerations shall be effected by removing the foot completely from the accelerator, the clutch remaining engaged. The clutch shall be disengaged, without touching the gear lever, at a speed of 10 km/h.

5.6.2. If the period of deceleration is longer than that prescribed for the corresponding phase, the vehicle's brakes shall be used to keep to the cycle.

5.6.3. If the period of deceleration is shorter than that prescribed for the corresponding phase, the timing of the theoretical cycle shall be restored by an idling period merging into the following idling operation.

5.6.4. At the end of the deceleration period (stopping vehicle on the rollers) the gear shall be put into neutral and the clutch engaged.

▼B**5.7. Steady speeds**

- 5.7.1. 'Pumping' or the closing of the throttle shall be avoided when passing from acceleration to the following steady speed.
- 5.7.2. Periods of constant speed shall be achieved by keeping the accelerator position fixed.

6. PROCEDURE FOR SAMPLING AND ANALYSIS**6.1. Sampling**

- 6.1.1. Sampling shall begin as soon as the valve has been opened as indicated in item 5.2.2.
- 6.1.2. If several bags are used the bag shall be changed at the beginning of the first idling period of a cycle.
- 6.1.3. The bag shall be hermetically closed as soon as it is full.
- 6.1.4. At the end of the last cycle the valve shall be operated to divert the gases produced by the engine into the atmosphere.

6.2. Analysis

- 6.2.1. The gases contained in each bag shall be analysed as soon as possible and in any event not later than twenty minutes after filling of the bag in question began. ►**M1** If the design of the bag inlet does not ensure complete mixing of the gases emitted during the test, these gases must be mixed before analysis e.g. via a recirculating pump. ◀
- 6.2.2. If the sampling probe is not left permanently in the bag, the entry of air into the latter during insertion of the probe and the escape of gases from the bag during extraction of the probe should be avoided.
- 6.2.3. The analyser shall be in a stabilised condition within one minute of its connection to the bag.
- 6.2.4. The figure adopted as the content of the gases in each of the effluents measured shall be that read off after stabilisation of the measuring instrument.

6.3. Measurement of volume

- 6.3.1. To avoid wide temperature variations, the volume of the bag or bags shall be measured as soon as the gases have reached room temperature.
- 6.3.2. The bags shall be emptied by passing the gases through the gas gauge.
- 6.3.3. The temperature (tm) used for the calculations shall be the arithmetic mean of the temperatures at the beginning and at the end of emptying, the maximum permissible difference between these two temperatures being less than 5 °C.
- 6.3.4. The pressure (Pm) used for the calculations shall be the arithmetic mean of the absolute pressures recorded beginning and at the end of emptying, the maximum permissible difference between these two pressures being less than ►**M3** 5.33 mbar ◀.
- 6.3.5. The volume of gas drawn off for analysis shall be added to the volume measured by the meter if the first volume is equivalent to more than 1 per cent of the measured volume. The result obtained shall be designated by the symbol Vm.

7. DETERMINATION OF THE QUANTITY OF GASEOUS POLLUTANTS EMITTED**7.1. Correction of the measured volumes of gas**

The volume of the gases contained in each bag shall be referred to normal temperature and pressure by means of the formula:

$$V = V_m \frac{273}{273 + t_m} \times \frac{P_m - P_H}{760},$$

Vm: is the volume, expressed in litres, recorded as indicated in item 6.3.5;

▼B

tm: is the arithmetic mean of the extreme temperatures recorded as indicated in item 6.3.3, expressed in degrees Celsius;

Pm: is the arithmetic mean of the extreme absolute pressures recorded as indicated in item 6.3.4, expressed in ►M3 millibars ◀; and

▼M1

PH: is the partial water-vapour pressure expressed in ►M3 millibars ◀.

▼M2

For the purpose of determining corrected volume V' in the case of nitrogen oxides, value PH shall be taken to be equal to 0.

7.2. Correction of 'nitrogen dioxide' content

7.2.1. The nitrogen dioxide content of the gases shall be corrected by means of following formula:

$$C_c = \frac{1}{1 - 0.0329 (H - 10.7)} C_M$$

C_M = the measured nitrogen dioxide content.

C_c = the corrected nitrogen dioxide content.

H = the absolute humidity expressed in grams of water per kilogram of dry air.

Absolute humidity H is given by the following formula:

$$H = \frac{6 \cdot 2111 \text{ Ra} \times P_d}{P_B - P_d \times \frac{\text{Ra}}{100}}$$

Ra = the relative humidity of the ambient air in %.

P_d = the saturated-water-vapour pressure at ambient temperature measured with a dry-bulb thermometer.

P_B = the barometric pressure.

Pressures P_d and P_B shall be expressed in the same units.

7.3. Mass of gaseous pollutants contained in each bag

The mass of the gaseous pollutants contained in each bag shall be determined by means of the product of $d \times C \times V$ where C is the content per unit volume, d the density of the gaseous pollutants under consideration and V the corrected volume. V shall be replaced by V' in the case of nitrogen oxides.

For carbon monoxide, d = 1.250.

For hydrocarbons, d = 3.844 (hexane).

For nitrogen oxides, d = 2.05 (NO₂).


▼B**►M2 7.4. ◀ Total mass of gaseous pollutants emitted**

The mass M of each gaseous pollutant emitted by the vehicle during the test shall be determined by adding the masses of the gaseous pollutants contained in each bag and calculated as indicated in item 7.2.

Note: Laboratories are recommended to check the analyses by also measuring the quantity of carbon dioxide produced.

▼B

APPENDIX 1

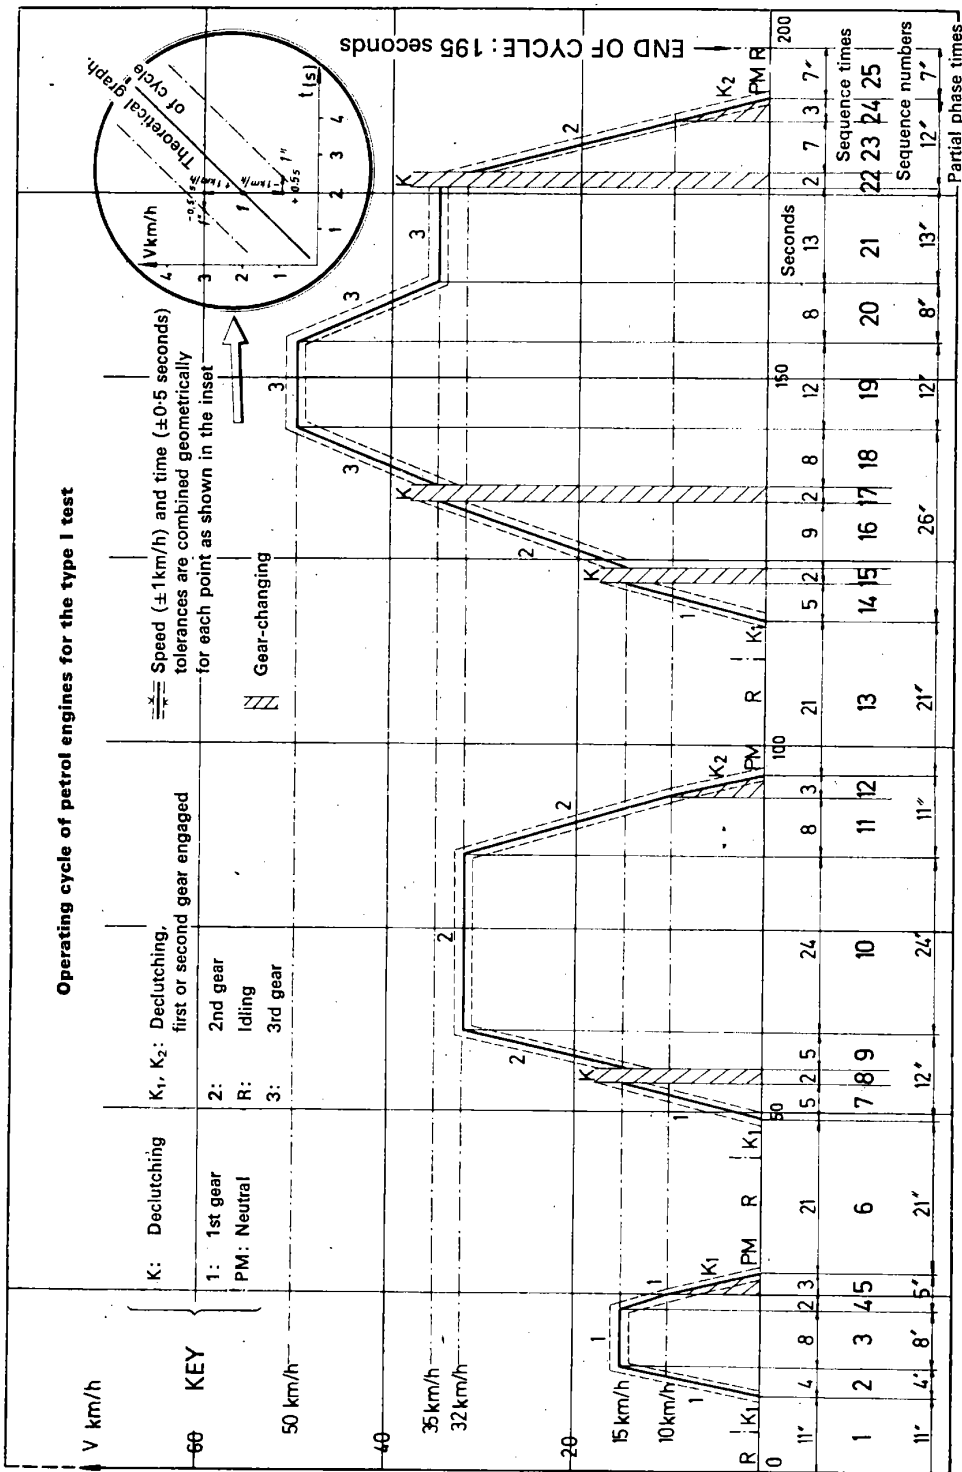

▼B

APPENDIX 2

Analysis of the operating cycle used for the type I test

	<i>Time</i>		<i>%</i>
1. Analysis by phases			
Idling	60 sec	30·8	} 35·4
Idling, vehicle moving, clutch engaged on one combination	9 sec	4·6	
Gear change	8 sec		4·1
Accelerations	36 sec		18·5
Steady speed	57 sec		29·2
Decelerations	25 sec		12·8
	<hr/> 195 sec		<hr/> 100
2. Analysis based on use of gearbox			
Idling	60 sec	30·8	} 34·5
Idling, vehicle moving, clutch engaged on one combination	9 sec	4·6	
Gear change	8 sec		4·1
— first gear	24 sec		12·3
— second gear	53 sec		27·2
— third gear	41 sec		21
	<hr/> 195 sec		<hr/> 100

Average speed during test: 19 km/h.

Effective running time: 195 sec.

Theoretical distance covered per cycle: 1·013 km.

Equivalent distance for the test (4 cycles): 4·052 km.

▼B*ANNEX IV***TYPE II TEST**

(Carbon-monoxide emission test at idling speed)

Procedure for the Type II test specified in item 3.2.12 of Annex I**1. CONDITIONS OF MEASUREMENT**

- 1.1. The fuel shall be the reference fuel whose specifications are given in Annex VI.

▼M1

- 1.2. The Type II test shall be carried out immediately after the fourth operating cycle of the Type I test, with the engine at idling speed and the choke not in use, starting from cold. Immediately before each subsequent measurement of the carbon monoxide content, an operating cycle of the Type I test shall be performed as described in item 1.1 of Annex III.

▼B

- 1.3. In the case of vehicles with manual or semi-automatic transmission gearboxes the test shall be carried out with the gear lever in the 'neutral' position and with the clutch engaged.
- 1.4. In the case of vehicles with automatic transmission gearboxes the test shall be carried out with the gear selector in the 'zero' or 'parking' position.

▼M1**1.5. Setting control for idling.****1.5.1. Definition**

For the purposes of this Directive, 'setting controls' means those parts which can be used to alter the idling speed of the engine and can be easily adjusted by an operator using only the tools described under item 1.5.1.1 below. In particular, devices for calibrating fuel and air flow rates shall not be regarded as 'setting controls' if their adjustment necessitates the removal of set-stops which normally prohibit their adjustment by anyone other than a qualified mechanic.

- 1.5.1.1. Tools which can be used to adjust the idle setting controls: screw-driver (ordinary or cross-headed), spanners (ring, open-ended or adjustable), pliers, Allen keys.

1.5.2. Determination of the measuring points.

- 1.5.2.1. The first measurement shall be taken at the vehicle settings used for the Type I test.

- 1.5.2.2. A sufficient number of characteristic positions shall be determined for each continuously variable setting control.

- 1.5.2.3. The measurement of the carbon monoxide content of the exhaust gases must be taken at all possible positions of the setting controls, but with the continuously variable controls only for the positions stated under item 1.5.2.2.

- 1.5.2.4. The Type II test shall be deemed satisfactory if either of the following conditions is fulfilled:

- 1.5.2.4.1. None of the values measured in accordance with the requirements of item 1.5.2.3 exceeds the limit value:

- 1.5.2.4.2. the maximum content obtained if one of the setting controls is continuously varied while the setting of the other controls remains constant does not exceed the limit value, this condition having to be fulfilled in respect of the various combinations of the setting control configurations apart from the continuously varied control.

- 1.5.2.5. The possible positions of the setting controls shall be limited,

- 1.5.2.5.1. by whichever of the following is greater: the lowest crankshaft speed which the engine can achieve at idling speed; the crankshaft idling speed recommended by the manufacturer, minus 100 rpm;

- 1.5.2.5.2. by whichever of the following is lowest: the highest crankshaft speed which the engine can be made to achieve via the idle setting controls;

▼ M1

the crankshaft idling speed recommended by the manufacturer plus 250 rpm; the crankshaft speed at which the automatic clutch engages.

- 1.5.2.6. In addition, setting positions which are incompatible with the proper functioning of the engine must not be taken as measuring points, in particular when an engine is fitted with several carburettors, all of the carburettors must be adjusted to the same setting.

▼ B**2. SAMPLING OF GASES**

- 2.1. The sampling probe shall be placed in the pipe connecting the vehicle exhaust with the sampling bag and as close as possible to the exhaust.
- 2.2. In order to take account of possible dilution of the exhaust gases with air, the content by volume of carbon monoxide (T_1) and of carbon dioxide (T_2) shall be measured, and the content by volume (T) to be compared with the prescribed limit shall be calculated by the formula

$$T = T_1 \times \frac{0 \cdot 15}{(T_1 + T_2)}$$

▼B

ANNEX V

TYPE III TEST

(Verifying emissions of crankcase gases)

Procedure for the Type III test specified in item 3.2.1.3 of Annex I

1. GENERAL PROVISIONS
 - 1.1. The Type III test shall be carried out on the vehicle subjected to the Type I and the Type II tests.
 - 1.2. The engines tested shall include leak-proof engines other than those so designed that even a slight leakage may cause unacceptable operating faults (such as flat-twin engines).
2. TEST CONDITIONS
 - 2.1. Idling shall be regulated in conformity with the manufacturer's recommendations; in the absence of such recommendations it shall be so regulated as to achieve a maximum vacuum in the intake manifold.
 - 2.2. The measurements shall be performed in the following three sets of conditions of engine operation:

▼M3

Condition No	Vehicle speed (km/h)	Weighting factor	Power absorbed by brake
1	Idling	0.25	Nil
2	50 ± 2	0.25	That corresponding to the setting for type-I test
3	50 ± 2	0.50	That for condition No 2, multiplied by the factor 1.7

▼B

- M3 2.3. ◀ The engine speed for measurements as referred to under 2 and 3 in item 2.2 shall be selected as the lowest engine speed at which, gear ratios being taken into account, the vehicle can travel at a speed of 50 km/h in normal operating conditions.

3. TEST METHOD
 - 3.1. In each of the sets of conditions 1, 2 and 3 specified in item 2.2 above, the following shall be measured:
 - 3.1.1. The volume Q_n not recycled by the device in the unit time;
 - 3.1.2. The consumption by weight C_n of fuel in the same unit time.
 - 3.2. The volumes Q_n , measured as specified in item 4.6 in each of the sets of conditions, shall be referred to the standard conditions (►M3 1013.25 mbar ◀; 0 °C) by the formula

$$Q'_n = Q_n \frac{H}{\text{►M3 1013} \cdot 25 \text{ ◀}} \times \frac{273}{T}$$

- 3.3. The content by volume of hydrocarbons, t , shall be measured as specified in item 4.4. If the manufacturer so requests, the crankcase gases shall not be analysed but shall be assumed to contain 15 000 ppm of hydrocarbons.
- 3.4. The volume mass (weight per unit volume) of hydrocarbons shall be assumed to be 3.84 g/litre; for each of the aforementioned sets of conditions the weight of hydrocarbons discharged to the atmosphere shall be determined by the formula:

$$P_n = Q'_n \times t \times 3.84,$$

▼B

Q'_n being the corrected volumes.

- 3.5. The mean weight of hydrocarbons \bar{P} and the consumption \bar{C} of fuel shall be calculated from the values obtained for each of the aforementioned sets of conditions by applying the weighting factors specified in item 2.2. They shall be expressed in the same units.

- 3.6. Interpretation of results

The vehicle shall be deemed satisfactory if

$$\bar{P} \leq \frac{0.15}{100} \times \bar{C}.$$

4. METHOD OF MEASUREMENT OF THE VOLUME Q_n NOT RECYCLED BY THE DEVICE

- 4.1. **Steps to be taken before the test**

Before the test, all apertures other than that required for the recovery of the gases shall be stopped up.

- 4.2. **Principle of the method**

- 4.2.1. A suitable take-off not introducing any additional loss of pressure shall be installed on the recycling circuit of the device directly at the engine-connection aperture.

- 4.2.2. A flexible bag made of a material not absorbing hydrocarbons shall be so connected to the outlet from the take-off so as to collect the gases which are not recycled by the engine (see Appendix). The bag shall be emptied at each measurement.

- 4.3. **Method of measurement**

The bag shall be stopped up before each measurement. It shall be brought into communication with the take-off for a known period of time and then emptied through a suitable volumetric meter.

During emptying as aforesaid the pressure H , expressed in ►M3 mbar ◀, and the temperature N , expressed in degrees Celsius, shall be measured for the purpose of volume correction as referred to in item 3.2.

- 4.4. **Measurement of hydrocarbon content**

- 4.4.1. During emptying as aforesaid the hydrocarbon content shall, if appropriate, be measured by means of a non-dispersive n-hexane-sensitised infra-red analyser. The reading shall be multiplied by the coefficient 1.24 to allow for the absolute hydrocarbons concentration in the crank-case gases.

- 4.4.2. The analysers and the reference gases shall meet the conditions laid down in Annex III, items 3.5.7 and 3.5.8.

- 4.5. **Measurement of fuel consumption**

The weight of fuel consumed in each of the conditions of operation defined in item 2.2 shall be determined. This weight shall be referred to the unit time.

- 4.6. **Expression of results of measurements**

The values Q'_n , in which n relates to each of the conditions referred to in item 2.2, and the consumptions C_n shall be referred to the same unit time for the purpose of applying the weighting coefficients and the calculations for determining the weighted weight of hydrocarbons and the weighted consumption of fuel.

- 4.7. **Accuracy of measurements**

- 4.7.1. The pressure in the bag during measurement of the volumes shall be measured to within \pm ►M3 1.33 mbar ◀.

- 4.7.2. The vacuum at intake shall be measured to within \pm ►M3 10.67 mbar ◀.

▼B

- 4.7.3. The vehicle speed shall be taken at the rollers and measured to within ± 2 km/h.
- 4.7.4. The quantity of gas discharged shall be measured to within $\pm 5\%$.
- 4.7.5. The temperature of the gases during measurement of the volume shall be measured to within ± 2 °C.
- 4.7.6. The hydrocarbon content shall be measured, if appropriate, to within $\pm 5\%$, irrespective of the degree of accuracy of the reference gases.
- 4.7.7. The fuel consumption shall be measured to within $\pm 4\%$.

▼M1


5. ALTERNATIVE TEST METHODS

- 5.1. The vehicle shall be considered satisfactory if, under each of the measuring conditions specified in item 2.2, it is shown that the recirculating or venting system is able to recycle all of the crankcase gases which could be emitted to the atmosphere.
- 5.2. The requirements of items 2 and 4.7 shall apply to this method
- 5.3. **Test methods**
 - 5.3.1. *General method*
 - 5.3.1.1. The apertures of the engine shall be left in the original condition on the engine.
 - 5.3.1.2. The measurement of the pressure inside the crankcase shall be made at the dip stick aperture. The pressure shall be measured with an inclined manometer.
 - 5.3.1.3. The vehicle shall be considered satisfactory, if for each of the measuring conditions specified in item 2.2, the pressure measured in the crankcase does not exceed the atmospheric pressure at the time of measuring.
 - 5.3.1.4. If, for any of the measuring conditions specified in item 2.2, the pressure measured in the crankcase exceeds the atmospheric pressure, the additional test specified in item 5.3.2 shall be carried out when requested by the manufacturer.
 - 5.3.1.5. For tests in accordance with the method described, the crankcase pressure shall be measured to within \pm ►**M3** 0.1 mbar ◀.
 - 5.3.2. *Additional test method*
 - 5.3.2.1. The apertures of the engine shall be left in the original condition on the engine.
 - 5.3.2.2. A flexible bag impervious to crankcase gases and with a capacity of about 5 litres shall be connected to the dip stick aperture. This bag shall be empty before each measurement.
 - 5.3.2.3. The bag shall be stopped up before each measurement. It shall be opened to the crankcase for five minutes for each measurement condition specified in item 2.2.
 - 5.3.2.4. The vehicle shall be considered satisfactory if no visible inflation of the bag occurs under any of the conditions specified in item 2.2.
 - 5.3.3. *Note*
 - 5.3.3.1. If the design of the engine is such that the test cannot be performed according to the methods specified in items 5.3.1 and 5.3.2, the measurements shall be carried out according to the method specified in item 5.3.2 with the following modifications:
 - 5.3.3.2. before the test, all apertures other than that required for the collection of the gases shall be stopped up.
 - 5.3.3.3. The bag shall be connected to a suitable take-off which does not introduce any additional loss of pressure and which is located on the recycling circuit of the device directly at the engine-connection aperture.

▼B

APPENDIX

Type III Test

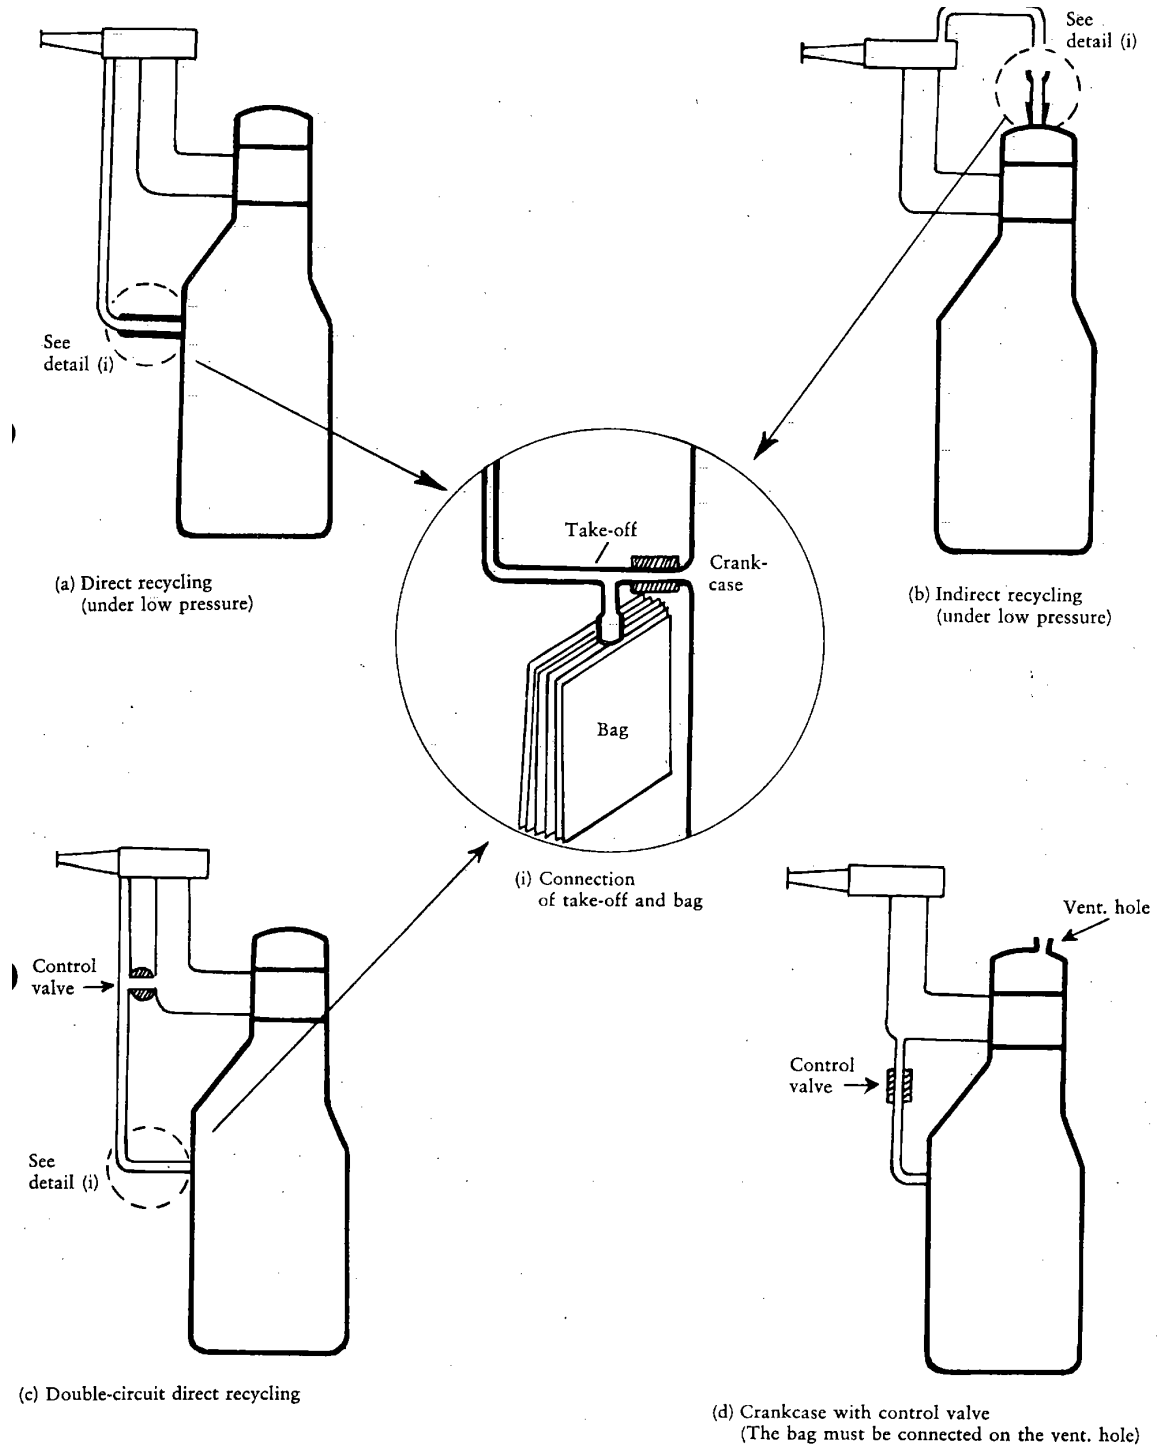

▼B

ANNEX VI

Characteristics of reference fuel ⁽¹⁾ and methods used to determine them

	<i>Limits and units</i>	<i>Method</i>
Research octane number	99 ± 1	ASTM ⁽²⁾ D 908-67
specific gravity 15/4 °C	0.742 ± 0.007	ASTM D 1298-67
Reid vapour pressure	{ 0.6 ± 0.04 bars 8.82 ± 0.59 psi	ASTM D 323-58
Distillation		
Initial boiling point		
— 10% vol	50 ± 5 °C	ASTM D 86-67
— 50% vol	100 ± 10 °C	
— 90% vol	160 ± 10 °C	
Final boiling point	195 ± 10 °C	
— residue	max. 2% vol	
— loss	max. 1% vol	
Hydrocarbon analysis		
— olefins	18 ± 4% vol	
— aromatics	35 ± 5% vol	
— saturates	balance	ASTM D 1319-66 T
Oxidation stability	min. 480 minutes	ASTM D 525-55
(residual)	max. 4 mg/100 ml	ASTM D 381-64
Antioxidant	min. 50 ppm	
Sulphur content	0.03 ± 0.015% by weight	ASTM D 1266-64
Lead content	{ 0.57 ± 0.03 g/l 2.587 ± 0.136 g/IG	
— nature of scavenger	motor mix	
— organic lead compound	not specified	ASTM D 526-66
Other additives	nil	

⁽¹⁾ In blending the reference fuel, only conventional European base materials should be used, unconventional components such as pyrolysis gasoline, thermally cracked material and motor benzole being excluded.

⁽²⁾ Initials of the American Society for Testing and Materials, 1916 Race St Philadelphia, Pennsylvania 19103, U.S.A. The figures after the dash denote the year in which a standard was adopted or revised.

Should any ASTM standards be amended, the standards adopted in the years quoted above will remain applicable unless it is agreed to replace them by later standards.

▼ **M3***ANNEX VII***METHOD OF CALIBRATING THE DYNAMOMETER**

1. This Annex describes the method to be used to determine the relationship between the indicated power of the dynamometer and the actual power absorbed by the dynamometer.

The actual power absorbed by the dynamometer (P_a) is the power absorbed by the brake, plus the power absorbed due to friction within the dynamometer, but not the power loss due to the friction between the tyre and roller.

2. This method disregards the variations in the internal friction of the roller(s), which are due to the load applied by the vehicle.
3. According to this method the power absorbed is determined on the basis of the deceleration times of the roller(s). The difference between the deceleration time of the driven roller and that of the free roller can be disregarded in the case of two-roller dynamometers, i.e. the time to be taken into consideration is that of the driven roller.
4. The following procedure will be used:
 - 4.1. Use a flywheel or any other means of simulating the inertia of the mass of the vehicle. Select for this purpose the inertial mass with which the dynamometer is most commonly used.
 - 4.2. Bring the dynamometer up to speed by placing the vehicle on the rollers, or by any other method.
 - 4.3. A fifth wheel, revolution counter or any other suitable device may be used to measure the speed(s) of the roller(s).
 - 4.4. Bring the roller(s) to a speed of 50 km/h and apply a suitable power to the dynamometer in accordance with the table in point 4.2 of Annex III.
 - 4.5. Note the power indicated (P_i).
 - 4.6. Bring the roller(s) to a speed of at least 60 km/h.
 - 4.7. Disengage the device used to bring the dynamometer up to speed (there must be no vehicle on the roller(s)).
 - 4.8. Note the times taken for the speed of the roller(s) to decrease from 55 to 45 km/h.
 - 4.9. The power P_a is to be calculated using the formula:

$$P_a = \frac{M_1 \cdot (V_1^2 - V_2^2)}{2\,000 \cdot t} = \frac{0 \cdot 03857 \cdot M_1}{t}$$

where:

P_a = power absorbed by the dynamometer in kW,


M_1 = equivalent inertia of the driven roller in kg,

V_1 = initial speed in m/s (55 km/h = 15.28 m/s),

V_2 = final speed in m/s (45 km/h = 12.50 m/s),

t = time needed by the roller(s) to slow down from 55 to 45 km/h.

- 4.10. Repeat operations 4.4 to 4.9 a sufficient number of times to cover the range of powers set out in Annexes III and V.
- 4.11. Diagram showing the indicated power as a function of the power absorbed at 50 km/h.

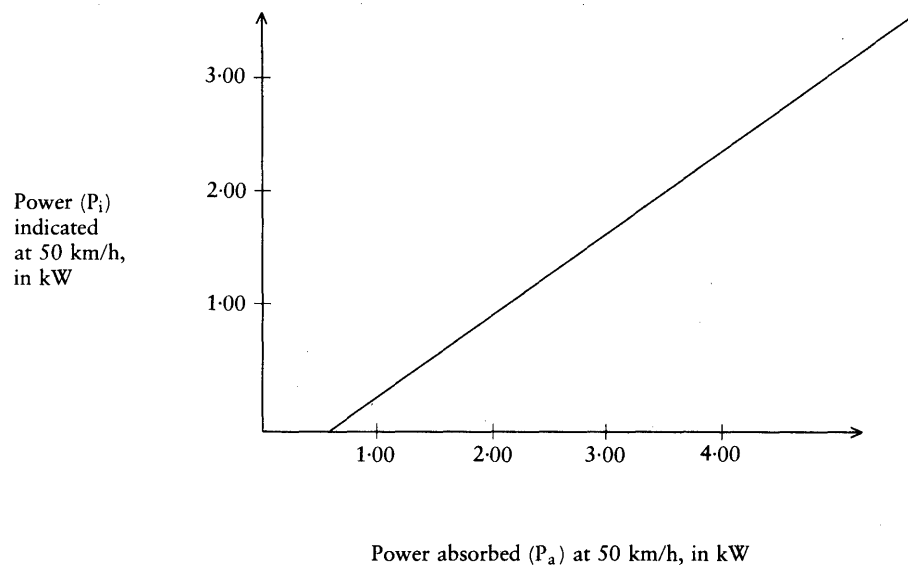▼ M3

▼ **B**ANNEX ► **M3** VIII ◀Name of
administration►⁽¹⁾ MODEL

Annex to the EEC vehicle type-approval certificate concerning pollution of the air by gases from positive-ignition engines

Articles 4 (2) and 10 of Council Directive 70/156/EEC of 6 February 1970 on the approximation of the laws of the Member States relating to the type-approval of motor vehicles and their trailers)

Having regard to the modifications in accordance with Directive 78/665/EEC ◀

- Registration No
1. Make (name of undertaking)
 2. Type and trade description
 3. Manufacturer's name and address
 4. If applicable, name and address of manufacturer's authorised representative
 - ⁽²⁾5. Reference mass of vehicle◀
 6. Technically permissible ►⁽³⁾ maximum mass ◀ of vehicle
 7. Gearbox
 - 7.1. Manual or automatic¹
 - 7.2. Number of gear ratios
 - ⁽⁴⁾7.3. Transmission ratio:
 - first gear
 - second gear
 - third gear
 - Final drive ratio
 - Tyres:
 - dimensions
 - dynamic rolling circumference◀
 - 7.4. Check of performances referred to in Annex III, item 2.1.6
 8. Vehicle submitted for checks on
 9. Technical service conducting tests
 10. Date of report issued by that service
 11. Number of report issued by that service
 12. The vehicle satisfies/does not satisfy¹ the requirements
 - mentioned in the first indent of Article 2 of this Directive
 - mentioned in the second indent of Article 2 of this Directive.
 13. The following documents, bearing the registration number shown above, are annexed to this communication:
 - one copy of Annex II, duly completed and with the drawings and diagrams referred to attached
 - one photograph of the engine and its compartment
 - one copy of the test report.
 14. Place
 15. Date
 16. Signature

¹ Delete as appropriate.