

Commission Regulation (EC) No 517/2008 of 10 June 2008 laying down detailed rules for the implementation of Council Regulation (EC) No 850/98 as regards the determination of the mesh size and assessing the thickness of twine of fishing nets

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EC) No 517/2008, ANNEX V. (See end of Document for details)

---

## ANNEX V

### Calibration and testing of the mesh gauge

#### A. Verification of length measurement

The verification of length measurement shall be performed by inserting the jaws of the gauge to be used during the inspection, into slots of different lengths in the calibrated rigid test plate. This can be done at any time.

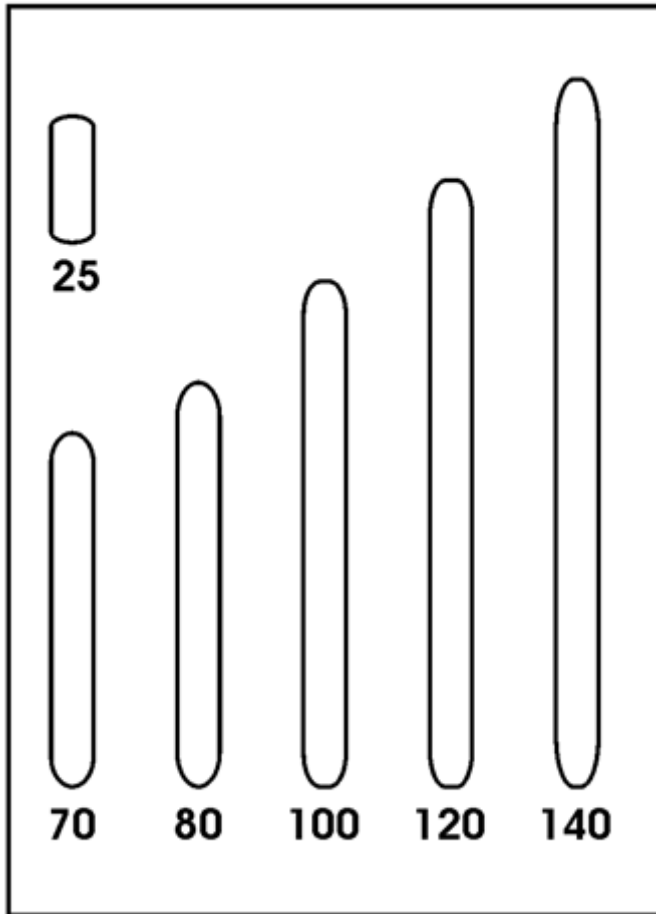


Figure 1

#### B. Verification of force measurement

The verification of force measurement shall be performed by hanging calibrated weights on the fixed jaw containing the load cell, with the gauge held vertical and secure. The weights shall have the following values: 10, 20, 50 and 125 N. The weights can only be used under stable conditions.


Figure 2

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EC) No 517/2008, ANNEX V. (See end of Document for details)

---

(This drawing is for illustrative purposes only)

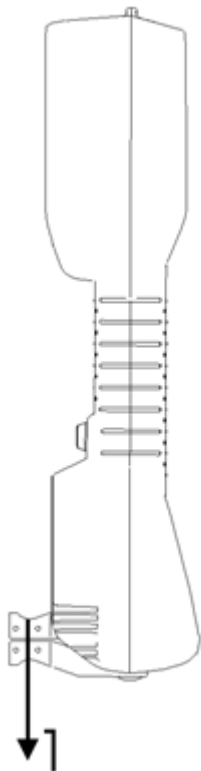

**Changes to legislation:**

There are currently no known outstanding effects for the Commission Regulation (EC) No 517/2008, ANNEX V.