

Commission Regulation (EC) No 517/2008 of 10 June 2008 laying down detailed rules for the implementation of Council Regulation (EC) No 850/98 as regards the determination of the mesh size and assessing the thickness of twine of fishing nets


Changes to legislation: There are currently no known outstanding effects for the
Commission Regulation (EC) No 517/2008, ANNEX VII. (See end of Document for details)

ANNEX VII

Operation of the mesh gauge for inspection

When measuring the meshes the inspector shall:

- (a) insert the jaws into the mesh opening with the fixed jaw of the gauge against the knot, as shown in the figure below;
- (b) activate the gauge allowing the jaws to open until the movable jaw reaches the opposite knot and stops when the set force is reached:

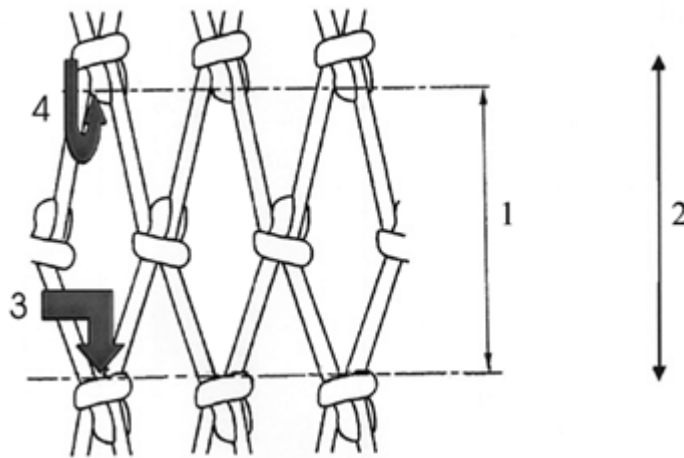

Changes to legislation:

There are currently no known outstanding effects for the Commission Regulation (EC) No 517/2008, ANNEX VII.