

Commission Regulation (EU) 2016/1718 of 20 September 2016 amending Regulation (EU) No 582/2011 with respect to emissions from heavy-duty vehicles as regards the provisions on testing by means of portable emission measurement systems (PEMS) and the procedure for the testing of the durability of replacement pollution control devices (Text with EEA relevance)

COMMISSION REGULATION (EU) 2016/1718

of 20 September 2016

amending Regulation (EU) No 582/2011 with respect to emissions from heavy-duty vehicles as regards the provisions on testing by means of portable emission measurement systems (PEMS) and the procedure for the testing of the durability of replacement pollution control devices

(Text with EEA relevance)

THE EUROPEAN COMMISSION,

Having regard to the Treaty on the Functioning of the European Union,

Having regard to Regulation (EC) No 595/2009 of the European Parliament and of the Council of 18 June 2009 on type-approval of motor vehicles and engines with respect to emissions from heavy-duty vehicles (Euro VI) and on access to vehicle repair and maintenance information and amending Regulation (EC) No 715/2007 and Directive 2007/46/EC and repealing Directives 80/1269/EEC, 2005/55/EC and 2005/78/EC<sup>(1)</sup>, and in particular Article 4(3), Article 5(4) and Article 12 thereof,

Whereas:

- (1) In-service conformity testing represents one of the building blocks of the type-approval procedure and allows for the verification of the performance of emission control systems during the useful lifetime of vehicles. In accordance with Commission Regulation (EU) No 582/2011<sup>(2)</sup>, the tests are performed by means of portable emission measurement systems (PEMS) which assess the emissions in the normal operations of use. The PEMS approach is equally applied to verify off-cycle emissions during the type-approval certification.
- (2) Regulation (EU) No 582/2011 states that any additional requirements with respect to the off-cycle in-use emissions testing procedure should be introduced after the assessment of the test procedure specified in that Regulation.
- (3) The Commission has therefore performed an in-depth analysis of the testing procedure. That analysis has identified a number of shortfalls which undermine the efficiency of the European type-approval legislation and need to be remedied in order to ensure the appropriate level of environmental protection.
- (4) Emission performance of vehicles in a warm-up period is currently not assessed under the type-approval demonstration test or under the in-service conformity test. In order to address the existing knowledge gap and to prepare a new testing procedure for cold start

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

operations, a monitoring phase during which data from type-approval and in-service conformity tests will be collected should be launched.

- (5) In accordance with Regulation (EU) No 582/2011, replacement pollution control devices are to be type-approved in accordance with Euro VI emission requirements once the specific durability testing requirements are introduced in that Regulation.
- (6) It is therefore necessary to lay down a procedure which will properly assess the durability of those replacement parts entering the Union market and to ensure that they meet environmental requirements compatible with those set for similar systems produced as original vehicles' parts.
- (7) A test procedure based on the accelerated ageing of replacement pollution control devices due to thermal and lubricant consumption effects meets the objective of addressing durability of replacement pollution control devices in an accurate and objective manner and is not excessively burdensome for the industry.
- (8) Regulation (EU) No 582/2011 sets out requirements related to the measures that need to be introduced by vehicle manufacturers in order to prevent tampering with emission control systems. Those requirements should effectively address the most common means of tampering without imposing an excessive burden on the industry.
- (9) References to international standards in Regulation (EU) No 582/2011 should be updated.
- (10) In order to ensure a sufficient lead time for the vehicle manufacturers to modify their products in accordance with the new requirement on the power threshold, that requirement should take effect on 1 September 2018 for new types and on 1 September 2019 for all new vehicles.
- (11) It is appropriate that the new requirements for the in-service testing do not apply retroactively to engines and vehicles which have not been approved in accordance with those requirements. Therefore, the new provisions set out in Annex II shall only apply to the in-service conformity testing of new types of engines and vehicles which have been approved in accordance with the amended version of the Regulation (EU) No 582/2011.
- (12) Regulation (EU) No 582/2011 should therefore be amended accordingly.
- (13) The measures provided for in this Regulation are in accordance with the opinion of the Technical Committee — Motor vehicles,

HAS ADOPTED THIS REGULATION:

*Article 1*

Regulation (EU) No 582/2011 is amended as follows:

- (1) in Article 14, paragraph 3 is deleted;
- (2) in Article 15, paragraph 5 is deleted;
- (3) the following Article 17a is inserted:

### *Article 17a*

#### **Transitional provisions for certain type-approvals and certificates of conformity**

1 With effect from 1 September 2018, national authorities shall refuse, on grounds relating to emissions, to grant EC type-approval or national type-approval in respect of new types of vehicles or engines tested using procedures which do not comply with points 4.2.2.2 and 4.2.2.2.1 and 4.2.2.2.2 and 4.3.1.2 and 4.3.1.2.1 and 4.3.1.2.2 of Appendix 1 to Annex II.

2 With effect from 1 September 2019, national authorities shall, in the case of new vehicles which do not comply with points 4.2.2.2 and 4.2.2.2.1 and 4.2.2.2.2 and 4.3.1.2 and 4.3.1.2.1 and 4.3.1.2.2 of Appendix 1 to Annex II, consider certificates of conformity issued in respect of those vehicles to be no longer valid for the purposes of Article 26 of Directive 2007/46/EC and shall, on grounds relating to emissions, prohibit the registration, sale and entry into service of such vehicles.

With effect from 1 September 2019 and except in the case of replacement engines for in-service vehicles, national authorities shall prohibit the sale or use of new engines which do not comply with points 4.2.2.2 and 4.2.2.2.1 and 4.3.1.2 and 4.3.1.2.1 of Appendix 1 to Annex II.;

- (4) Annex I is amended in accordance with Annex I to this Regulation;
- (5) Annex II is amended in accordance with Annex II to this Regulation;
- (6) Annex VI is amended in accordance with Annex III to this Regulation;
- (7) Annex XI is amended in accordance with Annex IV to this Regulation;
- (8) Annex XIII is amended in accordance with Annex V to this Regulation;
- (9) Annex XIV is amended in accordance with Annex VI to this Regulation.

### *Article 2*

This Regulation shall enter into force on the twentieth day following that of its publication in the *Official Journal of the European Union*.

With the exception of point 8(c), which shall apply to all vehicles as from the entry into force of this Regulation, Annex II shall apply from 1 January 2017 to new vehicle types.

This Regulation shall be binding in its entirety and directly applicable in the Member States in accordance with the Treaties.

Done at Brussels, 20 September 2016.

*For the Commission*

*The President*

Jean-Claude JUNCKER

---

**Changes to legislation:** There are currently no known outstanding effects for  
the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

## ANNEX I

Annex I to Regulation (EU) No 582/2011 is amended as follows:

- (1) point 1.1.2 is replaced by the following:
- 1.1.2. If the manufacturer permits the engine family to run on market fuels that do not comply neither with Directive 98/70/EC of the European Parliament and of the Council<sup>(3)</sup> nor with CEN standard EN 228:2012 (in the case of unleaded petrol) or CEN standard EN 590:2013 (in the case of diesel), such as running on B100 (EN 14214), the manufacturer shall, in addition to the requirements in point 1.1.1, comply with the following requirements:
- (a) declare the fuels the engine family is capable of running on in point 3.2.2.2.1 of the Information Document as set out in Part 1 of Appendix 4., either by reference to an official standard or to a production specification of a brand specific market fuel not meeting any official standard such as those mentioned in point 1.1.2. The manufacturer shall also declare that the functionality of the OBD system is not affected by the use of the declared fuel;
- (b) demonstrate that the parent engine meets the requirements specified in Annex III and in Appendix 1 of Annex VI to this Regulation on the fuels declared; the approval authority may request that the demonstration requirements be further extended to those laid down in Annex VII and Annex X;
- (c) be liable to meet the requirements of in-service conformity specified in Annex II on the fuels declared including any blend between the declared fuels and the market fuels included in Directive 98/70/EC and the relevant CEN standards.

At the request of the manufacturer, the requirements set out in this point shall be applied to fuels used for military purposes.

For the purposes of point (a) of the first subparagraph where the emission tests are performed for demonstrating compliance with the requirements of this Regulation, a fuel analysis report of the test fuel shall be attached to the test report and shall comprise at least the parameters specified in the official specification of the fuel manufacturer.;

- (2) point 1.1.5 is replaced by the following:
- 1.1.5. In the case of natural gas/biomethane engines, the ratio of the emission results “r” shall be determined for each pollutant as follows:

$$r = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 1}}$$

or

$$r_a = \frac{\text{emission result on reference fuel 2}}{\text{emission result on reference fuel 3}}$$

and

$$r_b = \frac{\text{emission result on reference fuel 1}}{\text{emission result on reference fuel 3}}$$

.”

- (3) point 3.1 is replaced by the following:

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

- 3.1. In the case of an engine type-approved as a separate technical unit or a vehicle type-approved with regard to emissions and access to vehicle repair and maintenance information, the engine shall bear:
- (a) the trademark or trade name of the manufacturer of the engine;
  - (b) the manufacturer's commercial description of the engine.;
- (4) the following points 3.2.1.1 to 3.2.1.6 are inserted:
- 3.2.1.1. In case of a natural gas/biomethane engine one of the following markings to be placed after the EC type-approval mark:
- (a) H in case of the engine being approved and calibrated for the H-range of gases;
  - (b) L in case of the engine being approved and calibrated for the L-range of gases;
  - (c) HL in case of the engine being approved and calibrated for both the H-range and L-range of gases;
  - (d) H<sub>t</sub> in case of the engine being approved and calibrated for a specific gas composition in the H-range of gases and transformable to another specific gas in the H-range of gases by fine tuning of the engine fuelling;
  - (e) L<sub>t</sub> in case of the engine being approved and calibrated for a specific gas composition in the L-range of gases and transformable to another specific gas in the L-range of gases after fine tuning of the engine fuelling;
  - (f) HL<sub>t</sub> in the case of the engine being approved and calibrated for a specific gas composition in either the H-range or the L- range of gases and transformable to another specific gas in either the H-range or the L-range of gases by fine tuning of the engine fuelling;
  - (g) CNG<sub>fr</sub> in all other cases where the engine is fuelled with CNG/biomethane and designed for operation on one restricted gas fuel range composition;
  - (h) LNG<sub>fr</sub> in the cases where the engine is fuelled with LNG and designed for operation on one restricted gas fuel range composition;
  - (i) LPG<sub>fr</sub> in the cases where the engine is fuelled with LPG and designed for operation on one restricted gas fuel range composition;
  - (j) LNG<sub>20</sub> in case of the engine being approved and calibrated for a specific LNG composition resulting in a  $\lambda$ -shift factor not differing by more than 3 per cent the  $\lambda$ -shift factor of the G<sub>20</sub> gas specified in Annex IX, and the ethane content of which does not exceed 1,5 per cent;
  - (k) LNG in case of the engine being approved and calibrated for any other LNG composition;
- 3.2.1.2. For dual-fuel engines, the approval mark shall contain a series of digits after the national symbol, the purpose of which is to distinguish for which dual-fuel engine type and with which range of gases the approval has been granted. The series of digits will be constituted of two digits identifying the dual-fuel engine type as defined in Article 2, followed by the letter or

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

letters specified in point 3.2.1.1 corresponding to the natural gas/biomethane composition used by the engine. The two digits identifying the dual-fuel engine types as defined in Article 2 are the following:

- (a) 1A for dual-fuel engines of Type 1A;
  - (b) 1B for dual-fuel engines of Type 1B;
  - (c) 2A for dual-fuel engines of Type 2A;
  - (d) 2B for dual-fuel engines of Type 2B;
  - (e) 3B for dual-fuel engines of Type 3B;
- 3.2.1.3. For diesel-fuelled CI engines, the approval mark shall contain the letter ‘D’ after the national symbol;
- 3.2.1.4. For ethanol (ED95)-fuelled CI engines the approval mark shall contain the letters ‘ED’ after the national symbol;
- 3.2.1.5. For ethanol (E85)-fuelled PI engines the approval mark shall contain ‘E85’ after the national symbol;
- 3.2.1.6. for petrol-fuelled PI engines the approval mark shall contain the letter ‘P’ after the national symbol.;
- (5) in point 4.2, point (b) is replaced by the following:
- (b) as regards the compliance of the system ensuring the correct operation of NO<sub>x</sub> control measures, the installation shall, according to Appendix 4 of Annex 11 to UN/ECE Regulation No 49, meet the manufacturer's installation requirements as specified in Part 1 of Annex 1 to that Regulation.;
- (6) in Appendix 4, the ninth, tenth and eleventh paragraphs are replaced by the following:
- In the case of application for EC type-approval of an engine or engine family as a separate technical unit the general part and Parts 1 and 3 shall be filled in.
- In the case of application for EC type-approval of vehicle with an approved engine with regard to emissions and access to vehicle repair and maintenance information the general part and Part 2 shall be filled in.
- In the case of application for EC type-approval of a vehicle with regard to emissions and access to vehicle repair and maintenance information the general part and Parts 1, 2 and 3 shall be filled in.;
- (7) Appendix 9 is replaced by the following:

‘Appendix 9

### **EC Type-Approval Certification Numbering System**

Section 3 of the EC type-approval number issued according to Articles 6(1), 8(1) and 10(1) shall be composed by the number of the implementing regulatory act or the latest amending regulatory act applicable to the EC type-approval. The number shall be followed by an alphabetical character reflecting the requirements of OBD and SCR systems in accordance with Table 1.

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

TABLE I

Character	NO <sub>x</sub> OTL <sup>a</sup>	PM OTL <sup>b</sup>	CO OTL <sup>f</sup>	IUPR <sup>m</sup>	Reagent quality	Additional OBD monitors	Power threshold requirements	Implementation dates: all types	Implementation dates: all vehicles	Implementation date of registration
A <sup>j</sup> B <sup>j</sup>	Row “phase-in period” of Tables 1 or Table 2	Performance Monitoring <sup>c</sup>	N/A	Phase-in <sup>g</sup>	Phase-in <sup>d</sup>	N/A	20 %	31.12.2015	31.12.2015	31.12.2015 <sup>i</sup> 30.12.2016 <sup>j</sup>
B <sup>k</sup>	Row “phase-in period” of Tables 1 and 2	N/A	Row “phase-in period” of Table 2	N/A	Phase-in <sup>d</sup>	N/A	20 %	1.9.2014	4.9.2015	30.12.2016
C	Row “general requirements” of Tables 1 or Table 2	Row “general requirements” of Table 1	Row “general requirements” of Table 2	General <sup>h</sup>	General <sup>h</sup>	Yes	20 %	31.12.2015	31.12.2015	31.12.2018
D	Row “general requirements” of Tables 1 or Table 2	Row “general requirements” of Table 1	Row “general requirements” of Table 2	General <sup>h</sup>	General <sup>h</sup>	Yes	10 %	1.9.2018	8.9.2019	

Key:

- a** “NO<sub>x</sub> OTL” monitoring requirements as set out in Table 1 of Annex X for compression ignition and dual-fuel engines and vehicles and Table 2 of Annex X for positive ignition engines and vehicles.
- b** “PM OTL” monitoring requirements as set out in Table 1 of Annex X for compression ignition and dual-fuel engines and vehicles.
- c** “Performance monitoring” requirements as set out in point 2.1.1 of Annex X.
- d** Reagent quality “phase-in” requirements as set out in point 7.1 of Annex XIII.
- e** Reagent quality “general” requirements as set out in point 7.1.1 of Annex XIII.



---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

<b>f</b>	“CO OTL” monitoring requirements as set out in Table 2 of Annex X for positive ignition engines and vehicles.
<b>g</b>	IUPR “Phase-in” requirements as set out in Section 6 of Annex X.
<b>h</b>	IUPR “General” requirements as set out in Section 6 of Annex X.
<b>i</b>	For positive-ignition engines and vehicles equipped with such engines.
<b>j</b>	For compression-ignition and dual-fuel engines and vehicles equipped with such engines.
<b>k</b>	Only applicable to positive-ignition engines and vehicles equipped with such engines.
<b>l</b>	Additional provisions concerning monitoring requirements as set out in paragraph 2.3.1.2 of Annex 9A to UNECE Regulation No 49.
<b>m</b>	IUPR specifications are set out in Annex X. Positive Ignition engines and vehicles equipped with such engines are not subjected to IUPR.
<b>n</b>	ISC requirement set out in Appendix 1 to Annex II.
	N/A Not applicable.’.

## ANNEX II

Annex II to Regulation (EU) No 582/2011 is amended as follows:

- (1) point 2.1 is replaced by the following:
  - 2.1. The conformity of in-service vehicles or engines of an engine family shall be demonstrated by testing vehicles on the road operated over their normal driving patterns, conditions and payloads. The in-service conformity test shall be representative for vehicles operated on their real driving routes, with their normal payload and with the usual professional driver of the vehicle. When the vehicle is operated by a driver other than the usual professional driver of the particular vehicle, the alternative driver shall be skilled and trained to operate vehicles of the category subject to be tested.;
- (2) point 2.3 is replaced by the following:
  - 2.3. The manufacturer shall demonstrate to the approval authority that the chosen vehicle, driving patterns and conditions are representative for the engine family. The requirements as specified in point 4.5 shall be used to determine whether the driving patterns are acceptable for in-service conformity testing.;
- (3) point 4.1 is replaced by the following:
  - 4.1. **Vehicle payload**  
 Normal payload is a payload between 10 and 100 % of the maximum payload.  
  
 The maximum payload is the difference between technically permissible maximum laden mass of the vehicle and the mass of the vehicle in running order as specified in accordance to Annex I to Directive 2007/46/EC.  
  
 For the purpose of in-service conformity testing, the payload may be reproduced and an artificial load may be used.  
  
 Approval authorities may request to test the vehicle with any payload between 10 and 100 % of the maximum vehicle payload. In case the mass of the PEMS equipment

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

needed for operation exceeds 10 % of the maximum vehicle payload this mass may be considered as minimum payload.

Vehicles of category N<sub>3</sub> shall be tested, when applicable, with a semi-trailer.;

(4) points 4.4.1 to 4.5.5 are replaced by the following:

4.4.1. The test lubricating oil shall be market oil and must comply with the specifications of the engine manufacturer.

Oil samples shall be taken.

4.4.2. *Fuel*

The test fuel shall be market fuel covered by Directive 98/70/EC and relevant CEN standards or reference fuel as specified in Annex IX to this Regulation. Fuel samples shall be taken.

A manufacturer may request not to sample the fuel from a gas engine.

4.4.2.1. If the manufacturer has, in accordance with Section 1 of Annex I to this Regulation, declared the capability to meet the requirements of this Regulation on market fuels declared in point 3.2.2.2.1 of the Information Document as set out in Appendix 4 to Annex I to this Regulation, at least one test shall be conducted on each of the declared market fuels.

4.4.3. For exhaust after-treatment systems that use a reagent to reduce emissions, the reagent shall be market reagent and must comply with the specifications of the engine manufacturer. A sample of the reagent shall be taken. The reagent shall not be frozen.

#### 4.5. **Trip requirements**

The shares of operation shall be expressed as a percentage of the total trip duration.

The trip shall consist of urban driving followed by rural and motorway driving according to the shares specified in points 4.5.1 to 4.5.4. Where another testing order is justified for practical reasons and after the agreement of the approval authority another order may be used, however, the test shall always start with the urban driving.

For the purpose of this Section, ‘approximately’ shall mean the target value  $\pm 5\%$ .

Urban, rural and motorway parts can be determined either on the basis of:

- geographical coordinates (by means of a map), or
- first acceleration method.

In case the trip composition is determined on the basis of geographical coordinates, the vehicle should not exceed, for a cumulative period longer than 5 % of the total duration of each part of the trip, the following speed:

- 50 km/h in the urban part,
- 75 km/h in the rural part (90 km/h in the case of vehicles of categories M<sub>1</sub> and N<sub>1</sub>)

In case the trip composition is determined by means of the first acceleration method, the first acceleration above 55 km/h (70 km/h in the case of vehicles of categories M<sub>1</sub> and N<sub>1</sub>) shall indicate the beginning of the rural part and the first acceleration above

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

75 km/h (90 km/h in the case of vehicles of categories M<sub>1</sub> and N<sub>1</sub>) shall indicate the beginning of the motorway part.

The criteria for differentiation between urban, rural and motorway operation shall be agreed with the approval authority prior to the beginning of the test.

Average speed in urban operation shall be between 15 and 30 km/h.

Average speed in rural operation shall be between 45 and 70 km/h (60 and 90 km/h in the case of vehicles of categories M<sub>1</sub> and N<sub>1</sub>).

Average speed in motorway operation shall be above 70 km/h (90 km/h in the case of vehicles of categories M<sub>1</sub> and N<sub>1</sub>).

- 4.5.1. For M<sub>1</sub> and N<sub>1</sub> vehicles the trip shall consist of approximately 34 % urban, 33 % rural and 33 % motorway operation.
- 4.5.2. For N<sub>2</sub>, M<sub>2</sub> and M<sub>3</sub> vehicles the trip shall consist of approximately 45 % urban, 25 % rural and 30 % motorway operation. M<sub>2</sub> and M<sub>3</sub> vehicles of Class I, II or Class A as defined in UN/ECE Regulation 107 shall be tested in approximately 70 % urban and 30 % rural operation.
- 4.5.3. For N<sub>3</sub> vehicles the trip shall consist of approximately 20 % urban, 25 % rural and 55 % motorway operation.
- 4.5.4. For the purpose of the assessment of the trip composition, the duration of the share shall be calculated from the moment when the coolant temperature has reached 343 K (70 °C) for the first time or after the coolant temperature is stabilised within +/- 2 K over a period of 5 minutes whichever comes first but no later than 15 minutes after engine start. In accordance with paragraph 4.5 the period elapsed to reach the coolant temperature of 343 K (70 °C) shall be operated under urban driving conditions.

Artificial warming-up of the emission control systems prior to the test is prohibited.

- 4.5.5. The following distribution of the characteristic trip values from the WHDC database may serve as additional guidance for the evaluation of the trip:
  - (a) accelerating: 26,9 % of the time;
  - (b) decelerating: 22,6 % of the time;
  - (c) cruising: 38,1 % of the time;
  - (d) stop (vehicle speed = 0): 12,4 % of the time.;
- (5) point 4.6.5 is replaced by the following:
  - 4.6.5. The test duration shall be long enough to complete between four and seven times the work performed during the WHTC or produce between four and seven times the CO<sub>2</sub> reference mass in kg/cycle from the WHTC as applicable.;
- (6) point 4.6.10 is replaced by the following:
  - 4.6.10. If the particle exhaust after-treatment system undergoes a non-continuous regeneration event during the trip or an OBD class A or B malfunction occurs during the test, the manufacturer can request the trip to be voided.;

---

*Changes to legislation:* There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

- (7) point 5.1.2.2 is replaced by the following:
- 5.1.2.2. The conformity of the ECU torque signal is considered to be sufficient if the calculated torque remains within the full load torque tolerance specified in point 5.2.5 of Annex I.;
- (8) Appendix 1 is amended as follows:

- (a) point 1 is replaced by the following:

#### 1. INTRODUCTION

This Appendix describes the procedure to determine gaseous emissions from on-vehicle on-road measurements using portable emissions measurement systems (hereinafter ‘PEMS’). The pollutant emissions to be measured from the exhaust of the engine include the following components: carbon monoxide, total hydrocarbons and nitrogen oxides for compression ignition engines and carbon monoxide, non-methane hydrocarbons, methane and nitrogen oxides for positive ignition engines. Additionally, carbon dioxide shall be measured to enable the calculation procedures described in Sections 4 and 5.

For engines fuelled with natural gas, the manufacturer, technical service or approval authority may choose to measure the total hydrocarbon (THC) emissions only instead of measuring the methane and non-methane hydrocarbon emissions. In that case, the emission limit for the total hydrocarbon emissions is the same as the one specified in Annex I to Regulation (EC) No 595/2009 for methane emissions. For the purposes of the calculation of the conformity factors pursuant to points 4.2.3 and 4.3.2, the applicable limit shall in that case be the methane emission limit only.

For engines fuelled with gases other than natural gas, the manufacturer, technical service or approval authority may choose to measure the total hydrocarbon (THC) emissions instead of measuring the non-methane hydrocarbon emissions. In that case, the emission limit for the total hydrocarbon emissions is the same as the one specified in Annex I to Regulation (EC) No 595/2009 for non-methane hydrocarbon emissions. For the purposes of the calculation of the conformity factors pursuant to points 4.2.3 and 4.3.2, the applicable limit shall in that case be the non-methane emission limit.;

- (b) in point 2.2., the sentence ‘The parameters summarised in Table 1 shall be measured and recorded.’ is replaced by the following:

The parameters as specified in Table 1 shall be measured and recorded at a constant frequency of 1,0 Hz or higher. The original raw data shall be kept by the manufacturer and shall be made available, upon request, to the approval authority and the Commission.;

- (c) the following point 2.2.1 is inserted:

#### 2.2.1. *Data reporting format*

Emission values as well as any other relevant parameters shall be reported and exchanged as csv-formatted data file. Parameter values shall be separated by a comma, ASCII-Code #h2C. The decimal marker of numerical

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

values shall be a point, ASCII-Code #h2E. Lines shall be terminated by carriage return, ASCII-Code #h0D. No thousands separators shall be used.;

(d) points 2.6.1 and 2.6.2 are replaced by the following:

**2.6.1. Test start**

Emissions sampling, measurement of the exhaust parameters and recording of the engine and ambient data shall commence prior to starting the engine. The coolant temperature shall not exceed 303 K (30 °C) at the beginning of the test. In case ambient temperature exceeds 303 K (30 °C) at the beginning of the test, the coolant temperature shall not exceed the ambient temperature by more than 2 °C. The data evaluation shall start after the coolant temperature has reached 343 K (70 °C) for the first time or after the coolant temperature is stabilised within +/- 2 K over a period of 5 minutes whichever comes first but no later than 15 minutes after engine start.

**2.6.2. Test run**

Emission sampling, measurement of the exhaust parameters and recording of the engine and ambient data shall continue throughout the normal in-use operation of the engine. The engine may be stopped and started, but emissions sampling shall continue throughout the entire test.

Periodic zero-checks of the PEMS gas analysers may be conducted every 2 hours and the results may be used to perform a zero drift correction. The data recorded during the checks shall be flagged and shall not be used for the emission calculations.

In case of interrupted GPS signal the GPS data may be calculated based on the ECU vehicle speed and a map, for a consecutive period of less than 60 s. If the cumulative loss of GPS signal exceeds 3 % of the total trip duration, the trip should be declared void.;

(e) point 3.2.1 is replaced by the following:

**3.2.1. Analysers and EFM data**

The consistency of the data (exhaust mass flow measured by the EFM and gas concentrations) shall be verified using a correlation between the measured fuel flow from the ECU and the fuel flow calculated using the formula in paragraph 8.4.1.7 of Annex 4 to UN/ECE Regulation No 49. A linear regression shall be performed for the measured and calculated fuel rate values. The method of least squares shall be used with the best fit equation having the form:

$$y = mx + b$$

where:

- y is the calculated fuel flow [g/s]
- m is the slope of the regression line
- x is the measured fuel flow [g/s]
- b is the y intercept of the regression line

The slope (m) and the coefficient of determination ( $r^2$ ) shall be calculated for each regression line. It is recommended to perform this analysis in the range

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

from 15 % of the maximum value to the maximum value and at a frequency greater or equal to 1 Hz. For a test to be considered valid, the following two criteria shall be evaluated:

TABLE 2

**Tolerances**

Slope of the regression line, m	0,9 to 1,1 — Recommended
Coefficient of determination $r^2$	min. 0,90 — Mandatory;

(f) point 4.1 is replaced by the following:

**4.1. Averaging window principle**

The emissions shall be integrated using a moving averaging window method, based on the reference CO<sub>2</sub> mass or the reference work. The principle of the calculation is as follows: The mass emissions are not calculated for the complete data set, but for sub-sets of the complete data set, the length of these sub-sets being determined so as to match the engine CO<sub>2</sub> mass or work measured over the reference laboratory transient cycle. The moving average calculations are conducted with a time increment  $\Delta t$  equal to the data sampling period. These sub-sets used to average the emissions data are referred to as “averaging windows” in the following points.

Any invalidated data shall not be considered for the calculation of the work or CO<sub>2</sub> mass and the emissions of the averaging window.


The following data shall be considered as not valid data:

- (a) zero drift check of the instruments;
- (b) the data outside the conditions specified in points 4.2 and 4.3 of Annex II.

The mass emissions (mg/window) shall be determined as described in paragraph 8.4.2.3 of Annex 4 to UN/ECE Regulation No 49.

**Figure 1 Vehicle speed versus time and vehicle averaged emissions, starting from the first averaging window, versus time**

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

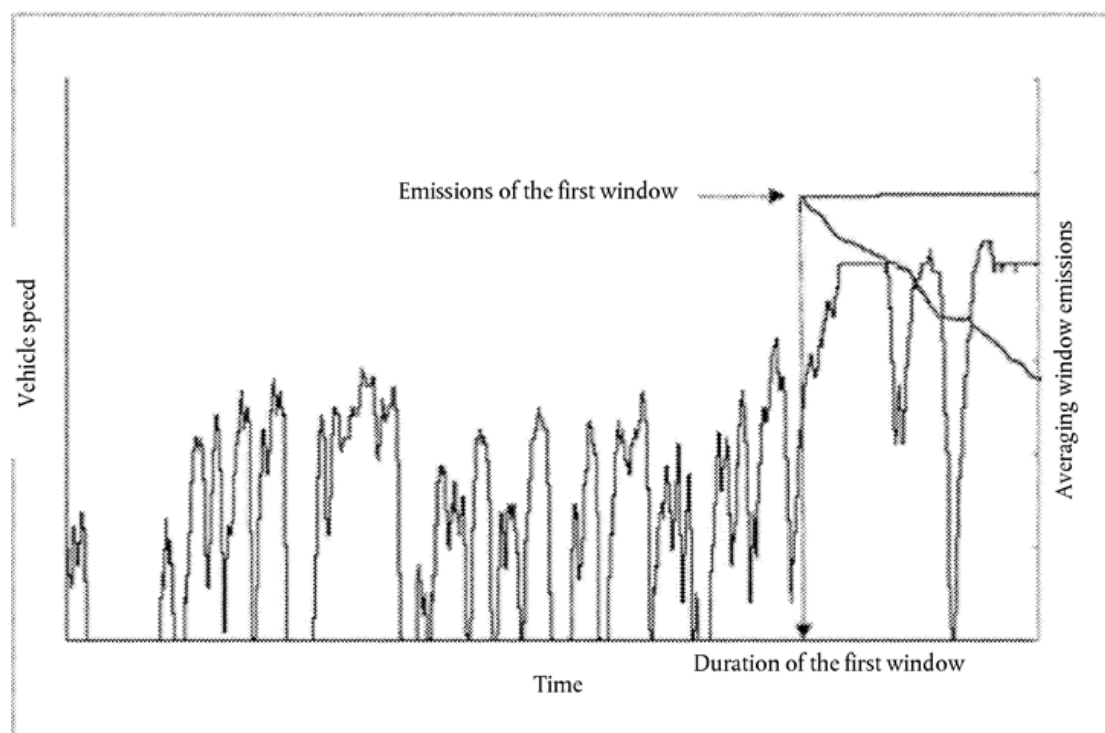

(g) point 4.2.2 is replaced by the following:

4.2.2. *Selection of valid windows*

4.2.2.1. Before the dates referred to in Article 17a, points 4.2.2.1.1 to 4.2.2.1.4 shall apply.

4.2.2.1.1. The valid windows are the windows whose average power exceeds the power threshold of 20 % of the maximum engine power. The percentage of valid windows shall be equal or greater than 50 %.

4.2.2.1.2. If the percentage of valid windows is less than 50 %, the data evaluation shall be repeated using lower power thresholds. The power threshold shall be reduced in steps of 1 % until the percentage of valid windows is equal to or greater than 50 %.

4.2.2.1.3. In any case, the lower threshold shall not be lower than 15 %.

4.2.2.1.4. The test shall be void if the percentage of valid windows is less than 50 % at a power threshold of 15 %.

4.2.2.2. From the dates referred to in Article 17a, points 4.2.2.2.1 and 4.2.2.2.2 shall apply.

4.2.2.2.1. The valid windows are the windows whose average power exceeds the power threshold of 10 % of the maximum engine power.

4.2.2.2.2. The test shall be void if the percentage of valid windows is less than 50 % or if there are no valid windows left in urban only operations after the 90 percentile rule has been applied.;

(h) point 4.3.1 is replaced by the following:

---

*Changes to legislation:* There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

#### 4.3.1. **Selection of valid windows**

4.3.1.1. Before the dates referred to in Article 17a, points 4.3.1.1.1 to 4.3.1.1.4 shall apply.

4.3.1.1.1. The valid windows shall be the windows whose duration does not exceed the maximum duration calculated from:

$$D_{max} = 3600 \times \frac{W_{ref}}{0,2 \times P_{max}}$$

where:

- D max is the maximum window duration, s,
- P max is the maximum engine power, kW.

4.3.1.1.2. If the percentage of valid windows is less than 50 %, the data evaluation shall be repeated using longer window durations. This is achieved by decreasing the value of 0,2 in the formula given in point 4.3.1 by steps of 0,01 until the percentage of valid windows is equal to or greater than 50 %.

4.3.1.1.3. In any case, the lowered value in above formula shall not be lower than 0,15.

4.3.1.1.4. The test shall be void if the percentage of valid windows is less than 50 % at a maximum window duration calculated in accordance with points 4.3.1.1, 4.3.1.1.2 and 4.3.1.1.3.

4.3.1.2. From the dates referred to in Article 17a, points 4.3.1.2.1 and 4.3.1.2.2 shall apply.

4.3.1.2.1. The valid windows shall be the windows whose duration does not exceed the maximum duration calculated from:

$$D_{max} = 3600 \times \frac{W_{ref}}{0,1 \times P_{max}}$$

where:

- D max is the maximum window duration, s,
- P max is the maximum engine power, kW.

4.3.1.2.2. The test shall be void if the percentage of valid windows is less than 50 %;

(9) in Appendix 2, point 3.1 is replaced by the following:

#### 3.1. **Exhaust gas flow meter (EFM) tailpipe connection**

The installation of the EFM shall not increase the backpressure by more than the value recommended by the engine manufacturer, nor increase the length of the tailpipe by more than 2 m. As for the all the components of the PEMS equipment, the installation of the EFM shall comply with the locally applicable road safety regulations and insurance requirements..

### ANNEX III

Annex VI to Regulation (EU) No 582/2011 is amended as follows:



---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

- (1) point 8 is replaced by the following:

8. **DOCUMENTATION**

Paragraph 11 of Annex 10 to UNECE Regulation No 49 shall be understood as follows:

The Approval Authority shall require that the manufacturer provides a documentation package. This should describe any element of design and emission control strategy of the engine system and the means by which it controls its output variables, whether that control is direct or indirect.

The information shall include a full description of the emission control strategy. In addition, this shall include information on the operation of all AES and BES, including a description of the parameters that are modified by any AES and the boundary conditions under which the AES operate, and indication of which AES and BES are likely to be active under the conditions of the test procedures in this Annex.

This documentation package shall be provided in accordance with the provisions of Section 8 of Annex I to this Regulation.

- (2) Appendix 1 is amended as follows:

- (a) the following point 2.3 is inserted

2.3. Manufacturers shall ensure that vehicles can be tested with PEMS by an independent party on public roads by making available suitable adapters for exhaust pipes, granting access to ECU signals and making the necessary administrative arrangements. The manufacturer may charge a reasonable fee as set out in Article 7(1) of Regulation (EC) No 715/2007.;

- (b) point 3.1 is replaced by the following:

3.1. **Vehicle payload**

For the purpose of the PEMS demonstration test, the payload may be reproduced and an artificial load may be used.

The vehicle payload shall be 50-60 % of the maximum vehicle payload. The additional requirements set out in Annex II shall apply..

## ANNEX IV

Annex XI to Regulation (EU) No 582/2011 is amended as follows:

- (1) point 4.3.2.4 is replaced by the following:

4.3.2.4. Durability of emissions performance

The exhaust after-treatment system tested in accordance with point 4.3.2.2 and incorporating the replacement pollution control device shall be subjected to the durability procedures described in Appendix 3.;

- (2) the following point 4.3.5 is inserted:

4.3.5. **Fuels**

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

In the case described in point 1.1.2 of Annex I, the test procedure laid down in points 4.3.1 to 4.3.2.7 of this Annex shall be conducted with the fuels declared by the manufacturer of the original engine system. However, in agreement with the type-approval authority, the durability procedure set out in Appendix 3 and referred to in point 4.3.2.4 may be performed only with the fuel which represents the worst case in terms of ageing.;

- (3) the following points 4.6 to 4.6.5 are inserted:
- 4.6. Requirements regarding compatibility with the NO<sub>x</sub> control measures (applicable only to replacement pollution control devices to be fitted to vehicles equipped with sensors directly measuring NO<sub>x</sub> concentration in the exhaust)
    - 4.6.1. NO<sub>x</sub> control measures compatibility demonstration is required only when the original pollution control device was monitored in the original configuration.
    - 4.6.2. The compatibility of the replacement pollution control device with the NO<sub>x</sub> control measures shall be demonstrated by using the procedures described in Annex XIII to this Regulation, for replacement pollution control devices intended to be fitted to engines or vehicles type-approved in accordance with Regulation (EC) No 595/2009 and this Regulation.
    - 4.6.3. The provisions in UN/ECE Regulation No 49 applicable to components other than pollution control devices shall not apply.
    - 4.6.4. The replacement pollution control device manufacturer may use the same preconditioning and test procedure as used during the original type-approval. In that case, the approval authority which granted original type-approval of an engine of a vehicle shall provide, on request and on a non-discriminatory basis, an information document presented as an appendix to the Information Document provided for in Appendix 4 to Annex I, which contains the number and type of preconditioning cycles and the type of test cycle used by the original equipment manufacturer for NO<sub>x</sub> control measures testing of the pollution control device.
    - 4.6.5. Point 4.5.5 shall apply to NO<sub>x</sub> control measures monitored by the OBD system.;
- (4) Appendix 3 is replaced by the following:

#### ‘Appendix 3

##### **Durability procedure for evaluation of emissions performance of a replacement pollution control device**

1. This Appendix sets out the durability procedure referred to in point 4.3.2.4 of Annex XI, for the purpose of evaluating the emissions performance of a replacement pollution control device.
2. **DESCRIPTION OF THE DURABILITY PROCEDURE**
  - 2.1. The durability procedure shall consist of a data collection phase and a service accumulation schedule.

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

## 2.2. Data collection phase

- 2.2.1. The selected engine, equipped with the complete exhaust after-treatment system incorporating the replacement pollution control device, shall be cooled down to ambient temperature and run one cold start WHTC test-cycle in accordance with paragraphs 7.6.1 and 7.6.2 of Annex 4 to UN/ECE Regulation No 49.
- 2.2.2. Immediately after the cold start WHTC test-cycle, the engine shall be run for nine consecutive hot start WHTC test-cycles in accordance with paragraph 7.6.4 of Annex 4 to UN/ECE Regulation No 49.
- 2.2.3. The test sequence set out in points 2.2.1 and 2.2.2 shall be carried out in accordance with the instructions laid down in paragraph 7.6.5 of Annex 4 to UN/ECE Regulation No 49.
- 2.2.4. Alternatively, the relevant data can be collected by driving a fully loaded vehicle equipped with the selected exhaust after-treatment system incorporating the replacement pollution control device. The test can be carried out either on the road following the trip requirements of points 4.5 to 4.5.5 of Annex II to this Regulation with comprehensive recording of the driving data, or on a suitable chassis dynamometer. If an on-road test is chosen, the vehicle shall be driven over a cold test-cycle, as set out in Appendix 5 to this Annex, followed by nine hot test-cycles, identical to the cold one, in a way that the work developed by the engine is the same as the one achieved under points 2.2.1 and 2.2.2. If a chassis dynamometer is chosen, the simulated road gradient of the test-cycle in Appendix 5 shall be adapted to match the work developed by the engine over the WHTC.
- 2.2.5. The type-approval authority shall refuse the temperature data obtained under point 2.2.4 if it deems those data to be unrealistic and shall request either the repetition of the test, or the carrying out of a test pursuant to points 2.2.1, 2.2.2 and 2.2.3.
- 2.2.6. Temperatures in the replacement pollution control device shall be recorded during the whole test sequence, at the location with the highest temperature.
- 2.2.7. In cases where the location with the highest temperature varies over time, or where that location is difficult to define, multiple bed temperatures should be recorded at suitable locations.
- 2.2.8. The number and locations of the temperature measurements shall be selected by the manufacturer, in agreement with the type-approval authority, based on best engineering judgement.
- 2.2.9. With the agreement of the type-approval authority, a single catalyst bed temperature or the catalyst inlet temperature may be used if measuring multiple bed temperatures is proven to be unfeasible or too difficult.

*Figure 1*

*Changes to legislation:* There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

### Example of temperature sensors location in a generic after-treatment device


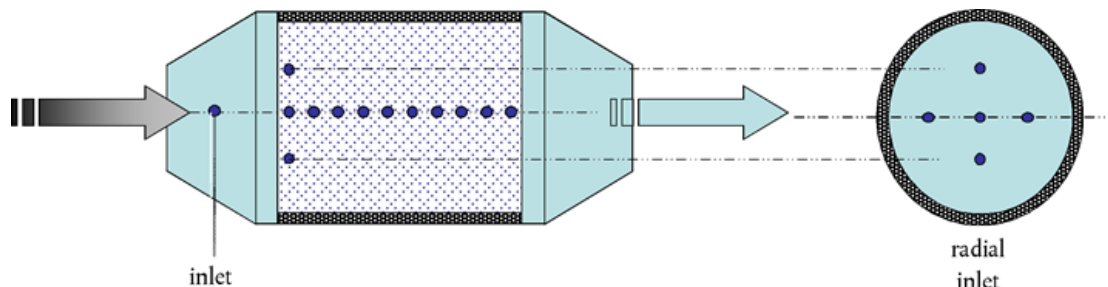


Figure 2

### Example of temperature sensors location for DPF

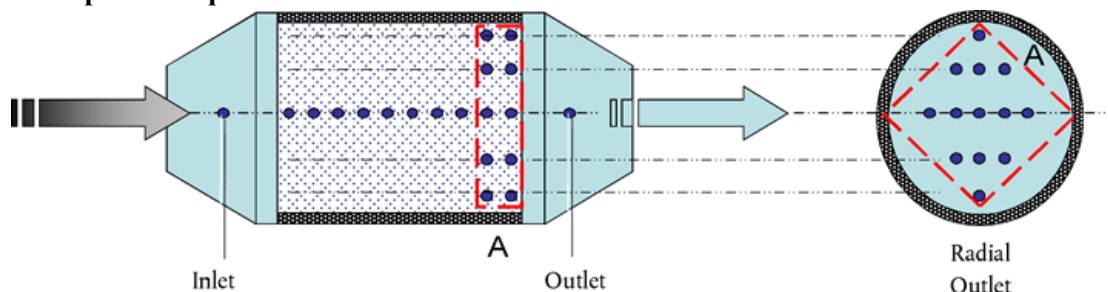

- 2.2.10. The temperatures shall be measured and recorded at a minimum rate of once every second (1 Hz) during the test sequence.
- 2.2.11. The measured temperatures shall be tabulated into a histogram with temperature bins no larger than 10 °C. In the case mentioned in point 2.2.7, the highest temperature each second shall be the one recorded in the histogram. Each bar of the histogram shall represent the cumulated frequency in seconds of the measured temperatures falling in the specific bin.
- 2.2.12. The time in hours corresponding to each temperature bin must be determined and then extrapolated to the useful life of the replacement pollution control device, in accordance with the values specified in Table 1. The extrapolation shall be based on the assumption that one WHTC cycle corresponds to 20 km driving.

TABLE 1

### Useful life of the replacement pollution control device for each vehicle category, and equivalent WHTC test-cycles and hours of operation

Vehicle category	Mileage (km)	Equivalent number of WHTC test-cycles	Equivalent number of hours
Engine systems fitted to vehicles of category M <sub>1</sub> , N <sub>1</sub> and N <sub>2</sub>	114 286	5 714	2 857

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

Engine systems fitted to vehicles of category N <sub>2</sub> , N <sub>3</sub> with a maximum technically permissible mass not exceeding 16 tonnes and M <sub>3</sub> Class I, Class II and Class A, and Class B with a maximum technically permissible mass exceeding 7,5 tonnes	214 286	10 714	5 357
Engine systems fitted to vehicles of category N <sub>3</sub> with a maximum technically permissible mass exceeding 16 tonnes, and M <sub>3</sub> , Class III and Class B with a maximum technically permissible mass exceeding 7,5 tonnes	500 000	25 000	12 500

- 2.2.13. It is allowed to perform the data collection phase for different devices at the same time.
- 2.2.14. In the case of systems operating in the presence of active regeneration, the number, length and temperatures of the regenerations occurring during the test sequence defined in points 2.2.1 and 2.2.2 shall be recorded. If no active regeneration has occurred, the hot sequence defined in point 2.2.2 shall be extended in order to include at least two active regenerations.
- 2.2.15. The total lubricant consumed during the data collection period, in g/h, shall be recorded, using any suitable method, as for example the drain and weigh procedure described in Appendix 6. For this purpose, the engine shall be run during 24 hours, performing consecutive WHTC test-cycles. In cases where an accurate measurement of oil consumption cannot be obtained, the manufacturer, in agreement with the type-approval authority, may use the following options for the determination of the lubricant consumption:
- (a) a default value of 30 g/h;
  - (b) a value requested by the manufacturer, based on sound data and information, and agreed with the type-approval authority.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

### 2.3. Calculation of the equivalent ageing time corresponding to a reference temperature

2.3.1. The temperatures recorded pursuant to points 2.2 to 2.2.15 shall be reduced to a reference temperature  $T_r$ , requested by the manufacturer in agreement with the type-approval authority, within the range of the temperatures recorded during the data collection phase.

2.3.2. In the case specified in point 2.2.13, the value of  $T_r$  for each one of the devices may vary.

2.3.3. The equivalent ageing time corresponding to the reference temperature shall be calculated, for each bin referred to in 2.2.11, in accordance with the following equation:

Equation 1:

$$t_i^e = t_i^{\text{bin}} \times e^{\left(\left(\frac{R}{T_r}\right) - \left(\frac{R}{T_i^{\text{bin}}}\right)\right)}$$

Where:

$R$  = thermal reactivity of the replacement pollution control device.

The following values shall be used:

- Diesel oxidation catalyst (DOC): 18 050
- Catalysed DPF: 18 050
- SCR or ammonia oxidation catalyst (AMOX) based on iron-zeolite (Fe-Z): 5 175
- SCR copper-zeolite (Cu-Z): 11 550
- SCR Vanadium (V): 5 175
- LNT (lean-NO<sub>x</sub> trap): 18 050

$T_r$  = reference temperature, in K.

$T_i^{\text{bin}}$  = mid-point temperature, in K, of the temperature bin  $i$  to which the replacement pollution control device is exposed during the data collection phase, registered in the temperature histogram.

$t_i^{\text{bin}}$  = the time, in hours, corresponding to the temperature

$T_i^{\text{bin}}$ , adjusted to a full useful life basis e.g. if the histogram represented 5 hours, and useful life is 4 000 hours according to Table 1, all histogram time entries would be multiplied by

$$\frac{4000}{5} = 800$$

$t_i^e$  = the equivalent ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device at the temperature

$T_i^{\text{bin}}$  during the time

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

$i$  = bin number, where 1 is number for the bin with the lowest temperature and  $n$  the value for the bin with the highest temperature.

2.3.4. The total equivalent ageing time shall be calculated in accordance with the following equation:

Equation 2:

$$AT = \sum_{i=1}^n t_i^e$$

Where:

$AT$  = total equivalent ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device, over its useful life, to the temperature

$$T_i^{bin}$$

during the time

$$t_i^{bin}$$

of each one of the  $i$  bins registered in the histogram.

$t_i^e$  = the equivalent ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device at the temperature

$$T_i^{bin}$$

during the time

$$t_i^{bin}$$

$i$  = bin number, where 1 is number for the bin with the lowest temperature and  $n$  the value for the bin with the highest temperature.

$n$  = Total number of temperature bins.

2.3.5. In the case referred to in point 2.2.13,  $AT$  shall be calculated for each device.

## 2.4. Service accumulation schedule

### 2.4.1. General requirements

2.4.1.1. The service accumulation schedule shall allow acceleration of the ageing of the replacement pollution control device, using the information gathered during the data collection phase set out in point 2.2.

2.4.1.2. The service accumulation schedule shall consist of a thermal accumulation schedule and a lubricant consumption accumulation schedule in accordance with point 2.4.4.6. The manufacturer, in agreement with the type-approval authority, may not have to carry out a lubricant consumption accumulation schedule in case the replacement pollution control devices are placed downstream of an after-treatment filter component (e.g. diesel

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

particulate filter). Both the thermal accumulation schedule and the lubricant consumption accumulation schedule shall consist of a repetition of, respectively, a series of thermal and lubricant consumption sequences.

- 2.4.1.3. In the case of replacement pollution control devices operating in the presence of active regeneration, the thermal sequence shall be complemented with an active regeneration mode.
- 2.4.1.4. For service accumulation schedules consisting of both thermal and lubricant consumption accumulation schedules, their respective sequences shall be alternated, so that for each thermal sequence that has to be performed, the following sequence corresponds to lubricant consumption.
- 2.4.1.5. It is allowed to perform the service accumulation schedule at the same time for different devices. In that case, a single service accumulation schedule shall be set for all the devices.
- 2.4.2. Thermal accumulation schedule
- 2.4.2.1. The thermal accumulation schedule shall simulate the effect of thermal ageing on the performance of a replacement pollution control device until the end of its lifetime.
- 2.4.2.2. The engine used for the performance of the service accumulation schedule, fitted with the exhaust after-treatment system incorporating the replacement pollution control device, is operated for a minimum of three consecutive thermal sequences, as set out in Appendix 4.
- 2.4.2.3. The temperatures shall be recorded over a minimum of two thermal sequences. The first sequence, conducted for warming up, shall not be taken into account for the purpose of temperature gathering.
- 2.4.2.4. The temperatures shall be recorded at suitable locations, chosen in accordance with points 2.2.6 to 2.2.9, at a minimum rate of once every second (1 Hz).
- 2.4.2.5. The effective ageing time corresponding to the thermal sequences referred to in point 2.4.2.3, shall be calculated in accordance with the following equations:

Equation 3:

$$t_i^e = \frac{\sum_{c=1}^c \left( \left( \frac{K}{T_r} \right) - \left( \frac{K}{T_i} \right) \right)}{c}$$

Equation 4:

$$AE = \sum_{i=1}^p t_i^e$$

Where:

- $t_i^e$  = the effective ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device at the temperature  $T_i$  during the second  $i$ .
- $T_i$  = the temperature, in  $K$ , measured in the second  $i$ , in each one of the thermal sequences.



---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

- $R$  = thermal reactivity of the replacement pollution control device. The manufacturer shall agree with the type-approval authority on the  $R$  value to be used. It will also be possible, as alternative, to use the following default values:
- Diesel oxidation catalyst (DOC): 18 050.
  - Catalysed DPF: 18 050
  - SCR or ammonia oxidation catalyst (AMOX) based on iron-zeolite (Fe-Z): 5 175
  - SCR copper-zeolite (Cu-Z): 11 550
  - SCR Vanadium (V): 5 175
  - LNT (lean-NO<sub>x</sub> trap): 18 050
- $T_r$  = reference temperature, in  $K$ , being the same value as in equation 1.
- $AE$  = Effective ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device during the duration of the thermal sequence.
- $AT$  = total equivalent ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device, over its useful life, to the temperature
- $T_i^{\text{bin}}$
- during the time
- $t_i^{\text{bin}}$
- of each one of the  $i$  bins registered in the histogram.
- $i$  = number of temperature measurement.
- $p$  = total number of temperature measurements.
- $n_c$  = thermal sequence number, of those conducted for the purpose of temperature gathering, in accordance with point 2.4.2.3.
- $C$  = total number of thermal sequences conducted for the purpose of temperature gathering.

2.4.2.6. The total number of thermal sequences to be included in the service accumulation schedule shall be determined by applying the following equation:

Equation 5:

$$N_{TS} = AT/AE$$

Where:

- $N_{TS}$  = total number of thermal sequences to be carried out during the service accumulation schedule
- $AT$  = total equivalent ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

ageing as the one that would result from exposure of the replacement pollution control device, over its useful life, to the temperature

$$T_i^{\text{bin}}$$

during the time

$$t_i^{\text{bin}}$$

of each one of the  $i$  bins registered in the histogram.

$AE$  = Effective ageing time, in hours, needed to achieve, by exposing the replacement pollution control device at the temperature  $T_r$ , the same amount of ageing as the one that would result from exposure of the replacement pollution control device during the duration of the thermal sequence.

2.4.2.7. It is allowed to reduce  $N_{TS}$  and, consequently the service accumulation schedule, by increasing the temperatures at which each device is exposed at each mode of the ageing cycle through the application of one or several of the following measures:

- (a) insulating the exhaust pipe;
- (b) moving the replacement pollution control device closer to the exhaust manifold;
- (c) artificially heating up the temperature of the exhaust;
- (d) optimising the engine settings without substantially changing the emission behaviour of the engine.

2.4.2.8. When applying the measures referred to in points 2.4.4.6 and 2.4.4.7, the total ageing time calculated from  $N_{TS}$  shall not be less than 10 % of the useful life listed in Table 1, e.g. the vehicle category  $N_I$  shall not have an  $N_{TS}$  of less than 286 thermal sequences, assuming that each sequence is 1 hour long.

2.4.2.9. It is allowed to increase  $N_{TS}$  and, consequently, the duration of the service accumulation schedule, by lowering the temperatures at each mode of the ageing cycle through the application of one or several of the following measures:

- (a) moving the replacement pollution control device further away from the exhaust manifold;
- (b) artificially cooling down the temperature of the exhaust;
- (c) optimising the engine settings.

2.4.2.10. In the case referred to in point 2.4.1.5, the following shall apply:

2.4.2.10.1  $N_{TS}$  shall be the same for each device, so that a single service accumulation schedule can be set up.

2.4.2.10.2 In order to achieve the same  $N_{TS}$  for each device, a first  $N_{TS}$  value shall be calculated for each device, with its own  $AT$  and  $AE$  values.

2.4.2.10.3 If the calculated  $N_{TS}$  values are different, one or more of the measures set out in points 2.4.2.7 to 2.4.2.10 may be applied on the device or devices

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

for which  $N_{TS}$  needs to be modified, over the thermal sequences referred to in point 2.4.2.3, in order to influence the measured  $T_i$  and therefore conveniently speed up or slow down the artificial ageing of the targeted device or devices.

2.4.2.10.4 The new  $N_{TS}$  values corresponding to the new temperatures  $T_i$  obtained in point 2.4.2.10.3 shall be calculated.

2.4.2.10.5 The steps set out in points 2.4.2.10.3 and 2.4.2.10.4 shall be repeated until the  $N_{TS}$  values obtained for each device in the system match.

2.4.2.10.6 The  $T_r$  values used for obtaining the different  $N_{TS}$  in points 2.4.2.10.4 and 2.4.2.10.5 shall be the same ones as those used in points 2.3.2 and 2.3.5 for calculating  $AT$  for each device.

2.4.2.11. In the case of an assembly of replacement pollution control devices constituting a system within the meaning of Article 3(25) of Directive 2007/46/EC, one of the following two options may be considered for the thermal ageing of the devices:

2.4.2.11.1 The devices within the assembly may be either separately or jointly aged, in accordance with point 2.4.2.10.

2.4.2.11.2 If the assembly is built in such a way that it is not possible to decouple the devices (e.g. DOC + SCR in a can), the thermal ageing of the assembly shall be carried out with the highest  $N_{TS}$ .

2.4.3. Modified thermal accumulation schedule for devices operating in the presence of active regeneration

2.4.3.1. The modified thermal accumulation schedule for devices operating in the presence of active regeneration shall simulate the effect of ageing due to both thermal load and active regeneration on a replacement pollution control device at the end of its lifetime.

2.4.3.2. The engine used for the service accumulation schedule, fitted with the exhaust after-treatment system incorporating the replacement pollution control device, is operated for a minimum of three modified thermal sequences, consisting each sequence of a thermal sequence as set out in Appendix 4, followed by a complete active regeneration, during which the peak temperature reached in the after-treatment system should be not lower than the peak temperature recorded in the data collection phase.

2.4.3.3. The temperatures shall be recorded over a minimum of two modified thermal sequences. The first sequence, conducted for warming up, shall not be taken into account for the purpose of temperature gathering.

2.4.3.4. In order to minimise the time elapsed between the thermal sequence as set out in Appendix 4 and the subsequent active regeneration, the manufacturer may artificially trigger the active regeneration by running, after each thermal sequence as set out in Appendix 4, the engine at a steady mode that enables a high production of soot by the engine. In that case, the steady mode shall also be considered as part of the modified thermal sequence set out in point 2.4.3.2.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

- 2.4.3.5. The effective ageing time corresponding to each modified thermal sequence shall be calculated using equations 3 and 4.
- 2.4.3.6. The total number of modified thermal sequences to be conducted during the service accumulation schedule shall be calculated using equation 5.
- 2.4.3.7. It is allowed to reduce  $N_{TS}$ , and consequently the duration of the service accumulation schedule, by increasing the temperatures at each mode of the modified thermal sequence, applying one or several of the measures set out in point 2.4.2.7.
- 2.4.3.8. In addition to the measures referred to in point 2.4.3.7,  $N_{TS}$  can also be reduced by increasing the peak temperature of the active regeneration within the modified thermal sequence, without exceeding a bed temperature of 800 °C under any circumstances.
- 2.4.3.9.  $N_{TS}$  shall never be less than 50 % of the number of active regenerations to which the replacement pollution control device is subjected during its useful life, calculated in accordance with the following equation:

Equation 5:

$$N_{AR} = \frac{t_{WHTC}}{t_{AR} + t_{BAR}}$$

Where:

- $N_{AR}$  = number of active regeneration sequences over the useful life of the replacement pollution control device.
- $t_{WHTC}$  = equivalent number of hours corresponding to the vehicle category for which the replacement pollution control device is intended, obtained from Table 1.
- $t_{AR}$  = duration, in hours, of an active regeneration.
- $t_{BAR}$  = time, in hours, between two consecutive active regenerations.

- 2.4.3.10. If, as consequence of the application of the minimum number of modified thermal sequences as set out in point 2.4.3.9,  $AE \times N_{TS}$  calculated using equation 4 exceeds the  $AT$  calculated using equation 2, the time of each mode of the thermal sequence set out in Appendix 4, and embedded in the modified thermal sequence as set out in point 2.4.3.2, may be reduced in the same proportion, in order to make  $AE \times N_{TS} = AT$ .
- 2.4.3.11. It is allowed to increase  $N_{TS}$  and consequently the duration of the service accumulation schedule, by lowering the temperatures at each mode of the thermal-active regeneration sequence by applying one or several of the measures set out in point 2.4.2.9.
- 2.4.3.12. In the case referred to in point 2.4.1.5, points 2.4.2.10 and 2.4.2.11 shall apply
- 2.4.4. Lubricant consumption accumulation schedule
- 2.4.4.1. The lubricant consumption accumulation schedule shall simulate the effect of ageing due to chemical poisoning or deposit formation as a result of lubricant consumption, on the performance of a replacement pollution control device at the end of its lifetime.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

- 2.4.4.2. The lubricant consumed, in g/h, shall be determined over a minimum of 24 thermal sequences or a corresponding number of modified thermal sequences, using any suitable method, as for example the drain and weigh procedure described in Appendix 6. Fresh lubricant shall be used.
- 2.4.4.3. The engine shall be equipped with a constant volume oil sump in order to avoid the need of “top-offs”, since oil level influences the oil consumption rate. Any suitable method, as for example the one described in the ASTM standard D7156-09, may be used.
- 2.4.4.4. The theoretical time, in hours, that the thermal accumulation schedule or modified thermal accumulation schedule, as it corresponds, would have to be conducted, in order to obtain the same lubricant consumption as the one corresponding to the useful life of the replacement control device, shall be calculated by applying the following equation:

Equation 6:

$$t_{TAS} = \frac{LCR_{WHTC} \cdot t_{WHTC}}{LCR_{TAS}}$$

Where:

- $t_{TAS}$  = theoretical duration, in hours, of the service accumulation schedule required to obtain the same lubricant consumption as the one corresponding to the useful life of the replacement pollution control device, provided that the service accumulation schedule is only made up of a series of consecutive thermal sequences or consecutive modified thermal sequences.
- $LCR_{WHTC}$  = lubricant consumption rate, in g/h determined as set out in point 2.2.15.
- $t_{WHTC}$  = equivalent number of hours corresponding to the vehicle category for which the replacement pollution control device is intended, obtained from Table 1.
- $LCR_{TAS}$  = lubricant consumption rate, in g/h, determined as set out in point 2.4.4.2.

- 2.4.4.5. The number of thermal sequences or modified thermal sequences corresponding to  $t_{TAS}$  shall be calculated by applying the following ratio:

Equation 7:

$$N = \frac{t_{TAS}}{T_{TS}}$$

Where:

- $N$  = number of thermal sequences or modified thermal sequences corresponding to  $t_{TAS}$ .
- $t_{TAS}$  = theoretical duration, in hours, of the service accumulation schedule required to obtain the same lubricant consumption as the one corresponding to the useful life of the replacement pollution control device, provided that the service accumulation schedule was only made up of a series of consecutive thermal sequences or consecutive modified thermal sequences.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

$t_{TS}$  = duration, in hours, of a single thermal sequence or modified thermal sequence.

- 2.4.4.6. The value of  $N$  shall be compared to the value of  $N_{TS}$  calculated in accordance with point 2.4.2.6 or, for devices operating in the presence of active regeneration, in accordance with point 2.4.3.5. If  $N \leq N_{TS}$ , it is not necessary to add a lubricant consumption accumulation schedule to the thermal accumulation schedule. If  $N > N_{TS}$ , a lubricant consumption accumulation schedule shall be added to the thermal accumulation schedule.
- 2.4.4.7. A lubricant consumption accumulation schedule may not have to be added if, by increasing the lubricant consumption as described in point 2.4.4.8.4, the needed lubricant consumption is already achieved with the conduction of the corresponding thermal accumulation schedule consisting of the performance of  $N_{TS}$  thermal sequences or modified thermal sequences.
- 2.4.4.8. Development of the lubricant consumption accumulation schedule
- 2.4.4.8.1. The lubricant consumption accumulation schedule shall consist of a number of lubricant consumption sequences repeated several times, each lubricant consumption sequence being alternated with each thermal sequence or each modified thermal sequence.
- 2.4.4.8.2. Each lubricant consumption sequence shall consist of a steady mode at constant load and speed, the load and the speed being selected in such a way that the lubricant consumption is maximised and effective thermal aging is minimised. The mode shall be determined by the manufacturer in agreement with the type-approval authority, based on best engineering judgement.
- 2.4.4.8.3. The duration of each lubricant consumption sequence shall be determined as follows:
- 2.4.4.8.3. The engine shall be run for an appropriate period of time at the load and speed determined by the manufacturer in accordance with point 2.4.4.8.2 and the lubricant consumed, in g/h, shall be determined using any suitable method, as for example the drain and weigh procedure described in Appendix 6. Lubricant changes are to be completed at the recommended intervals.
- 2.4.4.8.3. The duration of each lubricant consumption sequence shall be calculated by applying the following equation:

Equation 8:

$$t_{LS} = \frac{LCR_{WHTC} \times t_{WHTC} - LCR_{EAS} \times N_{TS} \times t_{TS}}{LCR_{LAS} \times N_{TS}}$$

Where:

- $t_{LS}$  = the duration, in hours, of a single lubricant consumption sequence
- $LCR_{WHTC}$  = lubricant consumption rate, in g/h determined as set out in point 2.2.15.
- $t_{WHTC}$  = equivalent number of hours corresponding to the vehicle category for which the replacement pollution control device is intended, obtained from Table 1.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

$LCR_{TAS}$	=	lubricant consumption rate, in g/h, determined as set out in point 2.4.4.2.
$LCR_{LAS}$	=	lubricant consumption rate, in g/h, determined as set out in point 2.4.4.8.3.1.
$t_{TS}$	=	duration, in hours, of a single thermal sequence, as set out in Appendix 4, or modified thermal sequence, as set out in point 2.4.3.2.
$N_{TS}$	=	total number of thermal sequences or modified thermal sequences to be carried out during the service accumulation schedule.

2.4.4.8.4. The lubricant consumption rate shall always remain below 0,5 % of the engine fuel consumption rate in order to avoid excessive ash accumulation on the front face of the replacement pollution control device.

2.4.4.8.5. It is allowed to add the thermal ageing due to the conduction of the lubricant consumption sequence to the  $AE$  calculated in equation 4.

2.4.5. Development of the complete service accumulation schedule

2.4.5.1. The service accumulation schedule shall be built up alternating a thermal or a modified thermal sequence, as appropriate, with a lubricant consumption sequence. The aforementioned pattern shall be repeated  $N_{TS}$  times, being the  $N_{TS}$  value the one calculated either in accordance with Section 2.4.2 or with Section 2.4.3, as appropriate. An example of a complete service accumulation schedule is given in Appendix 7. A flowchart describing the development of a complete service accumulation schedule is given in Appendix 8.

2.4.6. Operation of the service accumulation schedule

2.4.6.1. The engine, fitted with the exhaust after-treatment system incorporating the replacement pollution control device, shall run the service accumulation schedule set out in point 2.4.5.1.

2.4.6.2. The engine used for the performance of the service accumulation schedule may be different to the engine used in the data collection phase, being the latter always the one for which the replacement pollution control device to be type-approved has been designed, and the one to be tested for emissions under point 2.4.3.2.

2.4.6.3. If the engine used for the performance of the service accumulation schedule features a larger displacement by 20 % or more than the engine used in the data collection phase, the exhaust system of the former should be equipped with a by-pass in order to replicate as closely as possible the exhaust flow rate of the latter at the ageing conditions selected.

2.4.6.4. In the case referred to in point 2.4.6.2, the engine used for the performance of the service accumulation schedule shall be type-approved under Regulation (EC) No 595/2009. In addition, if the device or devices under test are intended for being fitted in an engine system with exhaust gas recirculation (EGR), the engine system used for the service accumulation schedule shall also be fitted with an EGR. If the device or devices under test are intended

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

for not being fitted in an engine system with EGR, the engine system used for the service accumulation schedule shall also not be fitted with an EGR.

- 2.4.6.5. The lubricant and the fuel used in the service accumulation schedule shall be as similar as possible to those used during the data collection phase set out in point 2.2. The lubricant must be in line with the recommendation of the engine manufacturer for which the pollution control device is designed. The fuels used should be market fuels fulfilling the corresponding requirements of Directive 98/70/EC. On the request of the manufacturer also reference fuels in accordance with this Regulation can be used.
- 2.4.6.6. The lubricant shall be changed for maintenance, at the intervals scheduled by the manufacturer of the engine used in the data collection phase.
- 2.4.6.7. In the case of an SCR, the urea injection shall be performed in accordance with the strategy defined by the manufacturer of the replacement pollution control device.;

- (5) the following Appendices 4 to 8 are added:

#### Appendix 4

##### Sequence for thermal ageing

Mode	Speed (% of high idle)	Load (% for a given speed)	Time (s)
1	2,92	0,58	626
2	45,72	1,58	418
3	38,87	3,37	300
4	20,23	11,36	102
5	11,37	14,90	62
6	32,78	18,52	370
7	53,12	20,19	410
8	59,53	34,73	780
9	78,24	54,38	132
10	39,07	62,85	212
11	47,82	62,94	188
Regeneration mode (if applicable)	To be defined (see point 2.4.3.4)	To be defined (see point 2.4.3.4)	To be defined (see point 2.4.3.4)
Lubricant consumption mode (if applicable)	To be defined according to point 2.4.4.8.2	To be defined according to point 2.4.4.8.2	To be defined according to point 2.4.4.8.3

*Note:* The sequence of the modes 1 to 11 has been arranged by ascending load in order to maximise the temperature of the exhaust gas in the high load modes. With the agreement of the type-approval authority, this order can be



**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

modified in order to optimise the temperature of the exhaust gas if this can help in reducing the actual aging time.

### Appendix 5

#### Test-cycle for chassis dynamometer or on-road data gathering

Time s	Speed km/h	Time s	Speed km/h	Time s	Speed km/h	Time s	Speed km/h	Time s	Speed km/h	Time s	Speed km/h	Time s	Speed km/h
1	0	261	22,38	521	35,46	781	18,33	1 041	39,88	1 301	66,39	1 561	86,88
2	0	262	24,75	522	36,81	782	18,31	1 042	41,25	1 302	66,74	1 562	86,7
3	0	263	25,55	523	37,98	783	18,05	1 043	42,07	1 303	67,43	1 563	86,81
4	0	264	25,18	524	38,84	784	17,39	1 044	43,03	1 304	68,44	1 564	86,81
5	0	265	23,94	525	39,43	785	16,35	1 045	44,4	1 305	69,52	1 565	86,81
6	0	266	22,35	526	39,73	786	14,71	1 046	45,14	1 306	70,53	1 566	86,81
7	2,35	267	21,28	527	39,8	787	11,71	1 047	45,44	1 307	71,47	1 567	86,99
8	5,57	268	20,86	528	39,69	788	7,81	1 048	46,13	1 308	72,32	1 568	87,03
9	8,18	269	20,65	529	39,29	789	5,25	1 049	46,79	1 309	72,89	1 569	86,92
10	9,37	270	20,18	530	38,59	790	4,62	1 050	47,45	1 310	73,07	1 570	87,1
11	9,86	271	19,33	531	37,63	791	5,62	1 051	48,68	1 311	73,03	1 571	86,85
12	10,18	272	18,23	532	36,22	792	8,24	1 052	50,13	1 312	72,94	1 572	87,14
13	10,38	273	16,99	533	34,11	793	10,98	1 053	51,16	1 313	73,01	1 573	86,96
14	10,57	274	15,56	534	31,16	794	13,15	1 054	51,37	1 314	73,44	1 574	86,85
15	10,95	275	13,76	535	27,49	795	15,47	1 055	51,3	1 315	74,19	1 575	86,77
16	11,56	276	11,5	536	23,63	796	18,19	1 056	51,15	1 316	74,81	1 576	86,81

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

17	12,22	277	8,68	537	20,16	797	20,79	1 057	50,88	1 317	75,01	1 577	86,85
18	12,97	278	5,2	538	17,27	798	22,5	1 058	50,63	1 318	74,99	1 578	86,74
19	14,33	279	1,99	539	14,81	799	23,19	1 059	50,2	1 319	74,79	1 579	86,81
20	16,38	280	0	540	12,59	800	23,54	1 060	49,12	1 320	74,41	1 580	86,7
21	18,4	281	0	541	10,47	801	24,2	1 061	48,02	1 321	74,07	1 581	86,52
22	19,86	282	0	542	8,85	802	25,17	1 062	47,7	1 322	73,77	1 582	86,7
23	20,85	283	0,5	543	8,16	803	26,28	1 063	47,93	1 323	73,38	1 583	86,74
24	21,52	284	0,57	544	8,95	804	27,69	1 064	48,57	1 324	72,79	1 584	86,81
25	21,89	285	0,6	545	11,3	805	29,72	1 065	48,88	1 325	71,95	1 585	86,85
26	21,98	286	0,58	546	14,11	806	32,17	1 066	49,03	1 326	71,06	1 586	86,92
27	21,91	287	0	547	15,91	807	34,22	1 067	48,94	1 327	70,45	1 587	86,88
28	21,68	288	0	548	16,57	808	35,31	1 068	48,32	1 328	70,23	1 588	86,85
29	21,21	289	0	549	16,73	809	35,74	1 069	47,97	1 329	70,24	1 589	87,1
30	20,44	290	0	550	17,24	810	36,23	1 070	47,92	1 330	70,32	1 590	86,81
31	19,24	291	0	551	18,45	811	37,34	1 071	47,54	1 331	70,3	1 591	86,99
32	17,57	292	0	552	20,09	812	39,05	1 072	46,79	1 332	70,05	1 592	86,81
33	15,53	293	0	553	21,63	813	40,76	1 073	46,13	1 333	69,66	1 593	87,14
34	13,77	294	0	554	22,78	814	41,82	1 074	45,73	1 334	69,26	1 594	86,81
35	12,95	295	0	555	23,59	815	42,12	1 075	45,17	1 335	68,73	1 595	86,85
36	12,95	296	0	556	24,23	816	42,08	1 076	44,43	1 336	67,88	1 596	87,03

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

37	13,35	297	0	557	24,9	817	42,27	1 077	43,59	1 337	66,68	1 597	86,92
38	13,75	298	0	558	25,72	818	43,03	1 078	42,68	1 338	65,29	1 598	87,14
39	13,82	299	0	559	26,77	819	44,14	1 079	41,89	1 339	63,95	1 599	86,92
40	13,41	300	0	560	28,01	820	45,13	1 080	41,09	1 340	62,84	1 600	87,03
41	12,26	301	0	561	29,23	821	45,84	1 081	40,38	1 341	62,21	1 601	86,99
42	9,82	302	0	562	30,06	822	46,4	1 082	39,99	1 342	62,04	1 602	86,96
43	5,96	303	0	563	30,31	823	46,89	1 083	39,84	1 343	62,26	1 603	87,03
44	2,2	304	0	564	30,29	824	47,34	1 084	39,46	1 344	62,87	1 604	86,85
45	0	305	0	565	30,05	825	47,66	1 085	39,15	1 345	63,55	1 605	87,1
46	0	306	0	566	29,44	826	47,77	1 086	38,9	1 346	64,12	1 606	86,81
47	0	307	0	567	28,6	827	47,78	1 087	38,67	1 347	64,73	1 607	87,03
48	0	308	0	568	27,63	828	47,64	1 088	39,03	1 348	65,45	1 608	86,77
49	0	309	0	569	26,66	829	47,23	1 089	40,37	1 349	66,18	1 609	86,99
50	1,87	310	0	570	26,03	830	46,66	1 090	41,03	1 350	66,97	1 610	86,96
51	4,97	311	0	571	25,85	831	46,08	1 091	40,76	1 351	67,85	1 611	86,96
52	8,4	312	0	572	26,14	832	45,45	1 092	40,02	1 352	68,74	1 612	87,07
53	9,9	313	0	573	27,08	833	44,69	1 093	39,6	1 353	69,45	1 613	86,96
54	11,42	314	0	574	28,42	834	43,73	1 094	39,37	1 354	69,92	1 614	86,92
55	15,11	315	0	575	29,61	835	42,55	1 095	38,84	1 355	70,24	1 615	87,07
56	18,46	316	0	576	30,46	836	41,14	1 096	37,93	1 356	70,49	1 616	86,92

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

57	20,21	317	0	577	30,99	837	39,56	1 097	37,19	1 357	70,63	1 617	87,14
58	22,13	318	0	578	31,33	838	37,93	1 098	36,21	1 358	70,68	1 618	86,96
59	24,17	319	0	579	31,65	839	36,69	1 099	35,32	1 359	70,65	1 619	87,03
60	25,56	320	0	580	32,02	840	36,27	1 100	35,56	1 360	70,49	1 620	86,85
61	26,97	321	0	581	32,39	841	36,42	1 101	36,96	1 361	70,09	1 621	86,77
62	28,83	322	0	582	32,68	842	37,14	1 102	38,12	1 362	69,35	1 622	87,1
63	31,05	323	0	583	32,84	843	38,13	1 103	38,71	1 363	68,27	1 623	86,92
64	33,72	324	3,01	584	32,93	844	38,55	1 104	39,26	1 364	67,09	1 624	87,07
65	36	325	8,14	585	33,22	845	38,42	1 105	40,64	1 365	65,96	1 625	86,85
66	37,91	326	13,88	586	33,89	846	37,89	1 106	43,09	1 366	64,87	1 626	86,81
67	39,65	327	18,08	587	34,96	847	36,89	1 107	44,83	1 367	63,79	1 627	87,14
68	41,23	328	20,01	588	36,28	848	35,53	1 108	45,33	1 368	62,82	1 628	86,77
69	42,85	329	20,3	589	37,58	849	34,01	1 109	45,24	1 369	63,03	1 629	87,03
70	44,1	330	19,53	590	38,58	850	32,88	1 110	45,14	1 370	63,62	1 630	86,96
71	44,37	331	17,92	591	39,1	851	32,52	1 111	45,06	1 371	64,8	1 631	87,1
72	44,3	332	16,17	592	39,22	852	32,7	1 112	44,82	1 372	65,5	1 632	86,99
73	44,17	333	14,55	593	39,11	853	33,48	1 113	44,53	1 373	65,33	1 633	86,92
74	44,13	334	12,92	594	38,8	854	34,97	1 114	44,77	1 374	63,83	1 634	87,1
75	44,17	335	11,07	595	38,31	855	36,78	1 115	45,6	1 375	62,44	1 635	86,85
76	44,51	336	8,54	596	37,73	856	38,64	1 116	46,28	1 376	61,2	1 636	86,92

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

77	45,16	337	5,15	597	37,24	857	40,48	1 117	47,18	1 377	59,58	1 637	86,77
78	45,64	338	1,96	598	37,06	858	42,34	1 118	48,49	1 378	57,68	1 638	86,88
79	46,16	339	0	599	37,1	859	44,16	1 119	49,42	1 379	56,4	1 639	86,63
80	46,99	340	0	600	37,42	860	45,9	1 120	49,56	1 380	54,82	1 640	86,85
81	48,19	341	0	601	38,17	861	47,55	1 121	49,47	1 381	52,77	1 641	86,63
82	49,32	342	0	602	39,19	862	49,09	1 122	49,28	1 382	52,22	1 642	86,77
83	49,7	343	0	603	40,31	863	50,42	1 123	48,58	1 383	52,48	1 643	86,77
84	49,5	344	0	604	41,46	864	51,49	1 124	48,03	1 384	52,74	1 644	86,55
85	48,98	345	0	605	42,44	865	52,23	1 125	48,2	1 385	53,14	1 645	86,59
86	48,65	346	0	606	42,95	866	52,58	1 126	48,72	1 386	53,03	1 646	86,55
87	48,65	347	0	607	42,9	867	52,63	1 127	48,91	1 387	52,55	1 647	86,7
88	48,87	348	0	608	42,43	868	52,49	1 128	48,93	1 388	52,19	1 648	86,44
89	48,97	349	0	609	41,74	869	52,19	1 129	49,05	1 389	51,09	1 649	86,7
90	48,96	350	0	610	41,04	870	51,82	1 130	49,23	1 390	49,88	1 650	86,55
91	49,15	351	0	611	40,49	871	51,43	1 131	49,28	1 391	49,37	1 651	86,33
92	49,51	352	0	612	40,8	872	51,02	1 132	48,84	1 392	49,26	1 652	86,48
93	49,74	353	0	613	41,66	873	50,61	1 133	48,12	1 393	49,37	1 653	86,19
94	50,31	354	0,9	614	42,48	874	50,26	1 134	47,8	1 394	49,88	1 654	86,37
95	50,78	355	2	615	42,78	875	50,06	1 135	47,42	1 395	50,25	1 655	86,59
96	50,75	356	4,08	616	42,39	876	49,97	1 136	45,98	1 396	50,17	1 656	86,55

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

97	50,78	357	7,07	617	40,78	877	49,67	1 137	42,96	1 397	50,5	1 657	86,7
98	51,21	358	10,25	618	37,72	878	48,86	1 138	39,38	1 398	50,83	1 658	86,63
99	51,6	359	12,77	619	33,29	879	47,53	1 139	35,82	1 399	51,23	1 659	86,55
100	51,89	360	14,44	620	27,66	880	45,82	1 140	31,85	1 400	51,67	1 660	86,59
101	52,04	361	15,73	621	21,43	881	43,66	1 141	26,87	1 401	51,53	1 661	86,55
102	51,99	362	17,23	622	15,62	882	40,91	1 142	21,41	1 402	50,17	1 662	86,7
103	51,99	363	19,04	623	11,51	883	37,78	1 143	16,41	1 403	49,99	1 663	86,55
104	52,36	364	20,96	624	9,69	884	34,89	1 144	12,56	1 404	50,32	1 664	86,7
105	52,58	365	22,94	625	9,46	885	32,69	1 145	10,41	1 405	51,05	1 665	86,52
106	52,47	366	25,05	626	10,21	886	30,99	1 146	9,07	1 406	51,45	1 666	86,85
107	52,03	367	27,31	627	11,78	887	29,31	1 147	7,69	1 407	52	1 667	86,55
108	51,46	368	29,54	628	13,6	888	27,29	1 148	6,28	1 408	52,3	1 668	86,81
109	51,31	369	31,52	629	15,33	889	24,79	1 149	5,08	1 409	52,22	1 669	86,74
110	51,45	370	33,19	630	17,12	890	21,78	1 150	4,32	1 410	52,66	1 670	86,63
111	51,48	371	34,67	631	18,98	891	18,51	1 151	3,32	1 411	53,18	1 671	86,77
112	51,29	372	36,13	632	20,73	892	15,1	1 152	1,92	1 412	53,8	1 672	87,03
113	51,12	373	37,63	633	22,17	893	11,06	1 153	1,07	1 413	54,53	1 673	87,07
114	50,96	374	39,07	634	23,29	894	6,28	1 154	0,66	1 414	55,37	1 674	86,92
115	50,81	375	40,08	635	24,19	895	2,24	1 155	0	1 415	56,29	1 675	87,07
116	50,86	376	40,44	636	24,97	896	0	1 156	0	1 416	57,31	1 676	87,18

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

117	51,34	377	40,26	637	25,6	897	0	1	0	1	57,94	1	87,32
								157		417		677	
118	51,68	378	39,29	638	25,96	898	0	1	0	1	57,86	1	87,36
								158		418		678	
119	51,58	379	37,23	639	25,86	899	0	1	0	1	57,75	1	87,29
								159		419		679	
120	51,36	380	34,14	640	24,69	900	0	1	0	1	58,67	1	87,58
								160		420		680	
121	51,39	381	30,18	641	21,85	901	0	1	0	1	59,4	1	87,61
								161		421		681	
122	50,98	382	25,71	642	17,45	902	2,56	1	0	1	59,69	1	87,76
								162		422		682	
123	48,63	383	21,58	643	12,34	903	4,81	1	0	1	60,02	1	87,65
								163		423		683	
124	44,83	384	18,5	644	7,59	904	6,38	1	0	1	60,21	1	87,61
								164		424		684	
125	40,3	385	16,56	645	4	905	8,62	1	0	1	60,83	1	87,65
								165		425		685	
126	35,65	386	15,39	646	1,76	906	10,37	1	0	1	61,16	1	87,65
								166		426		686	
127	30,23	387	14,77	647	0	907	11,17	1	0	1	61,6	1	87,76
								167		427		687	
128	24,08	388	14,58	648	0	908	13,32	1	0	1	62,15	1	87,76
								168		428		688	
129	18,96	389	14,72	649	0	909	15,94	1	0	1	62,7	1	87,8
								169		429		689	
130	14,19	390	15,44	650	0	910	16,89	1	0	1	63,65	1	87,72
								170		430		690	
131	8,72	391	16,92	651	0	911	17,13	1	0	1	64,27	1	87,69
								171		431		691	
132	3,41	392	18,69	652	0	912	18,04	1	0	1	64,31	1	87,54
								172		432		692	
133	0,64	393	20,26	653	0	913	19,96	1	0	1	64,13	1	87,76
								173		433		693	
134	0	394	21,63	654	0	914	22,05	1	0	1	64,27	1	87,5
								174		434		694	
135	0	395	22,91	655	0	915	23,65	1	0	1	65,22	1	87,43
								175		435		695	
136	0	396	24,13	656	0	916	25,72	1	0	1	66,25	1	87,47
								176		436		696	

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

137	0	397	25,18	657	0	917	28,62	1 177	0	1 437	67,09	1 697	87,5
138	0	398	26,16	658	2,96	918	31,99	1 178	0	1 438	68,37	1 698	87,5
139	0	399	27,41	659	7,9	919	35,07	1 179	0	1 439	69,36	1 699	87,18
140	0	400	29,18	660	13,49	920	37,42	1 180	0	1 440	70,57	1 700	87,36
141	0	401	31,36	661	18,36	921	39,65	1 181	0	1 441	71,89	1 701	87,29
142	0,63	402	33,51	662	22,59	922	41,78	1 182	0	1 442	73,35	1 702	87,18
143	1,56	403	35,33	663	26,26	923	43,04	1 183	0	1 443	74,64	1 703	86,92
144	2,99	404	36,94	664	29,4	924	43,55	1 184	0	1 444	75,81	1 704	87,36
145	4,5	405	38,6	665	32,23	925	42,97	1 185	0	1 445	77,24	1 705	87,03
146	5,39	406	40,44	666	34,91	926	41,08	1 186	0	1 446	78,63	1 706	87,07
147	5,59	407	42,29	667	37,39	927	40,38	1 187	0	1 447	79,32	1 707	87,29
148	5,45	408	43,73	668	39,61	928	40,43	1 188	0	1 448	80,2	1 708	86,99
149	5,2	409	44,47	669	41,61	929	40,4	1 189	0	1 449	81,67	1 709	87,25
150	4,98	410	44,62	670	43,51	930	40,25	1 190	0	1 450	82,11	1 710	87,14
151	4,61	411	44,41	671	45,36	931	40,32	1 191	0	1 451	82,91	1 711	86,96
152	3,89	412	43,96	672	47,17	932	40,8	1 192	0	1 452	83,43	1 712	87,14
153	3,21	413	43,41	673	48,95	933	41,71	1 193	0	1 453	83,79	1 713	87,07
154	2,98	414	42,83	674	50,73	934	43,16	1 194	0	1 454	83,5	1 714	86,92
155	3,31	415	42,15	675	52,36	935	44,84	1 195	0	1 455	84,01	1 715	86,88
156	4,18	416	41,28	676	53,74	936	46,42	1 196	1,54	1 456	83,43	1 716	86,85



**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

157	5,07	417	40,17	677	55,02	937	47,91	1 197	4,85	1 457	82,99	1 717	86,92
158	5,52	418	38,9	678	56,24	938	49,08	1 198	9,06	1 458	82,77	1 718	86,81
159	5,73	419	37,59	679	57,29	939	49,66	1 199	11,8	1 459	82,33	1 719	86,88
160	6,06	420	36,39	680	58,18	940	50,15	1 200	12,42	1 460	81,78	1 720	86,66
161	6,76	421	35,33	681	58,95	941	50,94	1 201	12,07	1 461	81,81	1 721	86,92
162	7,7	422	34,3	682	59,49	942	51,69	1 202	11,64	1 462	81,05	1 722	86,48
163	8,34	423	33,07	683	59,86	943	53,5	1 203	11,69	1 463	80,72	1 723	86,66
164	8,51	424	31,41	684	60,3	944	55,9	1 204	12,91	1 464	80,61	1 724	86,74
165	8,22	425	29,18	685	61,01	945	57,11	1 205	15,58	1 465	80,46	1 725	86,37
166	7,22	426	26,41	686	61,96	946	57,88	1 206	18,69	1 466	80,42	1 726	86,48
167	5,82	427	23,4	687	63,05	947	58,63	1 207	21,04	1 467	80,42	1 727	86,33
168	4,75	428	20,9	688	64,16	948	58,75	1 208	22,62	1 468	80,24	1 728	86,3
169	4,24	429	19,59	689	65,14	949	58,26	1 209	24,34	1 469	80,13	1 729	86,44
170	4,05	430	19,36	690	65,85	950	58,03	1 210	26,74	1 470	80,39	1 730	86,33
171	3,98	431	19,79	691	66,22	951	58,28	1 211	29,62	1 471	80,72	1 731	86
172	3,91	432	20,43	692	66,12	952	58,67	1 212	32,65	1 472	81,01	1 732	86,33
173	3,86	433	20,71	693	65,01	953	58,76	1 213	35,57	1 473	81,52	1 733	86,22
174	4,17	434	20,56	694	62,22	954	58,82	1 214	38,07	1 474	82,4	1 734	86,08
175	5,32	435	19,96	695	57,44	955	59,09	1 215	39,71	1 475	83,21	1 735	86,22
176	7,53	436	20,22	696	51,47	956	59,38	1 216	40,36	1 476	84,05	1 736	86,33

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

177	10,89	437	21,48	697	45,98	957	59,72	1 217	40,6	1 477	84,85	1 737	86,33
178	14,81	438	23,67	698	41,72	958	60,04	1 218	41,15	1 478	85,42	1 738	86,26
179	17,56	439	26,09	699	38,22	959	60,13	1 219	42,23	1 479	86,18	1 739	86,48
180	18,38	440	28,16	700	34,65	960	59,33	1 220	43,61	1 480	86,45	1 740	86,48
181	17,49	441	29,75	701	30,65	961	58,52	1 221	45,08	1 481	86,64	1 741	86,55
182	15,18	442	30,97	702	26,46	962	57,82	1 222	46,58	1 482	86,57	1 742	86,66
183	13,08	443	31,99	703	22,32	963	56,68	1 223	48,13	1 483	86,43	1 743	86,66
184	12,23	444	32,84	704	18,15	964	55,36	1 224	49,7	1 484	86,58	1 744	86,59
185	12,03	445	33,33	705	13,79	965	54,63	1 225	51,27	1 485	86,8	1 745	86,55
186	11,72	446	33,45	706	9,29	966	54,04	1 226	52,8	1 486	86,65	1 746	86,74
187	10,69	447	33,27	707	4,98	967	53,15	1 227	54,3	1 487	86,14	1 747	86,21
188	8,68	448	32,66	708	1,71	968	52,02	1 228	55,8	1 488	86,36	1 748	85,96
189	6,2	449	31,73	709	0	969	51,37	1 229	57,29	1 489	86,32	1 749	85,5
190	4,07	450	30,58	710	0	970	51,41	1 230	58,73	1 490	86,25	1 750	84,77
191	2,65	451	29,2	711	0	971	52,2	1 231	60,12	1 491	85,92	1 751	84,65
192	1,92	452	27,56	712	0	972	53,52	1 232	61,5	1 492	86,14	1 752	84,1
193	1,69	453	25,71	713	0	973	54,34	1 233	62,94	1 493	86,36	1 753	83,46
194	1,68	454	23,76	714	0	974	54,59	1 234	64,39	1 494	86,25	1 754	82,77
195	1,66	455	21,87	715	0	975	54,92	1 235	65,52	1 495	86,5	1 755	81,78
196	1,53	456	20,15	716	0	976	55,69	1 236	66,07	1 496	86,14	1 756	81,16

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

197	1,3	457	18,38	717	0	977	56,51	1 237	66,19	1 497	86,29	1 757	80,42
198	1	458	15,93	718	0	978	56,73	1 238	66,19	1 498	86,4	1 758	79,21
199	0,77	459	12,33	719	0	979	56,33	1 239	66,43	1 499	86,36	1 759	78,48
200	0,63	460	7,99	720	0	980	55,38	1 240	67,07	1 500	85,63	1 760	77,49
201	0,59	461	4,19	721	0	981	54,99	1 241	68,04	1 501	86,03	1 761	76,69
202	0,59	462	1,77	722	0	982	54,75	1 242	69,12	1 502	85,92	1 762	75,92
203	0,57	463	0,69	723	0	983	54,11	1 243	70,08	1 503	86,14	1 763	75,08
204	0,53	464	1,13	724	0	984	53,32	1 244	70,91	1 504	86,32	1 764	73,87
205	0,5	465	2,2	725	0	985	52,41	1 245	71,73	1 505	85,92	1 765	72,15
206	0	466	3,59	726	0	986	51,45	1 246	72,66	1 506	86,11	1 766	69,69
207	0	467	4,88	727	0	987	50,86	1 247	73,67	1 507	85,91	1 767	67,17
208	0	468	5,85	728	0	988	50,48	1 248	74,55	1 508	85,83	1 768	64,75
209	0	469	6,72	729	0	989	49,6	1 249	75,18	1 509	85,86	1 769	62,55
210	0	470	8,02	730	0	990	48,55	1 250	75,59	1 510	85,5	1 770	60,32
211	0	471	10,02	731	0	991	47,87	1 251	75,82	1 511	84,97	1 771	58,45
212	0	472	12,59	732	0	992	47,42	1 252	75,9	1 512	84,8	1 772	56,43
213	0	473	15,43	733	0	993	46,86	1 253	75,92	1 513	84,2	1 773	54,35
214	0	474	18,32	734	0	994	46,08	1 254	75,87	1 514	83,26	1 774	52,22
215	0	475	21,19	735	0	995	45,07	1 255	75,68	1 515	82,77	1 775	50,25
216	0	476	24	736	0	996	43,58	1 256	75,37	1 516	81,78	1 776	48,23

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

217	0	477	26,75	737	0	997	41,04	1	75,01	1	81,16	1	46,51
								257		517		777	
218	0	478	29,53	738	0	998	38,39	1	74,55	1	80,42	1	44,35
								258		518		778	
219	0	479	32,31	739	0	999	35,69	1	73,8	1	79,21	1	41,97
								259		519		779	
220	0	480	34,8	740	0	1	32,68	1	72,71	1	78,83	1	39,33
						000		260		520		780	
221	0	481	36,73	741	0	1	29,82	1	71,39	1	78,52	1	36,48
						001		261		521		781	
222	0	482	38,08	742	0	1	26,97	1	70,02	1	78,52	1	33,8
						002		262		522		782	
223	0	483	39,11	743	0	1	24,03	1	68,71	1	78,81	1	31,09
						003		263		523		783	
224	0	484	40,16	744	0	1	21,67	1	67,52	1	79,26	1	28,24
						004		264		524		784	
225	0	485	41,18	745	0	1	20,34	1	66,44	1	79,61	1	26,81
						005		265		525		785	
226	0,73	486	41,75	746	0	1	18,9	1	65,45	1	80,15	1	23,33
						006		266		526		786	
227	0,73	487	41,87	747	0	1	16,21	1	64,49	1	80,39	1	19,01
						007		267		527		787	
228	0	488	41,43	748	0	1	13,84	1	63,54	1	80,72	1	15,05
						008		268		528		788	
229	0	489	39,99	749	0	1	12,25	1	62,6	1	81,01	1	12,09
						009		269		529		789	
230	0	490	37,71	750	0	1	10,4	1	61,67	1	81,52	1	9,49
						010		270		530		790	
231	0	491	34,93	751	0	1	7,94	1	60,69	1	82,4	1	6,81
						011		271		531		791	
232	0	492	31,79	752	0	1	6,05	1	59,64	1	83,21	1	4,28
						012		272		532		792	
233	0	493	28,65	753	0	1	5,67	1	58,6	1	84,05	1	2,09
						013		273		533		793	
234	0	494	25,92	754	0	1	6,03	1	57,64	1	85,15	1	0,88
						014		274		534		794	
235	0	495	23,91	755	0	1	7,68	1	56,79	1	85,92	1	0,88
						015		275		535		795	
236	0	496	22,81	756	0	1	10,97	1	55,95	1	86,98	1	0
						016		276		536		796	

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

237	0	497	22,53	757	0	1 017	14,72	1 277	55,09	1 537	87,45	1 797	0
238	0	498	22,62	758	0	1 018	17,32	1 278	54,2	1 538	87,54	1 798	0
239	0	499	22,95	759	0	1 019	18,59	1 279	53,33	1 539	87,25	1 799	0
240	0	500	23,51	760	0	1 020	19,35	1 280	52,52	1 540	87,04	1 800	0
241	0	501	24,04	761	0	1 021	20,54	1 281	51,75	1 541	86,98		
242	0	502	24,45	762	0	1 022	21,33	1 282	50,92	1 542	87,05		
243	0	503	24,81	763	0	1 023	22,06	1 283	49,9	1 543	87,1		
244	0	504	25,29	764	0	1 024	23,39	1 284	48,68	1 544	87,25		
245	0	505	25,99	765	0	1 025	25,52	1 285	47,41	1 545	87,25		
246	0	506	26,83	766	0	1 026	28,28	1 286	46,5	1 546	87,07		
247	0	507	27,6	767	0	1 027	30,38	1 287	46,22	1 547	87,29		
248	0	508	28,17	768	0	1 028	31,22	1 288	46,44	1 548	87,14		
249	0	509	28,63	769	0	1 029	32,22	1 289	47,35	1 549	87,03		
250	0	510	29,04	770	0	1 030	33,78	1 290	49,01	1 550	87,25		
251	0	511	29,43	771	0	1 031	35,08	1 291	50,93	1 551	87,03		
252	0	512	29,78	772	1,6	1 032	35,91	1 292	52,79	1 552	87,03		
253	1,51	513	30,13	773	5,03	1 033	36,06	1 293	54,66	1 553	87,07		
254	4,12	514	30,57	774	9,49	1 034	35,5	1 294	56,6	1 554	86,81		
255	7,02	515	31,1	775	13	1 035	34,76	1 295	58,55	1 555	86,92		
256	9,45	516	31,65	776	14,65	1 036	34,7	1 296	60,47	1 556	86,66		

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

257	11,86	517	32,14	777	15,15	1 037	35,41	1 297	62,28	1 557	86,92		
258	14,52	518	32,62	778	15,67	1 038	36,65	1 298	63,9	1 558	86,59		
259	17,01	519	33,25	779	16,76	1 039	37,57	1 299	65,2	1 559	86,92		
260	19,48	520	34,2	780	17,88	1 040	38,51	1 300	66,02	1 560	86,59		

## Appendix 6

### Drain and weigh procedure

1. The engine shall be filled with new oil. If a constant volume oil sump system (as described in ASTM standard D7156-09) is used, the oil pump shall be turned on while filling the engine. Enough oil charge shall be added to fill up both the engine and external sump.
2. The engine shall be started and operated over the desired test cycle (see points 2.2.15 and 2.4.4.8.3.1) for a minimum of 1 hour.
3. Once the cycle is complete, oil temperature shall be allowed to stabilise at a steady-state engine condition before shutting the engine down.
4. A clean, empty oil drain pan shall be weighed.
5. Any clean supplies that are to be used during the oil drain (e.g. rags) shall be weighed.
6. The oil shall be drained for 10 minutes with the external oil pump (if equipped) powered on followed by an additional ten minutes with the pump powered off. If a constant volume sump system is not used, the oil shall be drained from the engine for a total of 20 minutes.
7. The drained oil shall be weighed.
8. The weight determined in accordance with step 7 shall be subtracted from the weight determined in accordance with step 4. The difference corresponds to the total weight of the oil removed from the engine and collected in the drain pan.
9. The oil shall be carefully returned to the engine.
10. The empty drain pan shall be weighted.
11. The weight determined in accordance with step 10 shall be subtracted from the weight determined in accordance with step 4. The result corresponds to the weight of the residual oil in the drain pan that was not returned to the engine.
12. Any dirty supplies which have previously been weighed pursuant to step 5 shall be weighed.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)


---

13. The weight determined in accordance with step 12 shall be subtracted from the weight determined in accordance with step 5. The result corresponds to the weight of the residual oil which remained on the dirty supplies that was not returned to the engine.
14. The residual oil weights calculated in accordance with steps 11 and 13 shall be subtracted from the total weight of the oil removed, calculated in accordance with step 8. The difference between those weights corresponds to the total weight of the oil returned to the engine.
15. The engine shall be operated under the desired test cycle(s) (see points 2.2.15 and 2.4.4.8.3.1).
16. Steps 3-8 shall be repeated.
17. The weight of the oil drained pursuant to step 16 shall be subtracted from the weight obtained in accordance with step 14. The difference between those weights corresponds to the total weight of the oil consumed.
18. The total weight of the oil consumed calculated pursuant to step 14 shall be divided by the duration, in hours, of the test cycles carried out in accordance with step 15. The result is the lubricant consumption rate.

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

## Appendix 7

### Example of service accumulation schedule including thermal, lubricant consumption and regeneration sequences

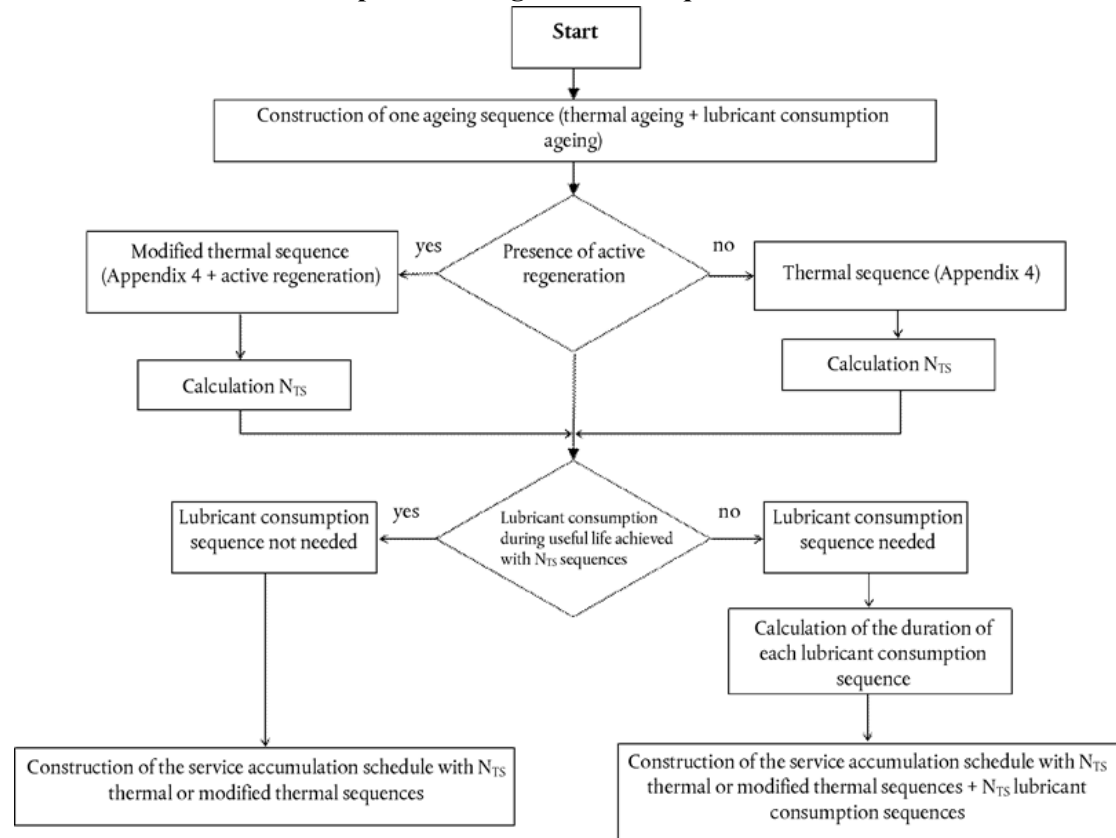




*Changes to legislation:* There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

## Appendix 8

### Flowchart on the performance of the service accumulation schedule Example Service Accumulation Cycle

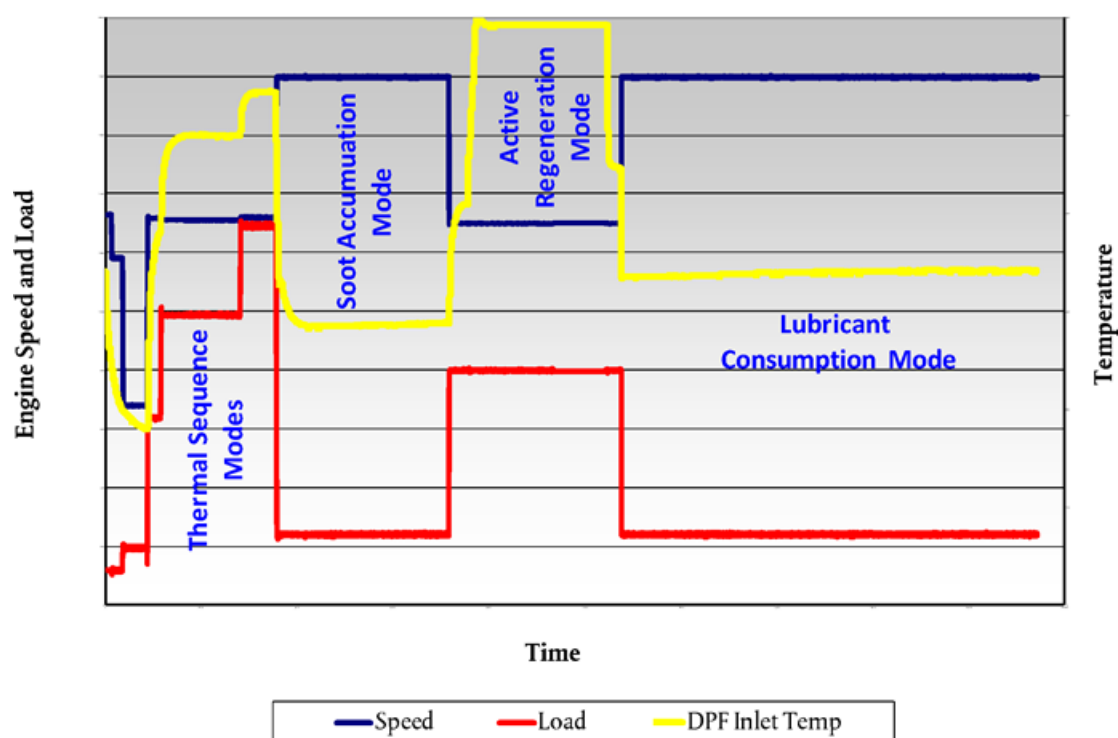

## ANNEX V

Annex XIII to Regulation (EU) No 582/2011 is amended as follows:

(1) points 2.1.2.2.1 and 2.1.2.2.2 are replaced by the following:

2.1.2.2.1. The provisions on reagent quality monitoring set out in points 7 to 7.1.3 of this Annex shall apply, instead of points 4.1 and 4.2 of Annex XVI to Regulation (EC) No 692/2008.

2.1.2.2.2. The provisions on reagent consumption monitoring and dosing activity set out in points 8, 8.1 and 8.1.1 of this Annex shall apply, instead of points 5 to 5.5 of Annex XVI to Regulation (EC) No 692/2008.;

(2) points 8 and 8.1 are replaced by the following:

### 8. REAGENT CONSUMPTION AND DOSING ACTIVITY

8.1. The measures regarding reagent consumption monitoring and dosing activity shall be those set out in paragraph 8 of Annex 11 to UN/ECE Regulation No 49..

---

*Changes to legislation: There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)*

---

## ANNEX VI

Annex XIV to Regulation (EU) No 582/2011 is amended as follows:

(1) point 2.2.1 is replaced by the following:

2.2.1. For positive-ignition engines fuelled with petrol or E85, paragraph 5.2.3.1 of UN/ECE Regulation No 85 shall be understood as follows:

The fuel used shall be the one available on the market. In any case of dispute the fuel shall be the appropriate reference fuel specified in Annex IX to Regulation (EU) No 582/2011.’;

(2) point 2.2.4 is replaced by the following:

2.2.4. For compression-ignition engines, paragraph 5.2.3.4 of UN/ECE Regulation 85 shall be understood as follows:

The fuel used shall be the one available on the market. In any case of dispute the fuel shall be the appropriate reference fuel specified in Annex IX to Regulation (EU) No 582/2011.’.

---

**Changes to legislation:** There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718. (See end of Document for details)

---

- (1) [OJ L 188, 18.7.2009, p. 1.](#)
- (2) Commission Regulation (EU) No 582/2011 of 25 May 2011 implementing and amending Regulation (EC) No 595/2009 of the European Parliament and of the Council with respect to emissions from heavy duty vehicles (Euro VI) and amending Annexes I and III to Directive 2007/46/EC of the European Parliament and of the Council ([OJ L 167, 25.6.2011, p. 1.](#)).
- (3) Directive 98/70/EC of the European Parliament and of the Council of 13 October 1998 relating to the quality of petrol and diesel fuels and amending Council Directive 93/12/EEC ([OJ L 350, 28.12.1998, p. 58.](#));

**Changes to legislation:**

There are currently no known outstanding effects for the Commission Regulation (EU) 2016/1718.